


BEGA

Photometric Filename: 33832.ies

TEST: BE_33832
 TEST LAB: BEGA
 DATE: 5/18/2016
 LUMINAIRE: 33 832
 LAMP: 3.4W LED 24V DC

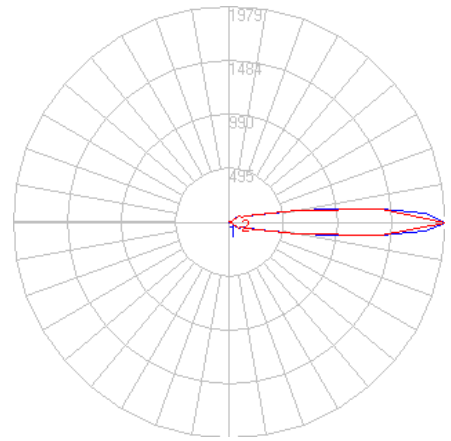


Characteristics


NEMA Type	3 H x 3 V
Maximum Candela	1979.1
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	15.2
Vertical Beam Angle (50%)	14.7
Horizontal Field Angle (10%)	36.4
Vertical Field Angle (10%)	35.7
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	67
Beam Efficiency	N.A.
Field Lumens	174
Field Efficiency	N.A.
Spill Lumens	98
Luminaire Lumens	272
Total Efficiency	N.A.
Total Luminaire Watts	5

Zonal Lumen Summary

Zone	Lumens
0-10	0.01
10-20	0.02
20-30	0.05
30-40	0.22
40-50	0.48
50-60	2.82
60-70	14.29
70-80	31.77
80-90	84.81
90-100	84.81
100-110	31.77
110-120	14.29
120-130	2.82
130-140	0.48
140-150	0.22
150-160	0.05
160-170	0.02
170-180	0.01

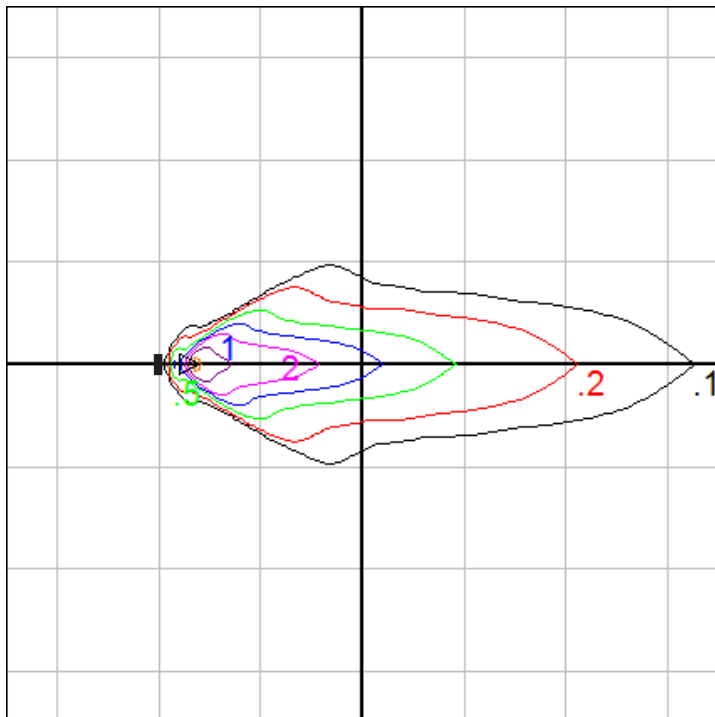

Wall Mount - Isofootcandle grid on floor
 Mounting Height = 1 ft. Grid Spacing = 5 ft.

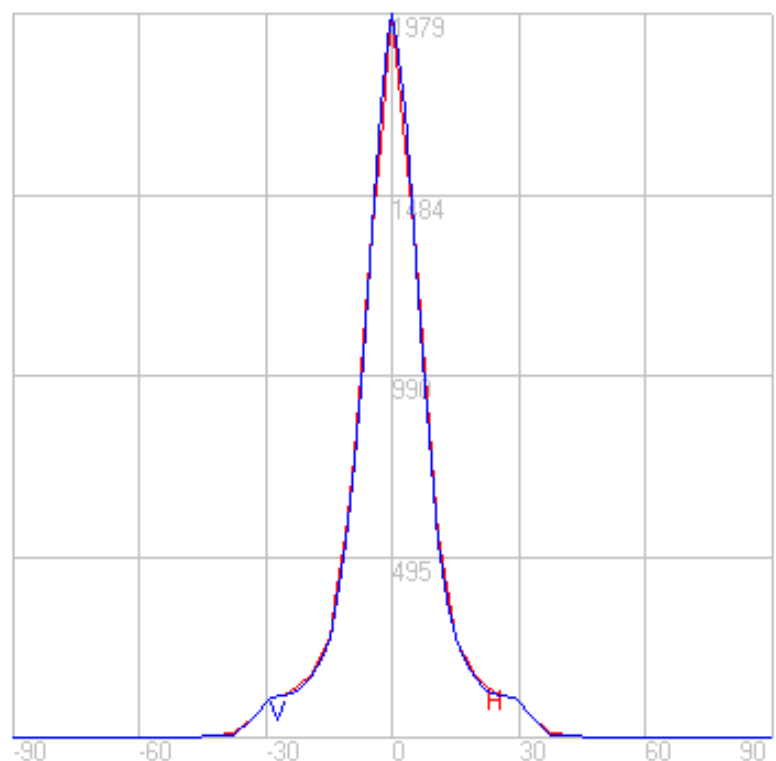

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.