


BEGA

Photometric Filename: 33881.ies

TEST: BE_33881
TEST LAB: BEGA
DATE: 10/07/2015
LUMINAIRE: 33 881
LAMP: 0.2W LED 24V DC

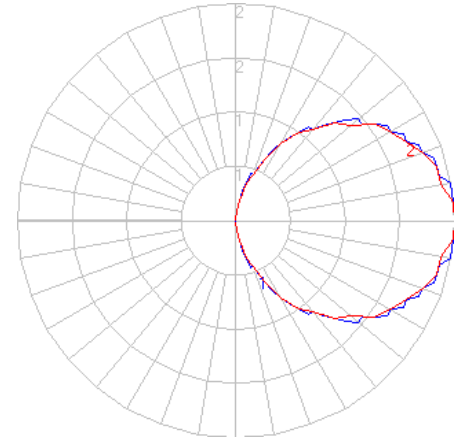


Characteristics

IES Classification	N.A.
Longitudinal Classification	N.A.
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	6
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	6
Total Luminaire Watts	1
Ballast Factor	1.00
Upward Waste Light Ratio	0.50
Max. Cd.	2.2 (10H, 95V)
Max. Cd. (<90 Vert.)	2.2 (10H, 87.5V)
Max. Cd. (At 90 Deg. Vert.)	2.2 (36.7%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	2.2 (36.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	0.1	N.A.	2.1
FM (30-60)	1.0	N.A.	16.0
FH (60-80)	1.2	N.A.	20.2
FVH(80-90)	0.7	N.A.	11.6
BL (0-30)	0.0	N.A.	0.0
BM (30-60)	0.0	N.A.	0.0
BH (60-80)	0.0	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL (90-100)	0.7	N.A.	11.6
UH (100-180)	2.3	N.A.	38.3
Total	6.0	N.A.	100.0

BUG Rating B0-U1-G0

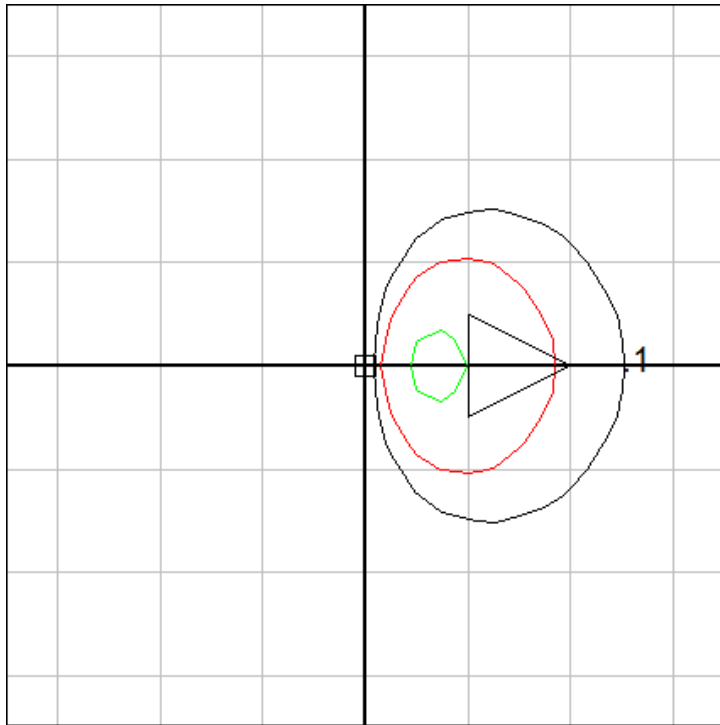

Mounting Height = 1 ft. Grid Spacing = 1 ft.

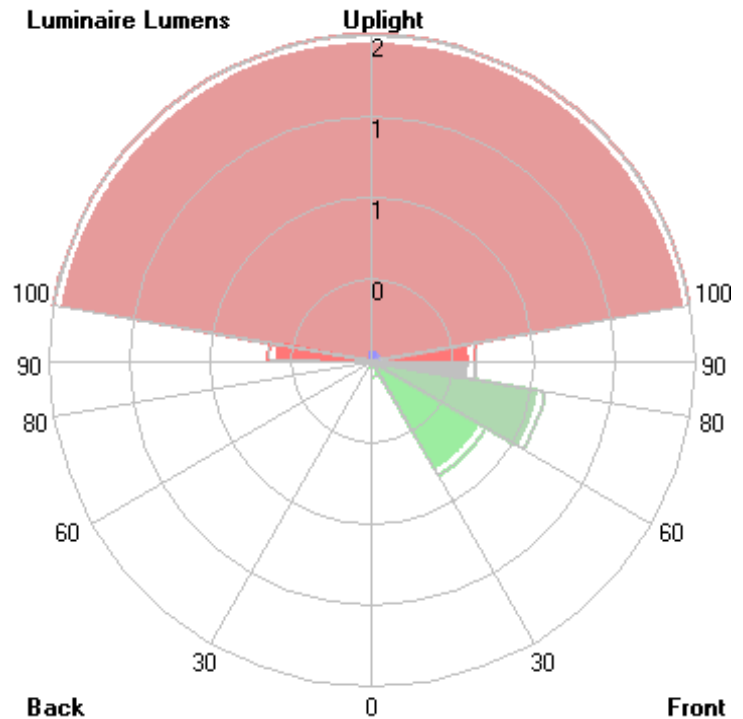

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

9/12/2017