
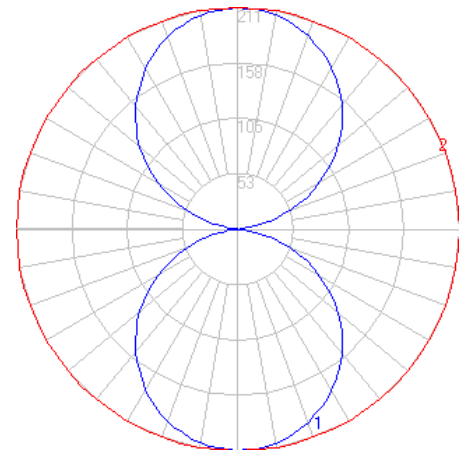


BEGA

Photometric Filename: 44437.IES

TEST: BE_44437
TEST LAB: BEGA
DATE: 2/13/2017
LUMINAIRE: 44 437
LAMP: 23W LED




Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1186
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	44
Total Luminaire Watts	27
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	3.84 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	19.94
10-20	57.07
20-30	86.48
30-40	104.32
40-50	108.23
50-60	97.44
60-70	72.96
70-80	38.76
80-90	7.57
90-100	7.57
100-110	38.76
110-120	72.96
120-130	97.44
130-140	108.23
140-150	104.32
150-160	86.48
160-170	57.07
170-180	19.94

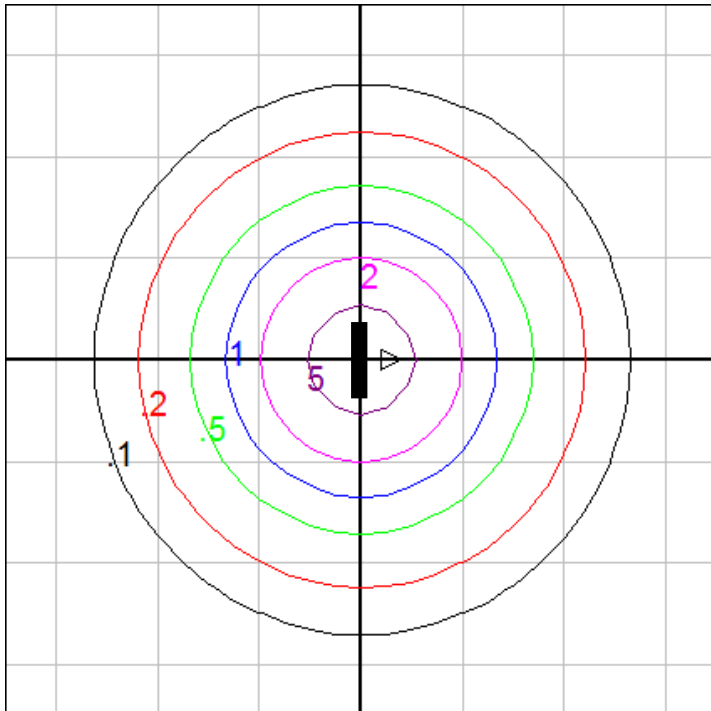

Wall mount - isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

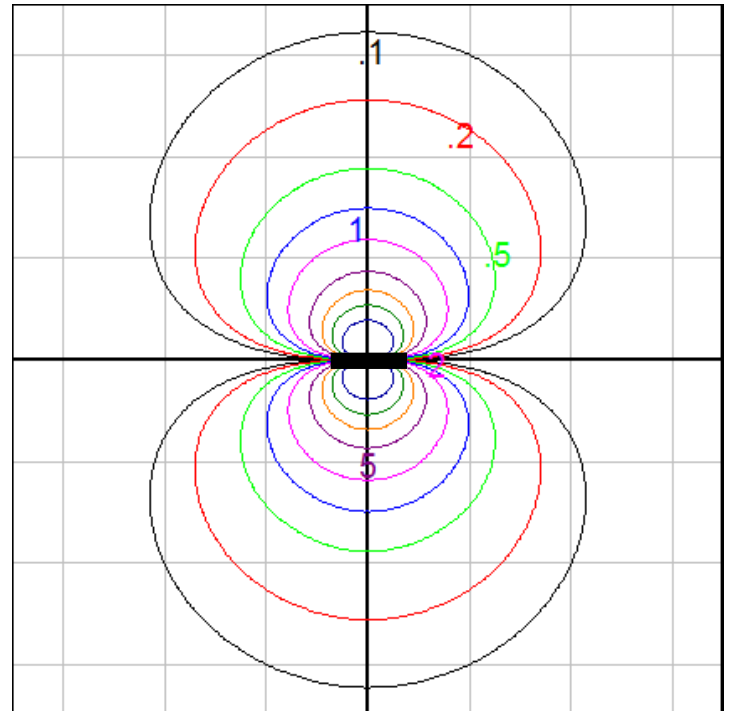

Wall mount - isofootcandle grid on wall
Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

8/21/2018