



Tools Required:

- 2.5mm hex key
- Phillips head screw driver medium



Dimensions

- A:** 3-1/2 "
- B:** 4-3/4 "
- C:** 4 "



Weight: 1.3 lbs.

Notice to Installer for 50 063:

1. See page 2 for specific product safety warnings.
2. Select the desired trim ring or housing material finish by using appropriate code number as suffix.
 - Code number .1 - White
 - Code number .4 - Palladium
 - Code number .5 - Velvet black
3. Mounts directly to recessed BEGA 19 538 small opening wiring box (provided).
4. See installation sheet 99068 for detailed instructions on 19538 small wiring box installation. NOTE: Mounting strap not used for this model - luminaire base mounts directly to 19 538 small opening wiring box.


NOTE: Be sure to install 19 538 small wiring box with mounting holes oriented in the horizontal position.

WARNING: LEDs are high quality electrical components. Please avoid touching them directly during installation.

50 063 - installation:

1. Loosen 2.5mm set screw on top of luminaire and remove the outer housing.
2. Route LED wiring into small opening wiring box for connections to be made.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
 - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach luminaire base directly to 19 538 small opening wiring box by using (2) 1/2" 8-32 screws (provided).
5. Replace the luminaire outer housing and secure by tightening set screw.

Figure 1

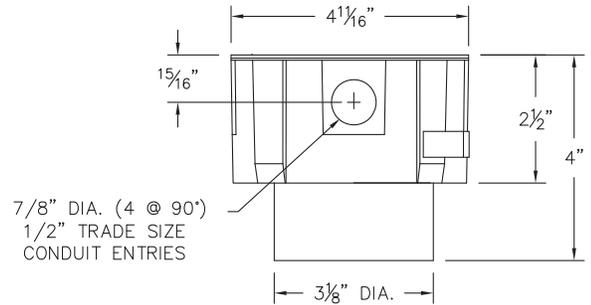

SMALL OPENING WIRING BOX DETAIL

Relamping/Maintenance

Loosen set screw on top of luminaire housing. Clean glass and luminaire using only solvent-free cleansers. Replace luminaire housing and tighten set screw.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED driver (120-277V)	76043
LED module (3000K)	LED-0276/830
LED module (4000K)	LED-0276/840

Lamp: 7.6W LED Module

Small-opening wiring box 19538

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
