



**Tools Required:**

- 2.5mm hex key
- Flat head screw driver medium



**Dimensions**

- A:** 4-3/4 "
- B:** 6 "
- C:** 5-1/8 "



**Weight:** 3.53 lbs

**Notice to Installer for 50 064:**


1. See page 2 for specific product safety warnings.
2. Select the desired trim ring or housing material finish by using appropriate code number as suffix.
  - 50 064.1 - White
  - 50 064.2 - Stainless steel
  - 50 064.3 - Chrome
3. Mounts directly to wall over standard recessed single-gang junction box (by others).

**50 064 - installation:**

1. Remove faceplate from base of luminaire by unscrewing (2) 2.5mm set screws.
2. Feed luminaire wires through base of the luminaire.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

**Dimming (if applicable):**

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Mount luminaire base directly to recessed octagonal junction box using mounting kit (included)
  5. Replace faceplate by evenly tightening (2) set screws.

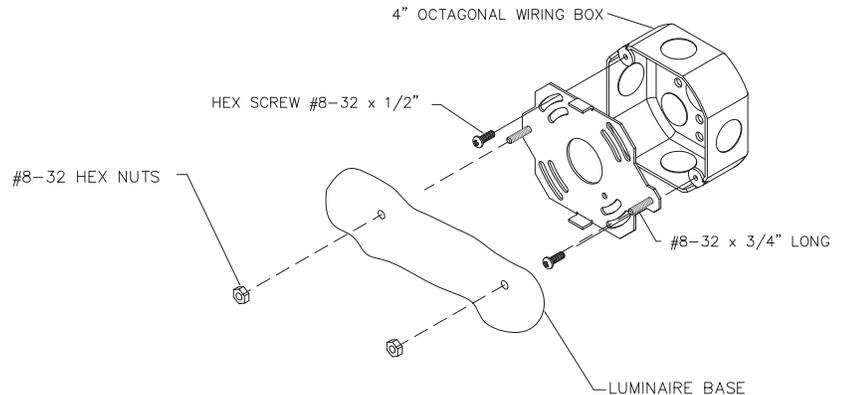

**Relamping/Maintenance**

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass .

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Driver (120-277V)	76048
LED Module (3000K)	LED-0275/830
LED Module (4000K)	LED-0275/840

**Lamp:** 16.6W LED Module

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**