
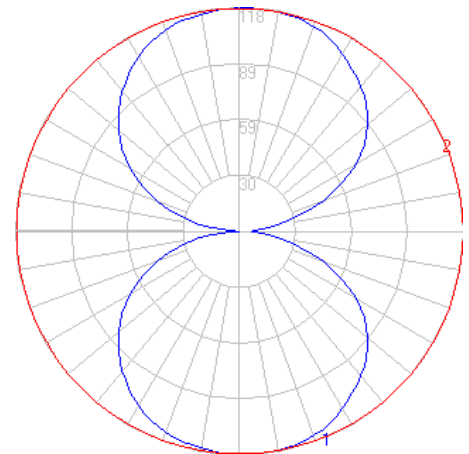


BEGA

Photometric Filename: 50072.IES

TEST: LI_50072
TEST LAB: BEGA
DATE: 5/24/2016
LUMINAIRE: 50 072
LAMP: 12.2W LED

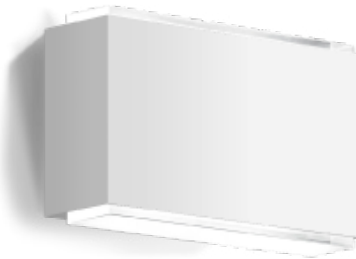


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	782
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	49
Total Luminaire Watts	16
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.12 ft
Luminous Width (90-270)	0.55 ft
Luminous Height	0.03 ft

Zonal Lumen Summary

Zone	Lumens
0-10	11.20
10-20	32.47
20-30	50.32
30-40	62.49
40-50	67.80
50-60	65.25
60-70	53.79
70-80	34.03
80-90	13.78
90-100	13.78
100-110	34.03
110-120	53.79
120-130	65.25
130-140	67.80
140-150	62.49
150-160	50.32
160-170	32.47
170-180	11.20

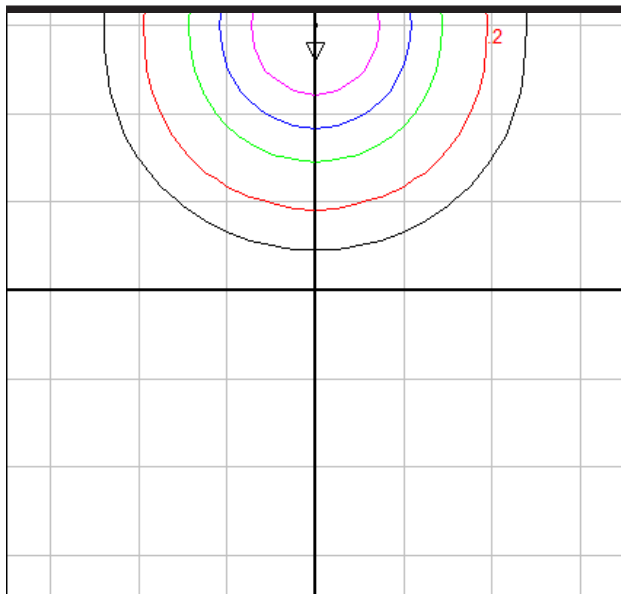

Mounting Height = 5 ft. Grid Spacing = 5 ft.
Isofootcandle grid on floor

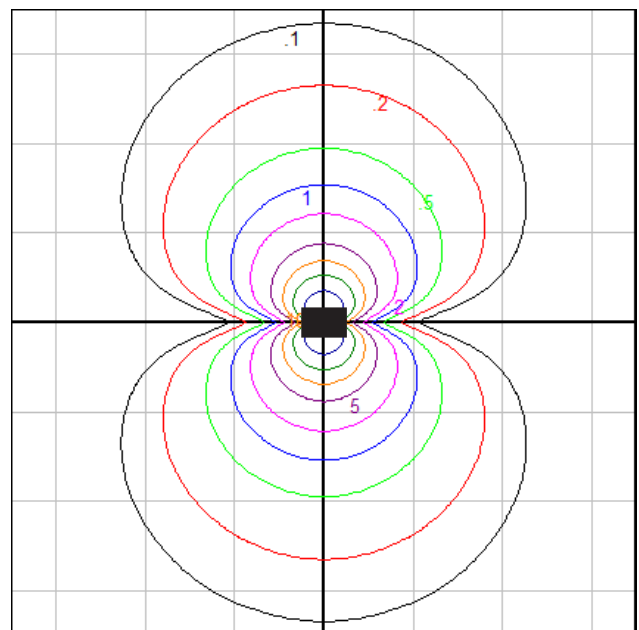

Grid Spacing = 2.5 ft.
Isofootcandle grid on wall