


BEGA

Photometric Filename: 50085.IES

TEST: LI_50085
TEST LAB: BEGA
DATE: 4/29/2016
LUMINAIRE: 50 085.X
LAMP: 36.4W LED

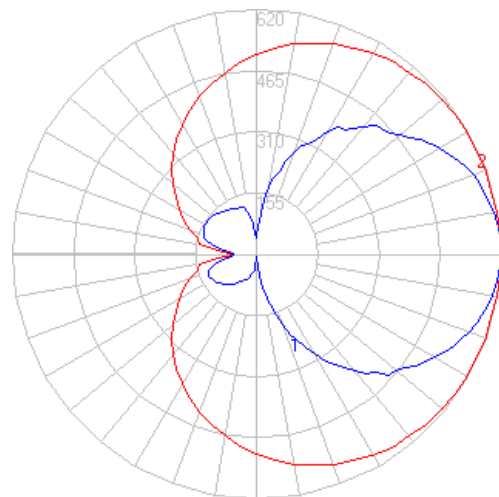


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4498
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	107
Total Luminaire Watts	42
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.36 ft (Diameter)
Luminous Height	2.30 ft

Zonal Lumen Summary

Zone	Lumens
0-10	4.03
10-20	32.11
20-30	85.87
30-40	159.25
40-50	242.39
50-60	325.29
60-70	400.66
70-80	456.36
80-90	484.73
90-100	485.49
100-110	459.73
110-120	408.04
120-130	337.26
130-140	258.72
140-150	182.56
150-160	112.55
160-170	53.15
170-180	9.95

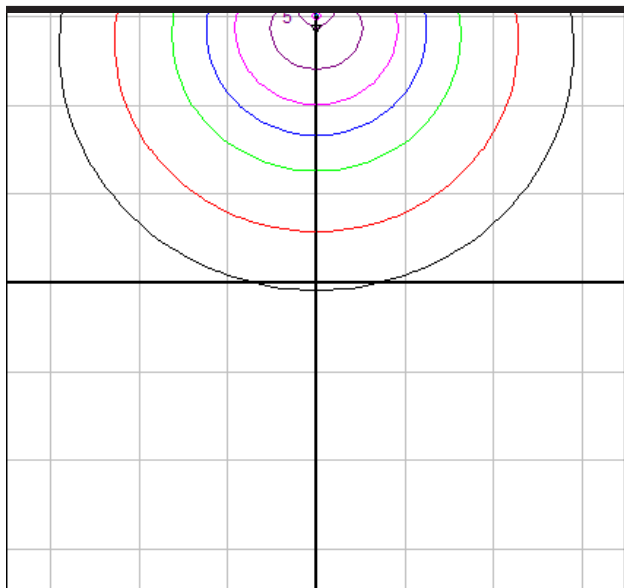

Mounting Height = 5 ft. Grid Spacing = 10 ft.
Isofootcandle grid on floor

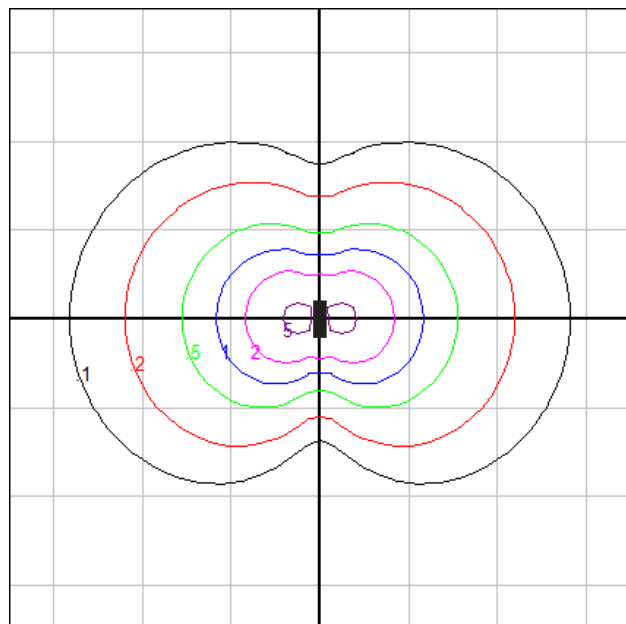

Grid Spacing = 10 ft.
Isofootcandle grid on wall