


BEGA

Photometric Filename: 50143.IES

TEST: LI_50143
TEST LAB: BEGA
DATE: 10/27/2016
LUMINAIRE: 50 143
LAMP: 52.8W LED

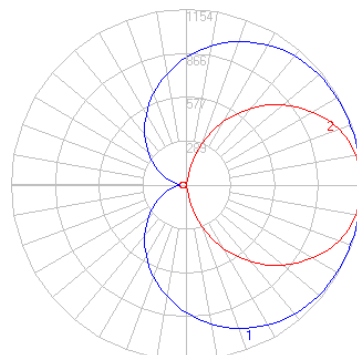


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	7010
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	115
Total Luminaire Watts	61
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Hor. Cylinder
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	5.08 ft
Luminous Height	0.17 ft (Diameter)

Zonal Lumen Summary

Zone	Lumens
0-10	79.85
10-20	231.54
20-30	360.51
30-40	455.22
40-50	508.92
50-60	520.58
60-70	495.91
70-80	448.98
80-90	403.71
90-100	403.71
100-110	448.98
110-120	495.91
120-130	520.58
130-140	508.92
140-150	455.22
150-160	360.51
160-170	231.54
170-180	79.85

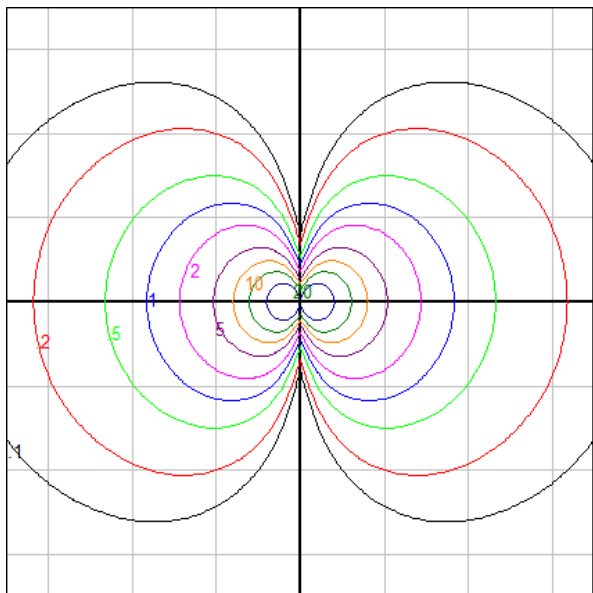

Wall Mount (Vertical) *Isofootcandle grid on wall
Grid Spacing = 5 ft.

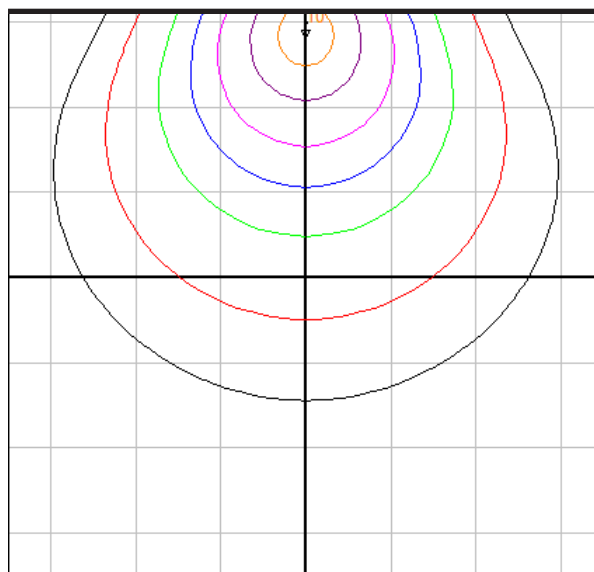

Wall Mount (Vertical) *Isofootcandle grid on floor
Mounting Height = 8 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.