

Tools Required:

Phillips medium screwdriver
Standard medium screwdriver
3mm hex head

Dimensions

A: 80-3/4"
B: 2"
C: 3-1/8"

Weight: 10.8 lbs.



Notice to Installer for 50 144:

1. Rated for damp locations - for interior applications only.
2. Luminaire mounting canopy mounts directly to finished surface over BEGA recessed wiring box 19 537.
3. LEDs are high quality electronic components! Please avoid touching the light output opening of the LED directly during installation.



19 537 - wiring box installation:

1. **Hollow (stud) wall construction** - Secure wiring box to wood or metal vertical blocking. Connect conduit to wiring box (if needed) and pull wires for electrical connections to be made later.
2. **Poured concrete construction** - Attach wiring box to the concrete form. Connect conduit to wiring box (if needed) and pull wires for electrical connections to be made later. Pour concrete and remove form.

IMPORTANT: Do not pour concrete directly on to box!

50 144 installation:

1. Undo hex screw on side of luminaire cap to remove glass.
2. Route wires through luminaire base.
3. Make supply wiring and luminaire wiring connections inside wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach luminaire base to finished surface using appropriate hardware (by others)
5. Carefully replace glass and fix hex screw to secure.

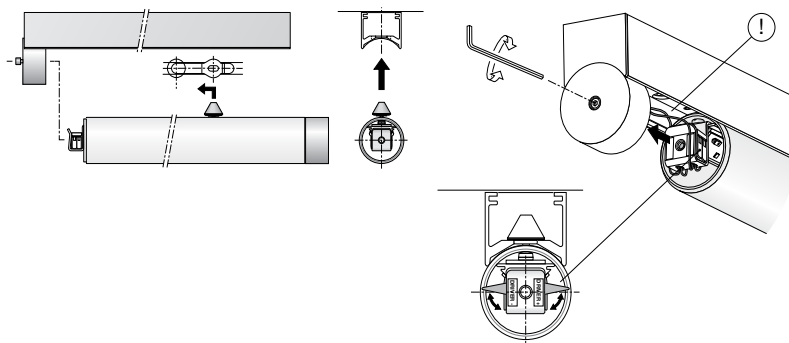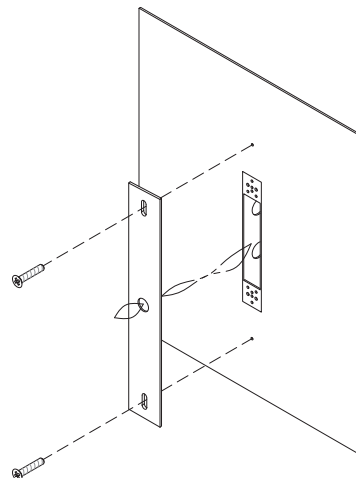

Relamping/Maintenance

Clean dirt and deposits from the luminaire and glass using only solvent-free cleaners. Relamp.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Wiring Box 19 537

Replacement Parts

Description	Part No
LED Module (3000K)	LED-0694/830
LED Module (4000K)	LED-0694/840
Driver (120V-277V)	75969-04
Diffuser	150478

Lamp: 70.4W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
