


BEGA

Photometric Filename: 50144.IES

TEST: LI_50144
TEST LAB: BEGA
DATE: 8/17/2016
LUMINAIRE: 50 144
LAMP: 70.4W LED

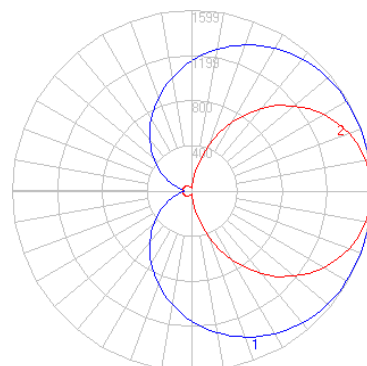


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	9670
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	121
Total Luminaire Watts	80
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Hor. Cylinder
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	6.67 ft
Luminous Height	0.17 ft (Diameter)

Zonal Lumen Summary

Zone	Lumens
0-10	109.54
10-20	317.69
20-30	494.97
30-40	625.37
40-50	700.04
50-60	717.39
60-70	685.10
70-80	622.11
80-90	562.82
90-100	562.82
100-110	622.11
110-120	685.10
120-130	717.39
130-140	700.04
140-150	625.37
150-160	494.97
160-170	317.69
170-180	109.54

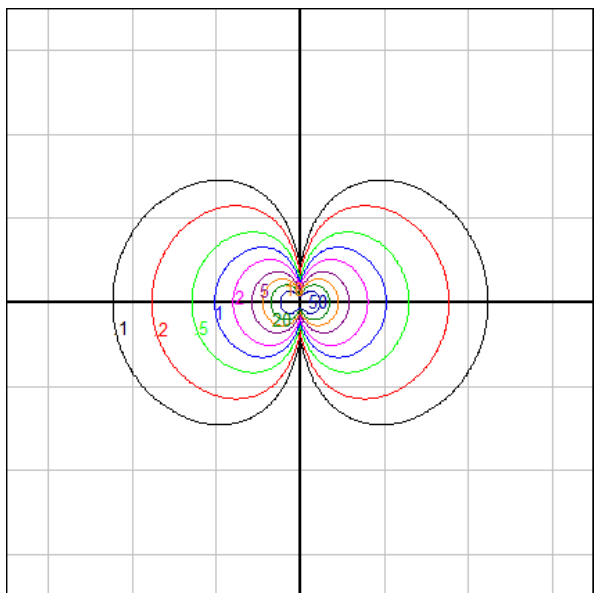

Wall Mount (Vertical) *Isofootcandle grid on wall
Grid Spacing = 10 ft.

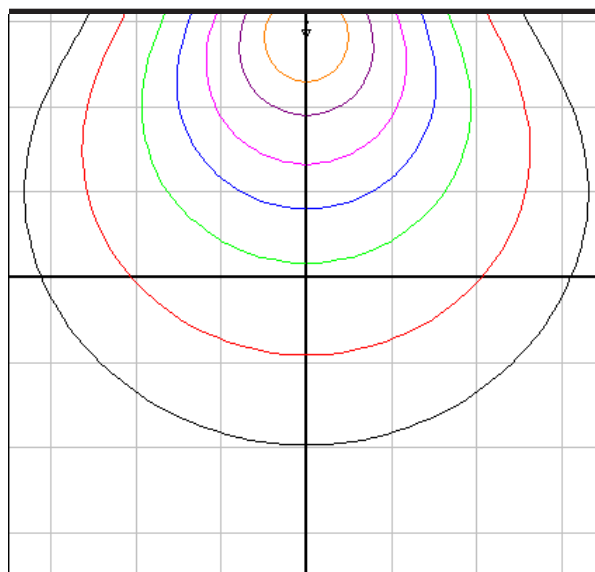

Wall Mount (Vertical) *Isofootcandle grid on floor
Mounting Height = 8 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2016

10/27/2016