


Tools Required:

Flat head screw driver medium
Phillips head screw driver medium
Torx T25

Dimensions

A: 24 "
B: 3-3/8 "
C: 3-3/4 "

Weight: 3.75 lbs.


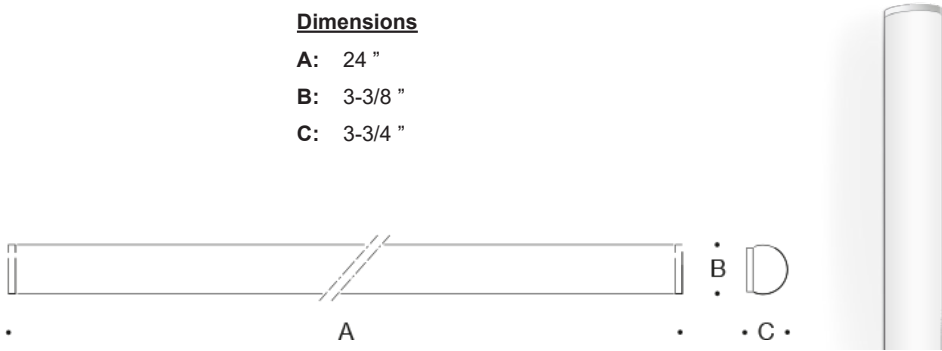


Notice to Installer for 50 215:

- 1. Rated for damp locations - for interior applications only.
- 2. Select the desired trim ring or housing material finish by using appropriate code number as suffix:
 - 50 215.1 - Brilliant White
 - 50 215.2 - Matte Aluminum
- 3. Luminaire mounting canopy mounts directly to finished surface over BEGA recessed 19 537 wiring box (provided).
- 4. LEDs are high quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

50 215 installation:

- 1. Undo lateral Torx T25 screw and remove end cap.
- 2. Remove diffuser and luminaire cover to expose luminaire base.
- 3. Route wires through luminaire base
- 4. Make supply wiring and luminaire wiring connections inside wiring box:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
 - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 5. Attach luminaire base to finished surface using appropriate hardware (by others)
- 6. Replace luminaire cover and diffuser, and tighten Torx T25 screw to secure.

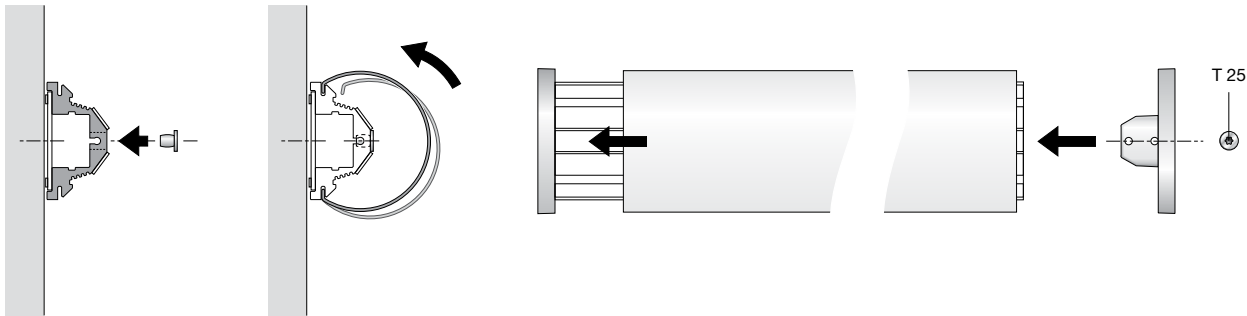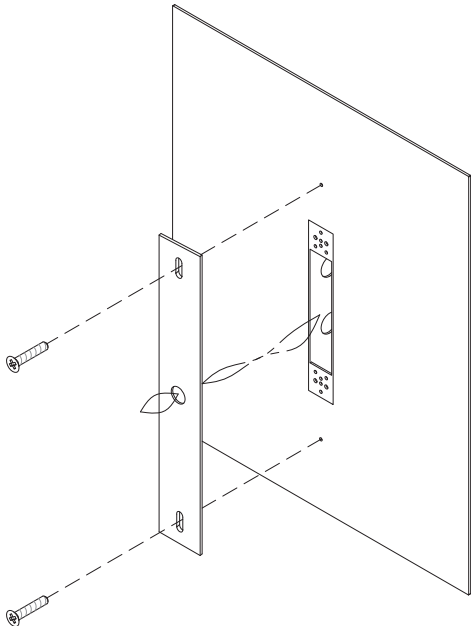

Relamping/Maintenance Clean glass and luminaire using only solvent-free cleansers.	Accessories Please refer to the appropriate accessory installation sheet for further instruction when applicable.	Replacement Parts	
		<u>Description</u>	<u>Part No</u>
Lamp: 17.6W LED	Small Opening Wiring Box 19 537	LED module (3000K)	LED-0627/930
		LED module (4000K)	LED-0627/940
		Driver (120V-277V)	76142-01
		Diffuser	150481.4

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
