


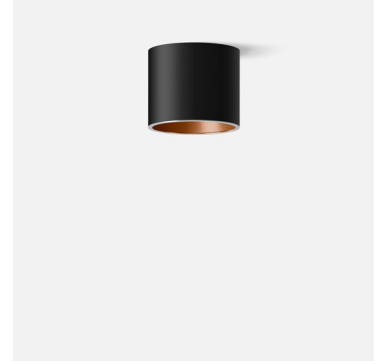
Tools Required:

- Flat head screwdriver medium
- Phillips head screwdriver medium

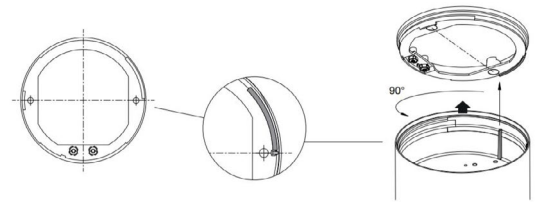
Overview:

LED Watts: 8.1W
 System Watts: 9.3W
 Controllability: 0-10V, TRIAC, and ELV dimmable
 Weight: 2.0 lbs.


Dimensions
A: 4 5/8"

B: 4 1/2"

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Select the desired trim ring or housing finish by using appropriate code number as suffix:
 50 674.2 – Velvet black · Matte aluminum
 50 674.4 – Velvet black · Matte brass
 50 674.6 – Velvet black · Matte copper
3. Mounts to the ceiling directly to a recessed standard 4" octagonal junction box using mounting kit (provided).
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

Figure 1: Remove mounting plate

Installation:

1. Twist top of luminaire housing that mounts to the ceiling counter-clockwise to remove mounting plate (Figure 1).
2. Mount the mounting kit bracket to the recessed standard 4" octagonal junction box.
3. Mount luminaire mounting plate to the mounting kit bracket using the studs and nuts provided with mounting kit.
4. Feed luminaire wires through back of luminaire housing.
5. Make supply wiring and luminaire wiring connections inside the junction box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 0-10V Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
6. Twist luminaire housing onto mounting plate and rotate 90° to lock in place.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dust and debris.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDE.

LES FILS D'ALIMENTATION 90°C MIN.