


BEGA

Photometric Filename: 55115.IES

TEST: BE_55115
TEST LAB: BEGA
DATE: 9/2/2017
LUMINAIRE: 55 115
LAMP: 3W LED

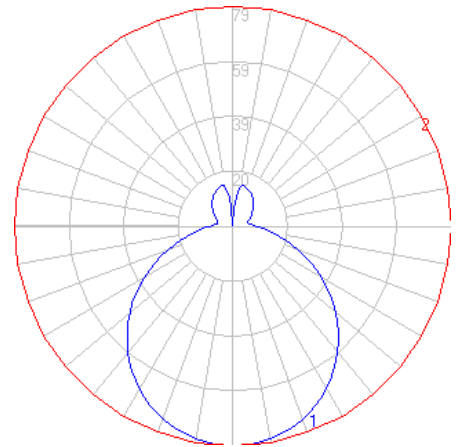


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	300
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	75
Total Luminaire Watts	4
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.79 ft (Diameter)
Luminous Height	0.18 ft

Zonal Lumen Summary

Zone	Lumens
0-10	7.46
10-20	21.43
20-30	32.65
30-40	39.69
40-50	41.59
50-60	38.25
60-70	30.65
70-80	20.91
80-90	12.22
90-100	7.27
100-110	6.04
110-120	6.67
120-130	7.70
130-140	8.19
140-150	7.82
150-160	6.48
160-170	4.22
170-180	0.83

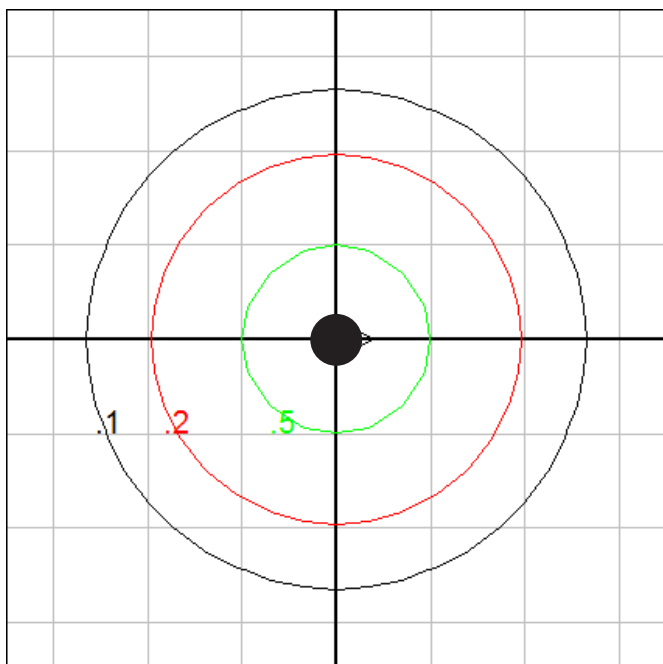

Ceiling Mount - Isofootcandle Grid on Floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

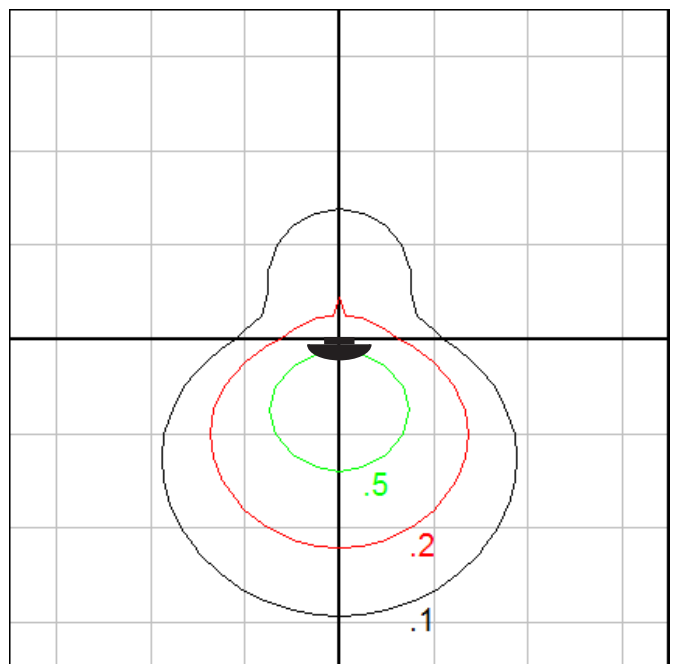

Wall Mount - Isofootcandle Grid on Floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

5/14/2018