


BEGA

Photometric Filename: 55116.IES

TEST: BE_55116
TEST LAB: BEGA
DATE: 3/18/2013
LUMINAIRE: 55 116
LAMP: 8.4W LED

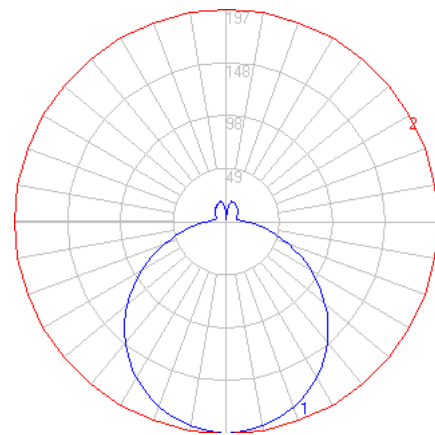


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	688
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	10
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.92 ft (Diameter)
Luminous Height	0.23 ft

Zonal Lumen Summary

Zone	Lumens
0-10	18.55
10-20	53.21
20-30	81.04
30-40	98.37
40-50	102.96
50-60	94.47
60-70	75.20
70-80	50.55
80-90	28.69
90-100	15.38
100-110	10.70
110-120	10.61
120-130	11.46
130-140	11.51
140-150	10.44
150-160	8.53
160-170	5.41
170-180	1.13

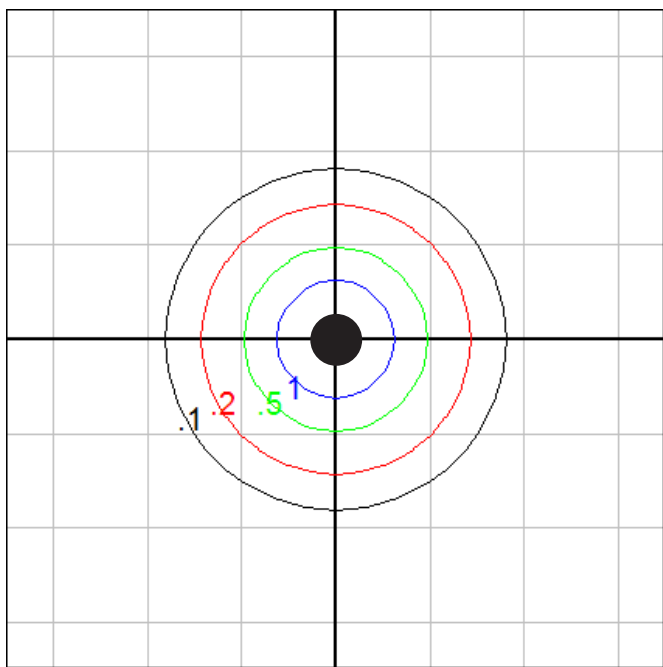

Ceiling Mount - Isofootcandle Grid on Floor
Mounting Height = 10 ft. Grid Spacing = 10 ft.

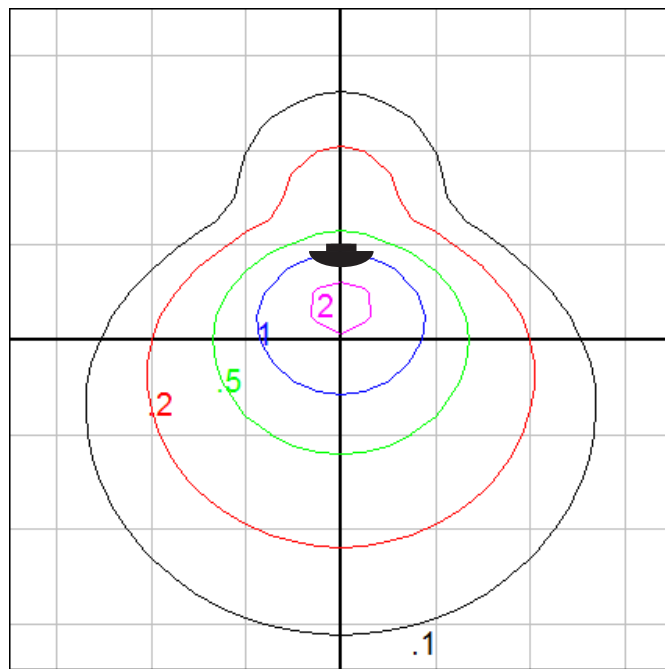

Wall Mount - Isofootcandle Grid on Floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

5/14/2018