


Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium

Weight: 9.26 lbs.

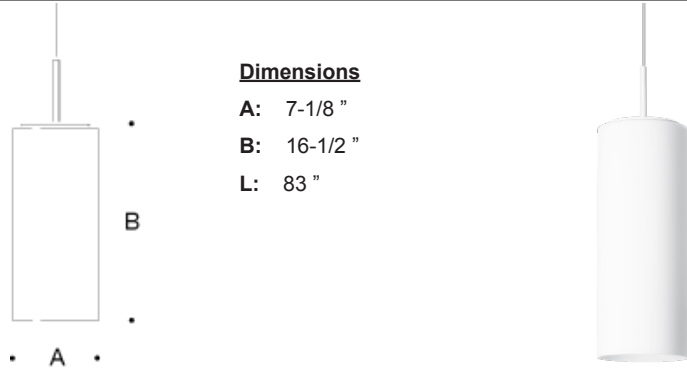

**Dimensions**  
A: 7-1/8 "  
B: 16-1/2 "  
L: 83 "


Notice to Installer for 56 608:

- See page 2 for specific product safety warnings.
- Select the desired housing material finish by using appropriate code number as suffix.
  - 56 608.1 - White
  - 56 608.3 - Chrome
- Mounts directly to standard recessed 4" octagonal wiring box (by others).
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

56 608 - installation:

- Undo set screw on canopy cover and lower canopy cover from canopy baseplate.
- Undo two set screws on canopy strain relief, adjust luminaire cable to desired length, and re-tighten two set screws.
- Feed driver wires through canopy baseplate.
- Make supply wiring and driver wiring connections inside the wiring box (by others):
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
  - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
- Move canopy cover up to the ceiling/canopy baseplate and tighten set screw on canopy cover to secure.

Figure 1: Mounting Canopy (Generic Image)

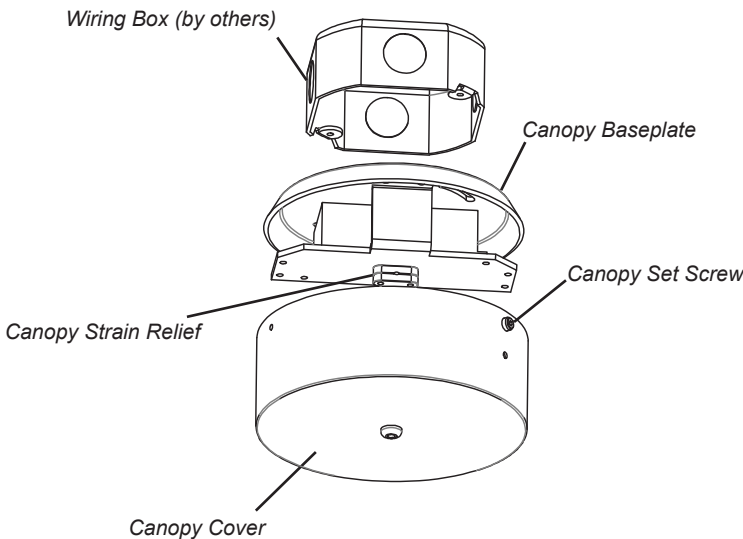

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	113148.0
LED driver (120-277V)	75985-11
LED module (3000K)	LED-0611/930
LED module (4000K)	LED-0611/940

Lamp: 28.2W LED

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---