


Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium

Weight: 13.23 lbs.

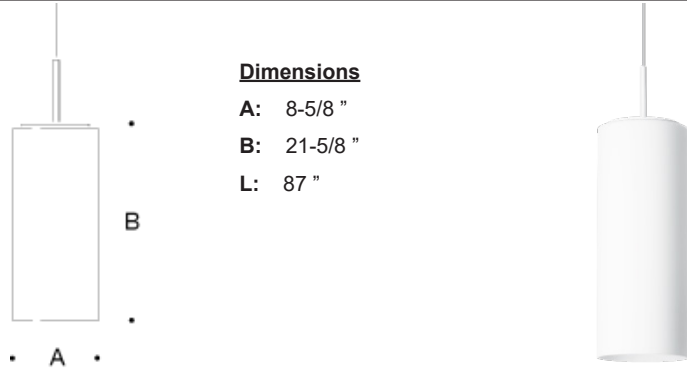

Dimensions
A: 8-5/8 "
B: 21-5/8 "
L: 87 "


Notice to Installer for 56 609:

- 1. See page 2 for specific product safety warnings.
- 2. Select the desired housing material finish by using appropriate code number as suffix.
 - 56 609.1 - White
 - 56 609.3 - Chrome
- 3. Mounts directly to standard recessed 4" octagonal wiring box (by others).
- 4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

56 609 - installation:

- 1. Undo set screw on canopy cover and lower canopy cover from canopy baseplate.
- 2. Shorten steel aircraft cable and luminaire cable (if desired) by loosening screws of the steel wire fasteners, shorten wire as required and refix fasteners. Power cable and steel wire can only be shortened on the canopy end.
- 3. Feed driver wires through canopy baseplate.
- 4. Make supply wiring and driver wiring connections inside the wiring box (by others):
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
 - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 5. Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
- 6. Move canopy cover up to the ceiling/canopy baseplate and tighten set screw on canopy cover to secure.

Figure 1: Mounting Canopy (Generic Image)

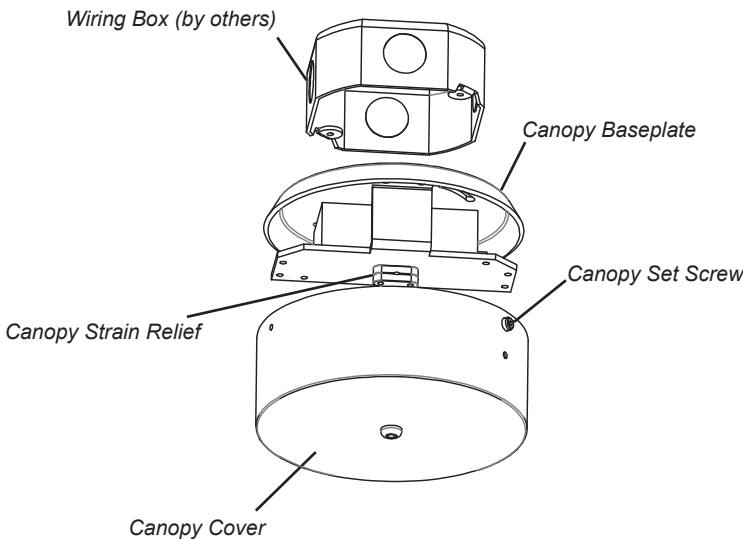

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	113161.0
LED driver (120-277V)	76084-1050
LED module (3000K)	LED-0694/930
LED module (4000K)	LED-0694/940

Lamp: 52.8W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
