


BEGA

Photometric Filename: 66160.IES

TEST: BE_66160
TEST LAB: BEGA
DATE: 10/22/2015
LUMINAIRE: 66 160
LAMP: 33.6W LED

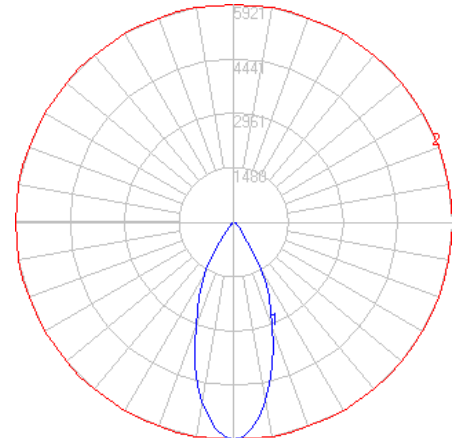


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3423
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	86
Total Luminaire Watts	40
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.66
Spacing Criterion (90-270)	0.66
Spacing Criterion (Diagonal)	0.74
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.48 ft
Luminous Width (90-270)	0.48 ft
Luminous Height	0.00 ft

Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	5921.3
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	40.8
Vertical Beam Angle (50%)	40.8
Horizontal Field Angle (10%)	71.2
Vertical Field Angle (10%)	71.2
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1634
Beam Efficiency	N.A.
Field Lumens	3186
Field Efficiency	N.A.
Spill Lumens	244
Luminaire Lumens	3430
Total Efficiency	N.A.
Total Luminaire Watts	40

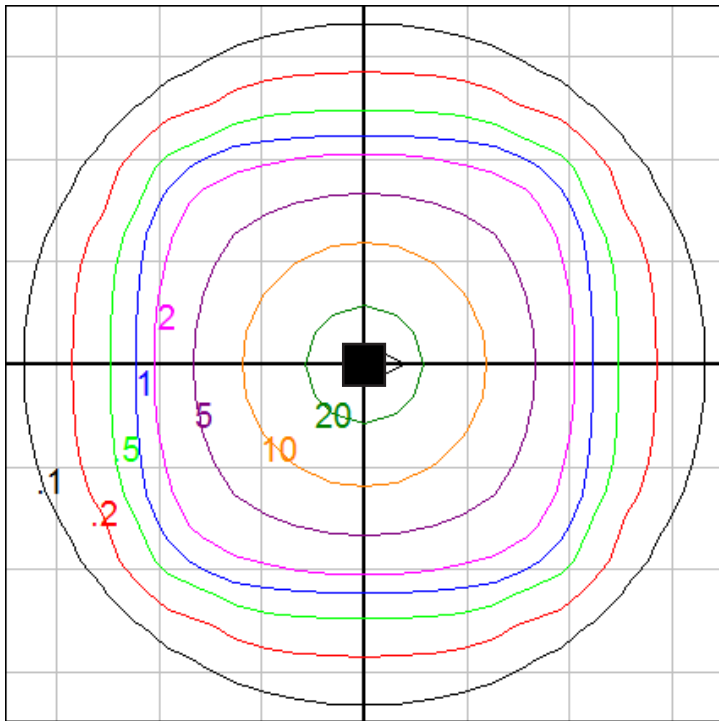

Mounting Height = 15 ft. Grid Spacing = 5 ft.

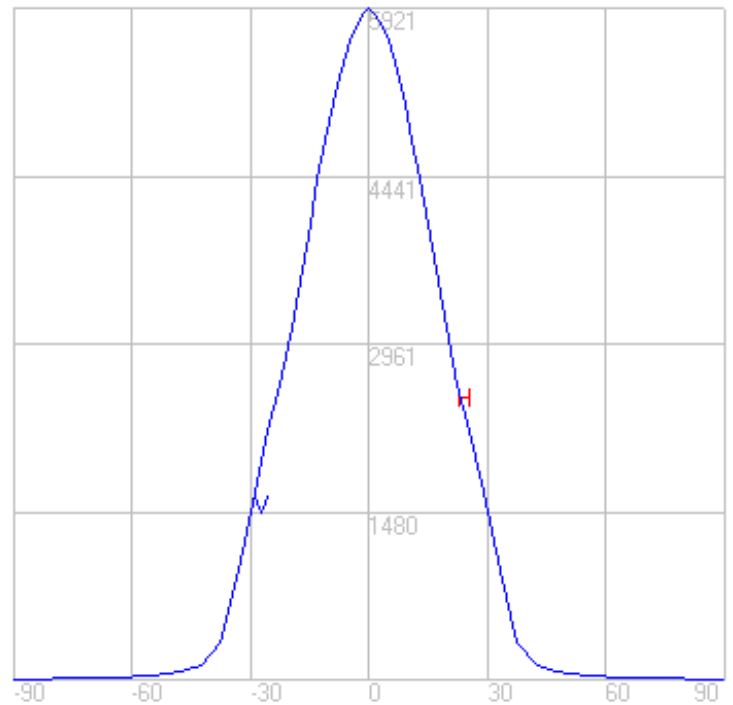

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

6/4/2018