


BEGA

Photometric Filename: 66519.IES

TEST: BE_66519
TEST LAB: BEGA
DATE: 11/7/2016
LUMINAIRE: 66 519
LAMP: 25W LED

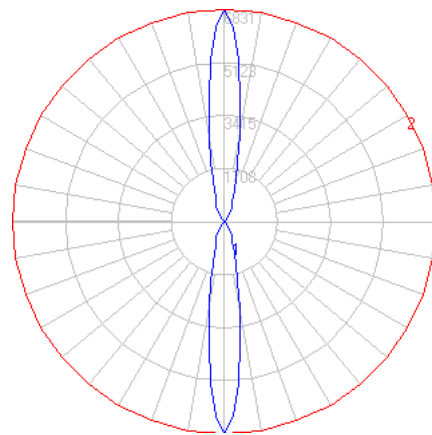


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2465
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	85
Total Luminaire Watts	29
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.40 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	417.93
10-20	415.89
20-30	283.30
30-40	101.65
40-50	7.13
50-60	3.46
60-70	1.33
70-80	0.91
80-90	0.86
90-100	0.86
100-110	0.91
110-120	1.33
120-130	3.46
130-140	7.13
140-150	101.65
150-160	283.30
160-170	415.89
170-180	417.93

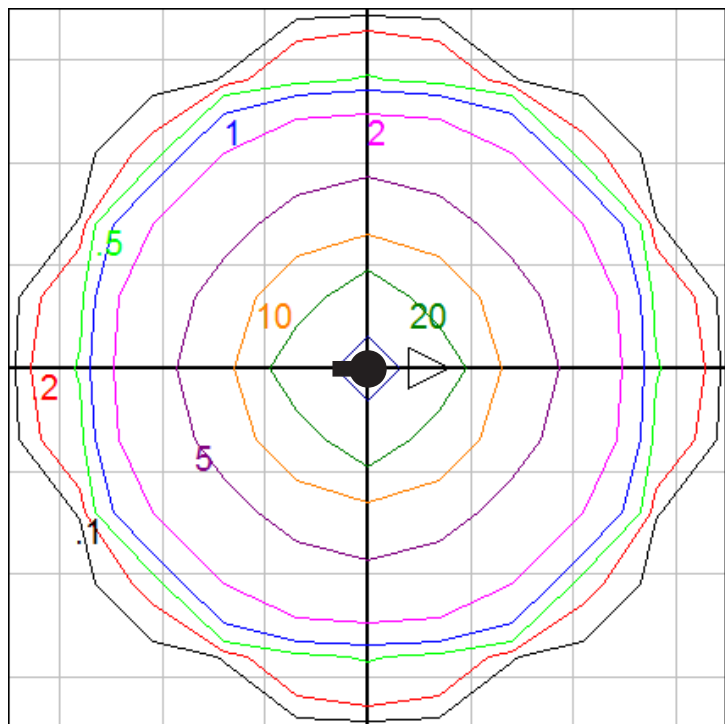

Wall Mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 2.5 ft.

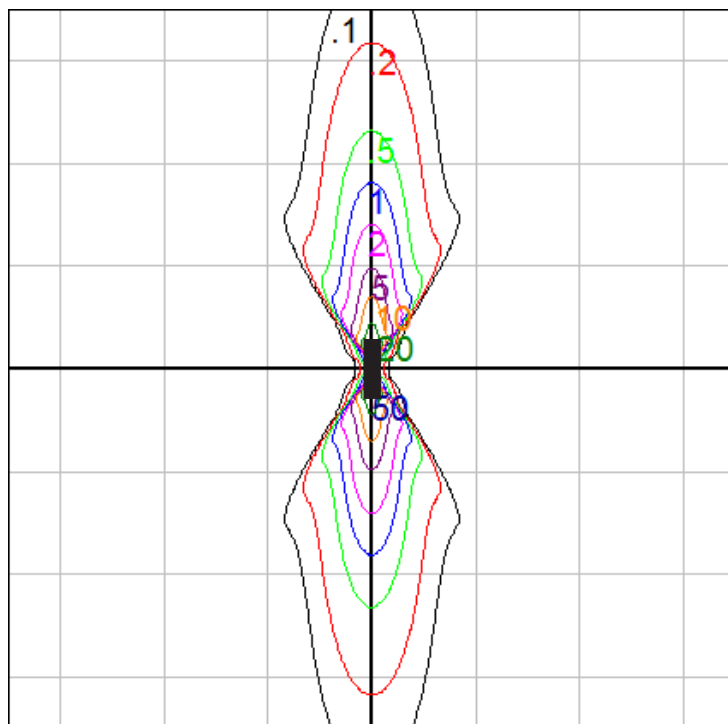

Wall Mount - Isofootcandle grid on wall
Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.