


BEGA

Photometric Filename: 66972.IES

TEST: BE_66972
 TEST LAB: 66 972
 DATE: 11/27/2017
 LUMINAIRE: 66 972
 LAMP: 4.9W LED, 24V DC

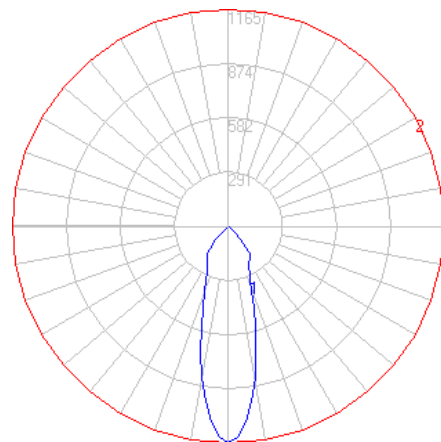


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	1164.7
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	29.3
Vertical Beam Angle (50%)	29.3
Horizontal Field Angle (10%)	83.1
Vertical Field Angle (10%)	83.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	174
Beam Efficiency	N.A.
Field Lumens	516
Field Efficiency	N.A.
Spill Lumens	32
Luminaire Lumens	548
Total Efficiency	N.A.
Total Luminaire Watts	7
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	93.61
10-20	157.32
20-30	128.42
30-40	122.66
40-50	44.69
50-60	0.23
60-70	0.15
70-80	0.20
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

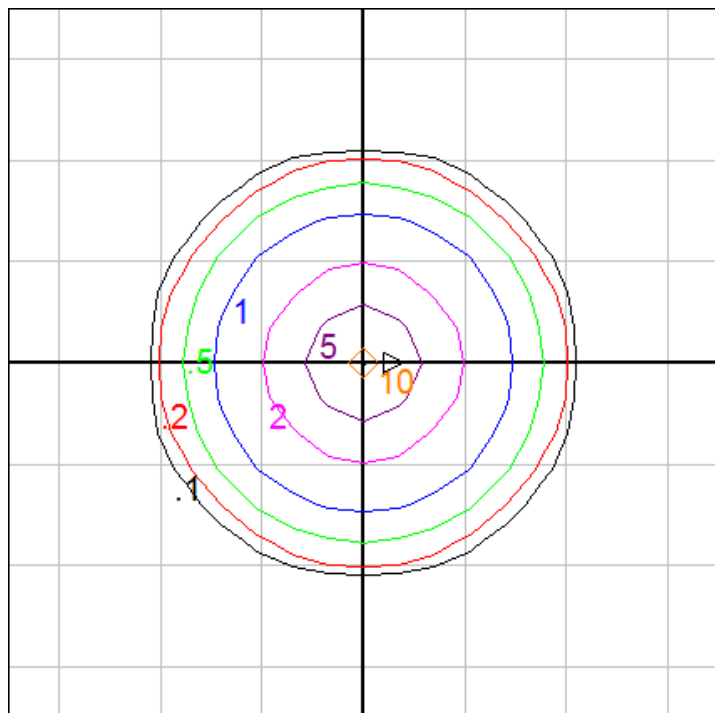

Mounting Height = 10 ft. Grid Spacing = 5 ft.

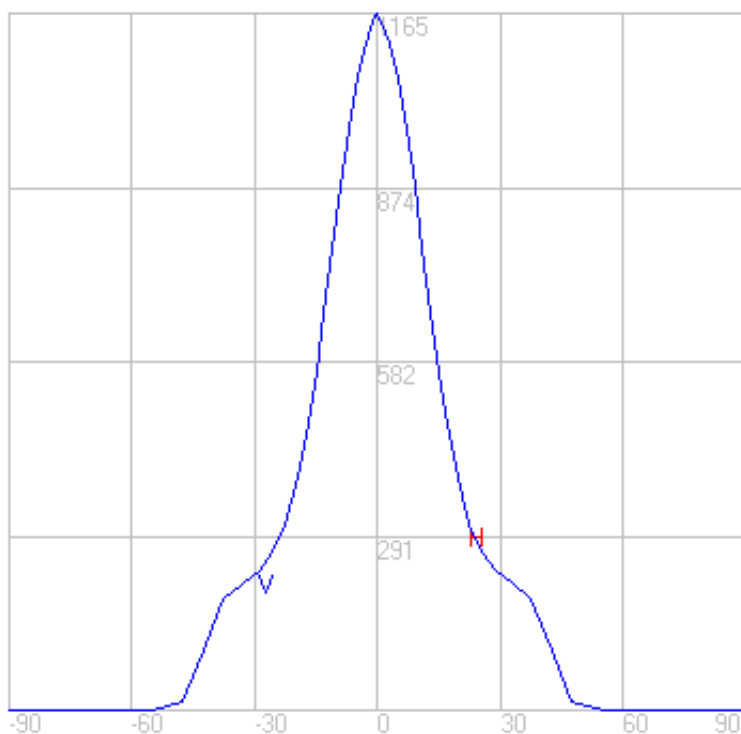

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

11/27/2017