


BEGA

Photometric Filename: 66976.IES

TEST: BE_66976
TEST LAB: BEGA
DATE: 8/21/2017
LUMINAIRE: 66 976
LAMP: 4.9W LED

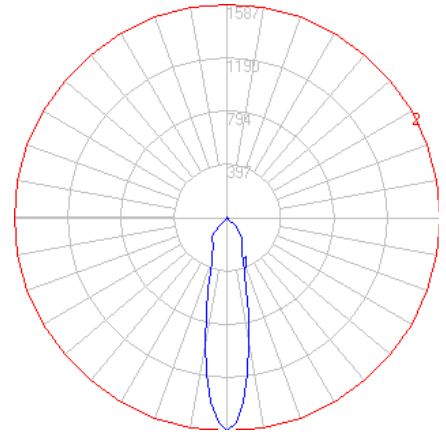


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	1587.1
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	23.5
Vertical Beam Angle (50%)	23.5
Horizontal Field Angle (10%)	77.5
Vertical Field Angle (10%)	77.5
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	148
Beam Efficiency	N.A.
Field Lumens	499
Field Efficiency	N.A.
Spill Lumens	58
Luminaire Lumens	557
Total Efficiency	N.A.
Total Luminaire Watts	7
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	117.79
10-20	158.00
20-30	120.72
30-40	119.40
40-50	35.91
50-60	2.50
60-70	1.43
70-80	0.99
80-90	0.19
90-100	0.15
100-110	0.04
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

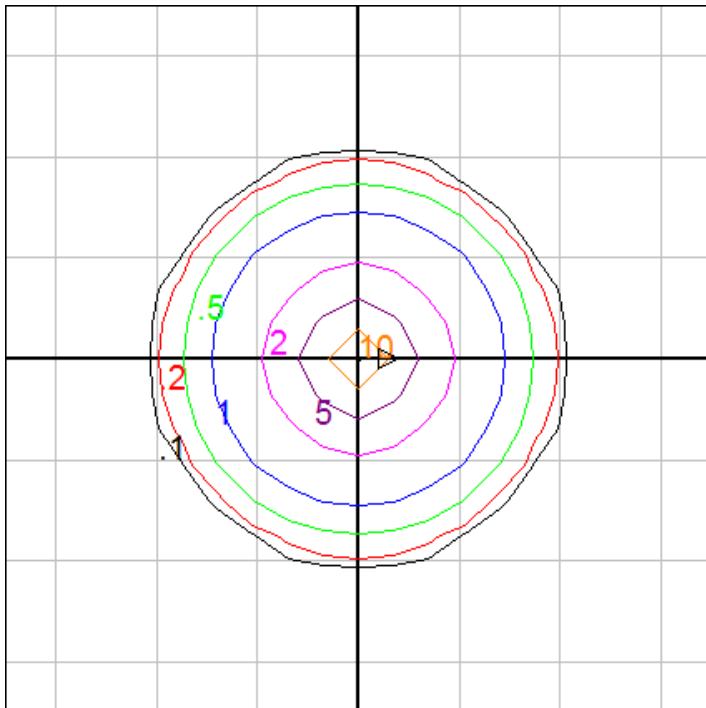

Mounting Height = 10 ft. Grid Spacing = 5 ft.

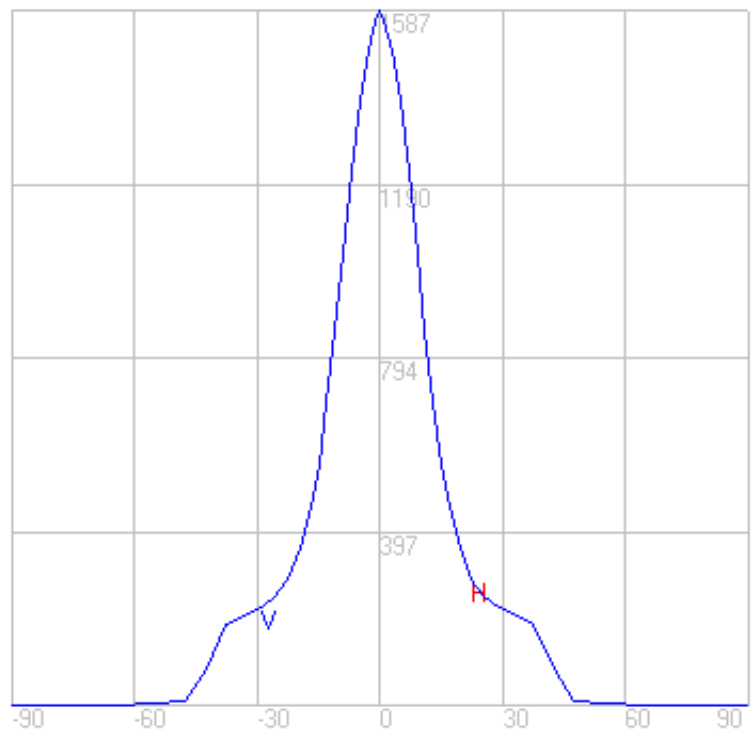

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

11/27/2017