



Tools Required:

3mm hex key



Dimensions

- A:** 8 5/8 "
- B:** 3/4 "



Notice to Installer for 71 125:


- 1. See page 2 for specific product safety warnings.

NOTE: For proper installation, an accompanying system bollard tube must be selected with the bollard head.

71 124 installation:

- 1. Install bollard tube per bollard tube installation instructions, including anchorage and supply wiring connections.
- 2. Insert bollard head into bollard tube by aligning pins.
- 3. Secure bollard head by tightening (2) 6mm hex set screw.

Figure 1

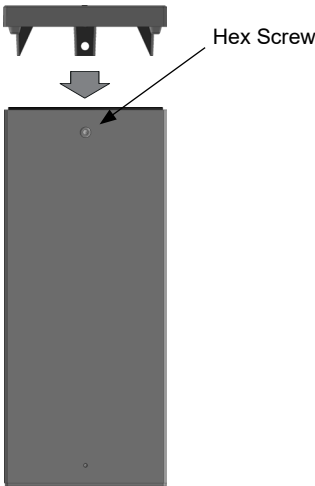

Relamping/Maintenance
No relamping required.

Bollard Tube Options
Please refer to bollard head specification sheet for a complete list of compatible bollard tube options.

Replacement Parts
Description Part No

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
