

Application

Factory sealed recessed wall luminaire with symmetric floodlight optics, designed to be installed in walls or other vertical or horizontal surfaces for both interior and exterior locations.

Materials

- Clear safety glass with optical texture
- Corrosion-resistant 304 grade stainless steel
- Stainless steel screw clamps
- Aluminum installation housing
- Pure anodized aluminum reflector

NRTL listed to North American Standards, suitable for wet locations  
Protection class IP 67

Weight: 12.8lbs.

Electrical

- Operating voltage24VDC (remote power supply req.)
- Minimum start temperature-40° C
- LED module wattage9.7 W
- System wattage13.0 W
- ControllabilityNon-Dimming
- Color rendering indexRa > 80
- Luminaire lumens729lm
- LED service life (L70)60000 hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

#4 brushed stainless steel. Custom colors are not available.

Type:

BEGA Product:

Project:

Modified:


Available accessories

- B19580 Remote driver box · Static white
- B19591 Remote driver box · Static white

See individual accessory spec sheet for details.

Included (available for pre-shipment)

- BB7002LED Installation housing

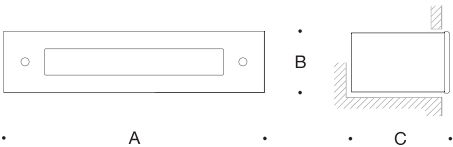

Recessed wall luminaire · Symmetric · 24V DC				
	LED	A	B	C
B77012	9.7 W	39 <sup>3</sup> / <sub>8</sub>	2 <sup>1</sup> / <sub>8</sub>	3 <sup>7</sup> / <sub>8</sub>

