


BEGA

Photometric Filename: 77017.ies

TEST: BE_77017
TEST LAB: BEGA
DATE: 5/2/2017
LUMINAIRE: 77 017
LAMP: 1.2W LED, 24VDC

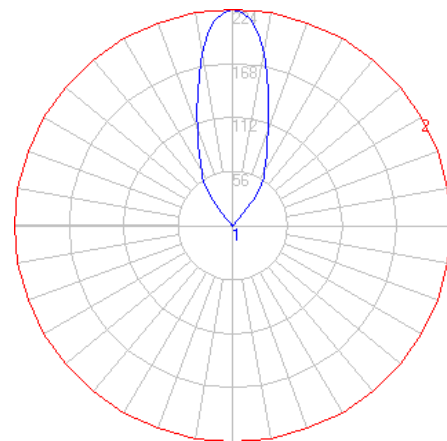


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	224.1
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	38.1
Vertical Beam Angle (50%)	38.1
Horizontal Field Angle (10%)	79.8
Vertical Field Angle (10%)	79.8
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	55
Beam Efficiency	N.A.
Field Lumens	122
Field Efficiency	N.A.
Spill Lumens	11
Luminaire Lumens	134
Total Efficiency	N.A.
Total Luminaire Watts	2
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	0.12
100-110	0.53
110-120	0.96
120-130	1.60
130-140	5.63
140-150	28.27
150-160	37.67
160-170	39.13
170-180	19.41

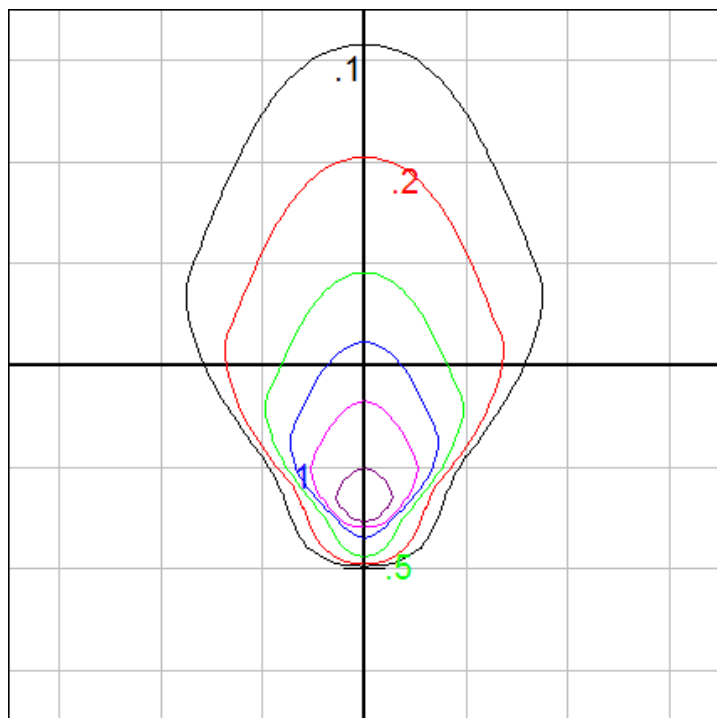

In-Ground Fixture - Isofootcandle Grid on Wall
Fixture Setback = 1 ft. Grid Spacing = 2.5 ft.

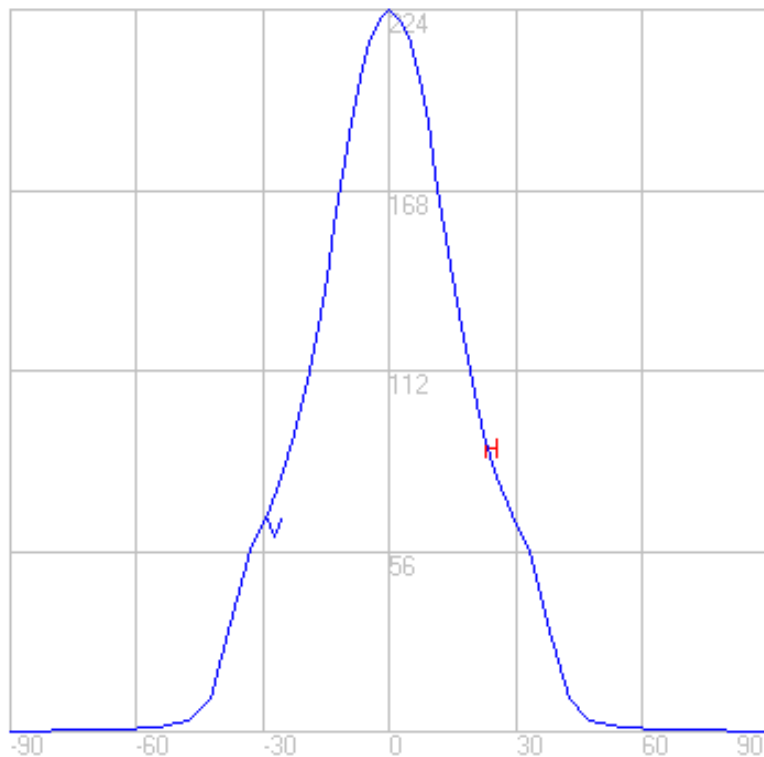

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

3/28/2018