


Tools Required:

- M4 Torx key
- Flathead screwdriver, small

Protection Class: IP68

Weight: 3.1 lbs.

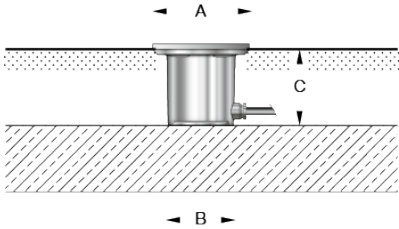

Dimensions

- A: 4-5/8"
- B: 3-1/8"
- C: 3-7/8"





Notice to Installer for 77 019:

- See page 2 for specific product safety warnings.
- Fixture is pre-wired with two 10' lengths of #12 AWG wires and a waterproof cable gland entry into housing. DO NOT DISTURB THE SEAL.
- This in-ground luminaire must be supplied by a UL Listed Class 2 remote 24V DC power supply.
- The fixtures are wet location rated, not submersible, they should not be installed in "low" points of concrete or earth installations where they are going to be submerged underwater for an extended period of time.
- A level surface MUST be provided for proper installation.
- Lamp supplied with luminaire.
- WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.  
**NOTE:** BEGA Fixtures may be damaged if connected to a conduit system that contains water. Article 300-5G of the National Electric Code requires that "conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at both ends".
- Requires a 24V DC class 2 electronic power supply to operate intended LED wattage.

77 019 Installation:

- The luminaire housing must be firmly mounted to a proper foundation. The top edge of the luminaire housing must be flush to the prepared floor. Failure to do so may result in the fixture not sealing properly and void the warranty.
- Anchor the fixture to a foundation suitable for the intended vehicular or pedestrian loads.  
**NOTE: MAKE SURE TO ALIGN THE FIXTURE HOUSING SO THE TRIM WILL BE ORIENTED AS PER DESIGN SPECS.**
- Connect the fixture to 1/2" plastic or steel conduit. Pull the provided 10' of wire through the conduit and thread conduit into provided brass adapter. DO NOT DISTURB THE FACTORY SEAL OF THE CONDUIT CONNECTOR. Use a suitable thread sealer on the 1/2" NPS conduit entry.
- Finish the floor work.

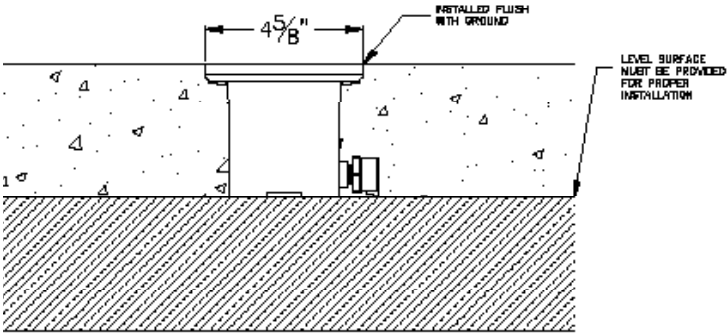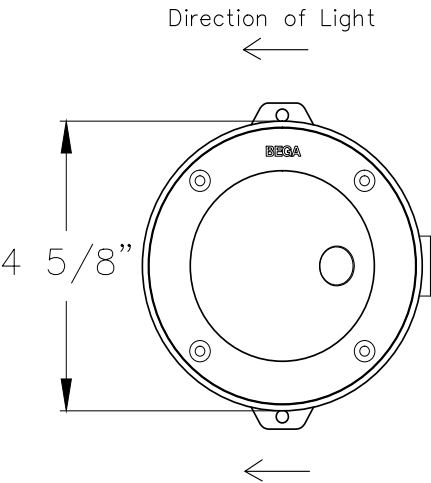

Relamping/Maintenance  
No relamping required.

Lamp: 3W LED, 24V DC

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

- Remote 25W LED Driver and box 19 580
- Remote 50W LED Driver and box 19 591

Replacement Parts

Description	Part No
Glass	140918
Gasket	83001786
LED Module (3000K)	LED-0291/830
LED Module (4000K)	LED-0291/840
Driver	75928

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---