


BEGA

Photometric Filename: 77066.IES

TEST: N/A
TEST LAB: BEGA
DATE: 1/16/2013
LUMINAIRE: 77 066
LAMP: 6.5W LED




Characteristics


NEMA Type	4 H x 4 V
Maximum Candela	527.5
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	33.0
Vertical Beam Angle (50%)	33.0
Horizontal Field Angle (10%)	62.0
Vertical Field Angle (10%)	62.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	97
Beam Efficiency	N.A.
Field Lumens	192
Field Efficiency	N.A.
Spill Lumens	19
Luminaire Lumens	211
Total Efficiency	N.A.
Total Luminaire Watts	9
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.08
130-140	3.09
140-150	14.79
150-160	68.61
160-170	80.88
170-180	43.23

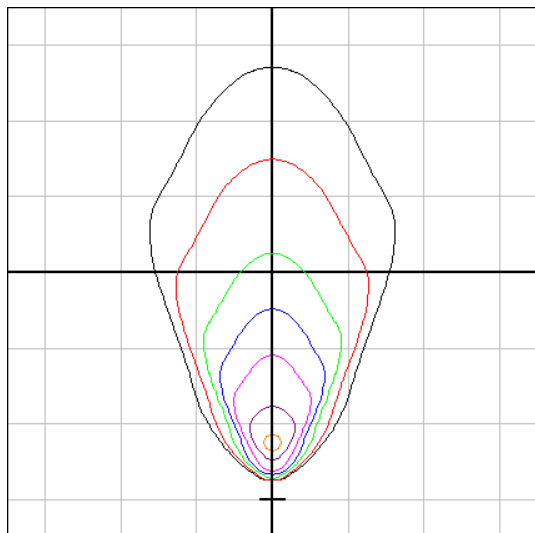

Setback= 1 ft. Grid Spacing = 3 ft.
NOTE: Iso-template shows distribution on wall

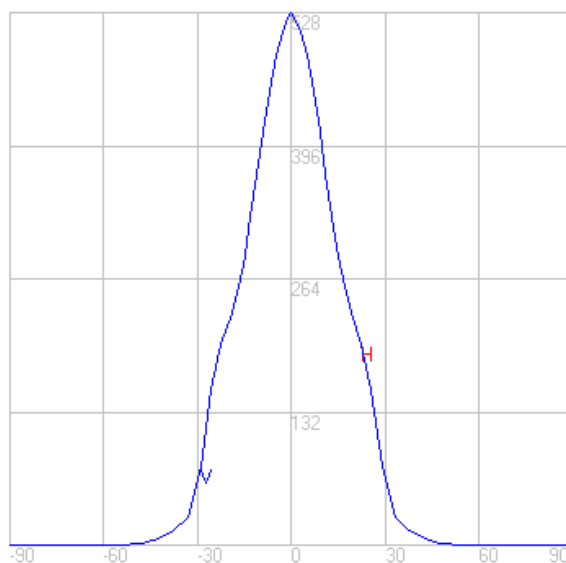

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

12/13/2017