


BEGA

Photometric Filename: 77127.ies

TEST: BE_77127
TEST LAB: BEGA
DATE: 3/19/2013
LUMINAIRE: 77 127
LAMP: 0.6W LED

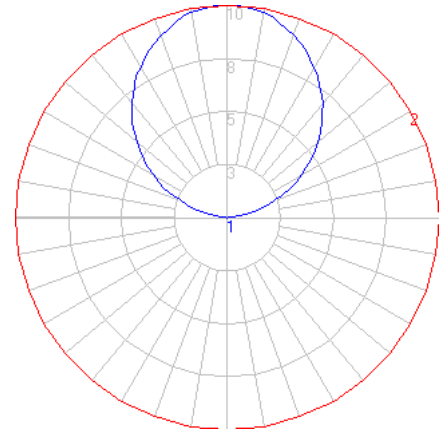


Characteristics


NEMA Type	7 H x 7 V
Maximum Candela	10.4
Maximum Candela Angle	-5 H -3 V
Horizontal Beam Angle (50%)	107.5
Vertical Beam Angle (50%)	107.5
Horizontal Field Angle (10%)	159.4
Vertical Field Angle (10%)	159.4
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	20
Beam Efficiency	N.A.
Field Lumens	27
Field Efficiency	N.A.
Spill Lumens	1
Luminaire Lumens	28
Total Efficiency	N.A.
Total Luminaire Watts	1
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.00
90-100	0.39
100-110	1.79
110-120	3.33
120-130	4.47
130-140	5.07
140-150	4.96
150-160	4.18
160-170	2.79
170-180	0.98

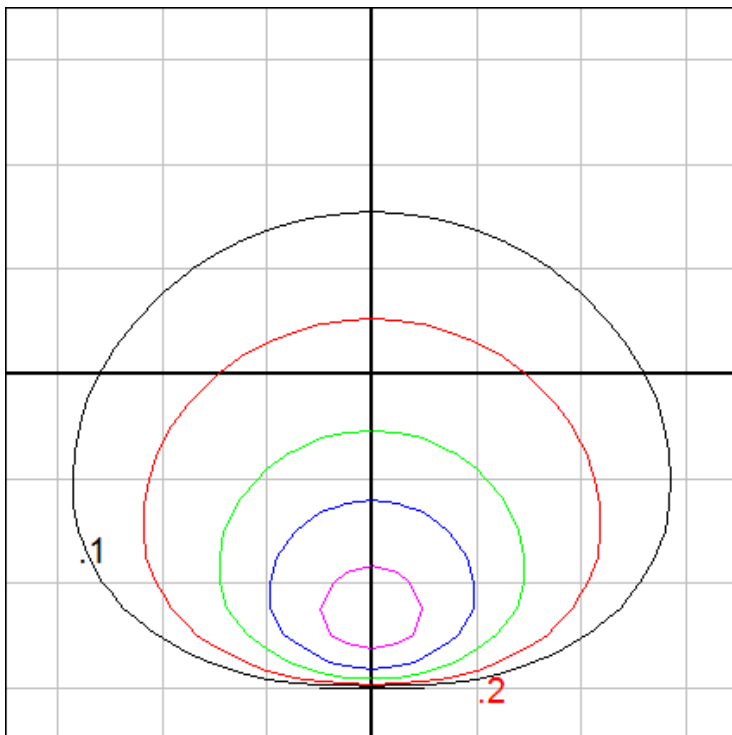

Iso-footcandle grid on wall
Setback = 1 ft. Grid Spacing = 1 ft.

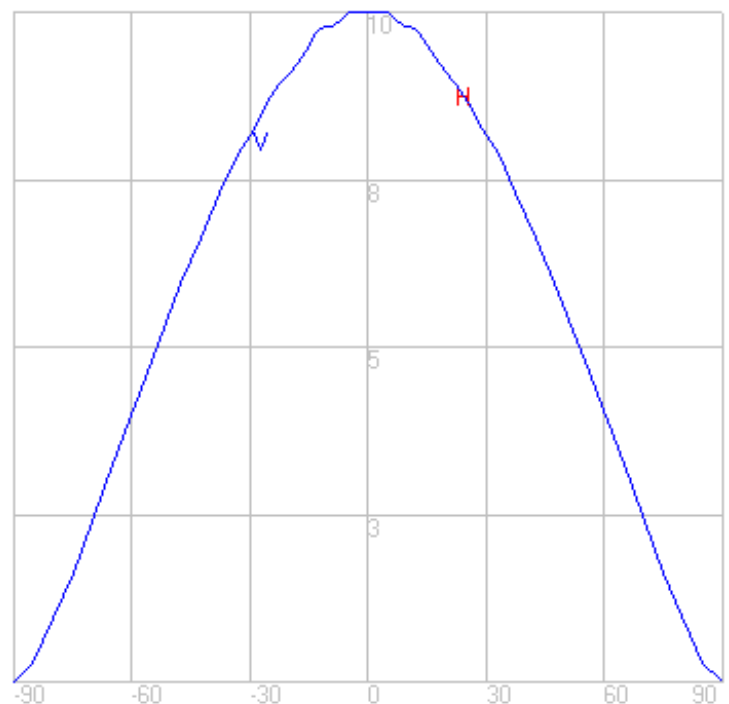

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.