


BEGA

Photometric Filename: 77486.ies


TEST: BE_77486
TEST LAB: BEGA
DATE: 2/11/2013
LUMINAIRE: 77 486
LAMP: 37.9W LED

All results in accordance with IESNA LM-79-08




Characteristics

NEMA Type	7 H x 6 V
Maximum Candela	1985.6
Maximum Candela Angle	-13 H 0 V
Horizontal Beam Angle (50%)	95.3
Vertical Beam Angle (50%)	78.2
Horizontal Field Angle (10%)	135.8
Vertical Field Angle (10%)	117.2
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	2591
Beam Efficiency	N.A.
Field Lumens	3537
Field Efficiency	N.A.
Spill Lumens	157
Luminaire Lumens	3694
Total Efficiency	N.A.
Total Luminaire Watts	43
Ballast Factor	1.00

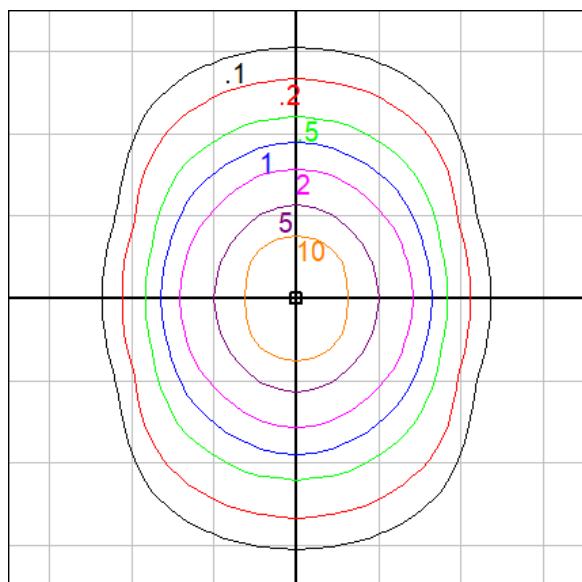

Mounting Height = 10 ft. Grid Spacing = 8 ft.

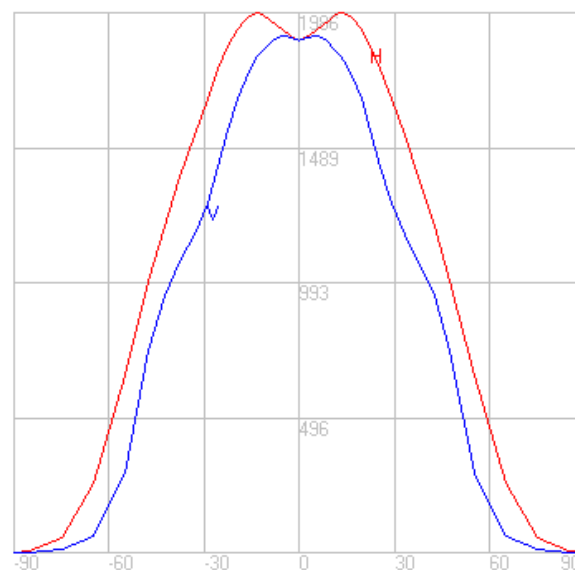

Axial Display

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/3/2018