
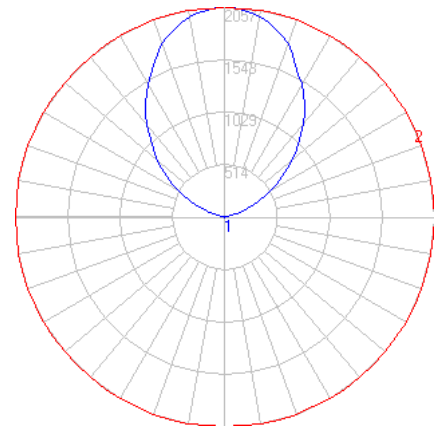


BEGA

Photometric Filename: 77635.IES

TEST: BE_77635
TEST LAB: BEGA
DATE: 11/28/2017
LUMINAIRE: 77 635
LAMP: 20W LED




Characteristics


NEMA Type	7 H x 4 V
Maximum Candela	2057.13
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	89.4
Vertical Beam Angle (50%)	25.4
Horizontal Field Angle (10%)	142.9
Vertical Field Angle (10%)	58.5
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	782
Beam Efficiency	N.A.
Field Lumens	1508
Field Efficiency	N.A.
Spill Lumens	62
Luminaire Lumens	1569
Total Efficiency	N.A.
Total Luminaire Watts	25
Ballast Factor	1.00

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.02
60-70	0.09
70-80	0.10
80-90	0.08
90-100	0.47
100-110	10.83
110-120	46.75
120-130	107.18
130-140	185.12
140-150	285.11
150-160	394.83
160-170	364.66
170-180	177.44

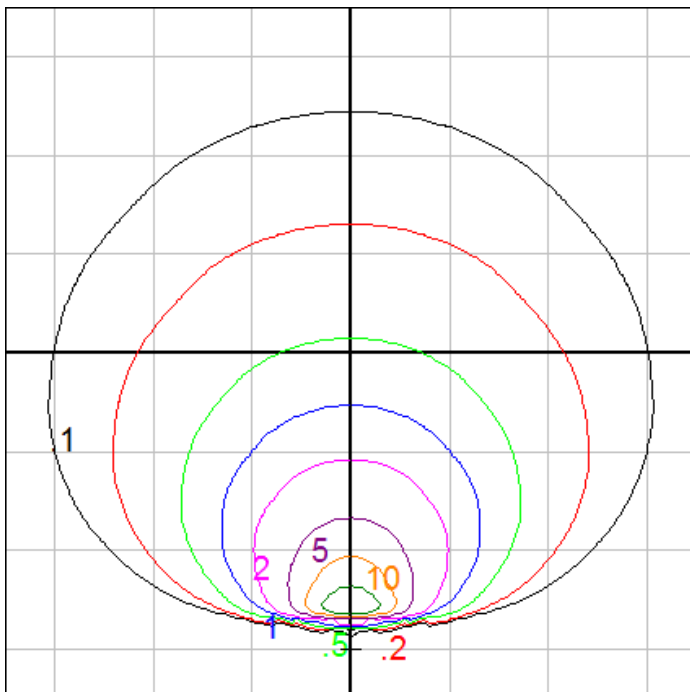

In-Grade Fixture - Isogrid on wall
Fixture Setback = 1 ft. Grid Spacing = 5 ft.

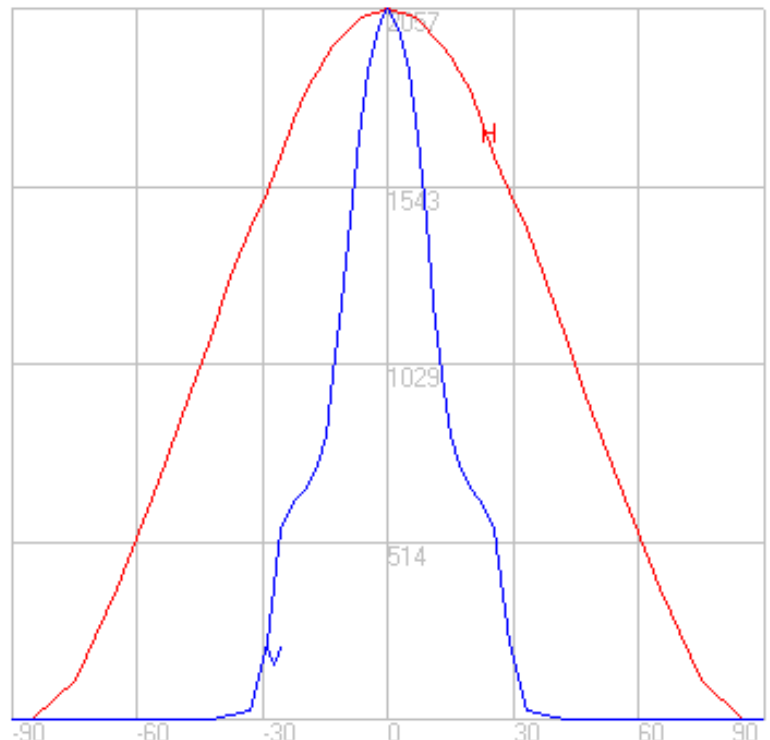

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

11/28/2017