


BEGA

Photometric Filename: 77705.ies


TEST: N/A
TEST LAB: BEGA
DATE: 9/24/2015
LUMINAIRE: 77 705
LAMP: 19.2W LED

All results in accordance with IESNA LM-63-95




Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	2766.7
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	43.5
Vertical Beam Angle (50%)	43.5
Horizontal Field Angle (10%)	80.6
Vertical Field Angle (10%)	80.6
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	914
Beam Efficiency	N.A.
Field Lumens	1709
Field Efficiency	N.A.
Spill Lumens	73
Luminaire Lumens	1782
Total Efficiency	N.A.
Total Luminaire Watts	23
Ballast Factor	1.00

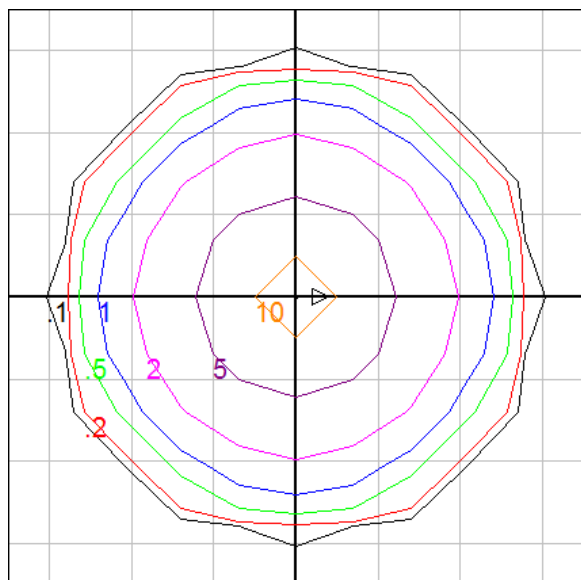

Setback = 15 ft. Grid Spacing = 5 ft.

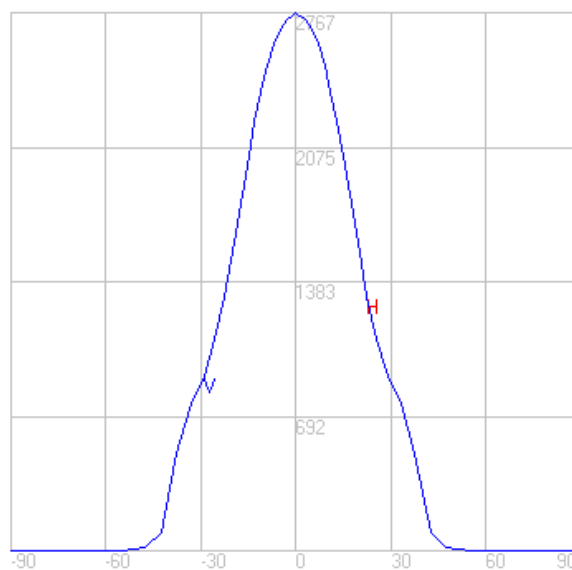

Axial Display

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

4/13/2017