


**Tools Required:**

4mm hex key  
5mm hex key  
Flat head screw driver medium  
Phillips head screw driver medium


**Dimensions**

**A:** 5-1/2 "  
**B:** 27-1/2 "  
**C:** 5-1/2 "  
**D:** 7-1/2 x 3-1/2 "


**Protection Class:** IP65


**Weight:** 6.2 lbs

**Notice to Installer for 77 757:**

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Mounts directly to wall over a standard vertical single gang wiring box (by others).
3. Ceiling and wall applications only.
4. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
5. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

**77 757 - installation:**

1. Loosen the (4) 4mm hex screw on the luminaire canopy and remove luminaire base from luminaire.
2. Feed luminaire wiring through the luminaire base and mounting plate.
3. Make supply wiring and luminaire wiring connections inside the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Mount luminaire to ceiling or wall using hardware (by others). Minimum size: 8-32 screws
5. Replace luminaire canopy (with luminaire attached) and tighten (4) 4mm screws.
8. To adjust head angle, use 5mm hex key to loosen adjustment screw. Adjust luminaire head as needed and tighten adjustment screw.

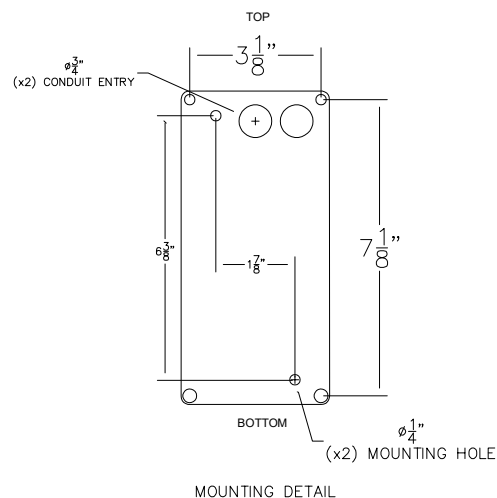
**Relamping/Maintenance**

No relamping necessary.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Lamp:** 19.6W LED

180° Glare Shield  
Elliptical Spread Lens

70 756  
70 055

**Replacement Parts**

Description	Part No
Diffuser	140851
Gasket	831279
LED driver (120V-277V)	75940
LED module (2700K)	LED-0328/827
LED module (3000K)	LED-0328/830
LED module (3500K)	LED-0328/835
LED module (4000K)	LED-0328/840