


BEGA

Photometric Filename: 77853.IES

TEST: N/A
 TEST LAB: BEGA
 DATE: 02/26/2014
 LUMINAIRE: 77 853
 LAMP: 38W LED

All results in accordance with IESNA LM-63-1995

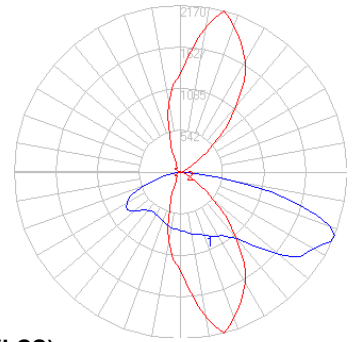


Characteristics

IES Classification	Type III
Longitudinal Classification	Medium
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3464
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	77
Total Luminaire Watts	45
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	2169.7 (285H, 67.5V)
Max. Cd. (<90 Vert.)	2169.7 (285H, 67.5V)
Max. Cd. (At 90 Deg. Vert.)	0 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	817.3 (23.6%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	410.8	N.A.	11.9
FM (30-60)	1365.1	N.A.	39.4
FH (60-80)	800.4	N.A.	23.1
FVH (80-90)	59.6	N.A.	1.7
BL (0-30)	235.3	N.A.	6.8
BM (30-60)	375.3	N.A.	10.8
BH (60-80)	208.1	N.A.	6.0
BVH (80-90)	10.0	N.A.	0.3
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	3464.6	N.A.	100.0


BUG Rating B1-U0-G1

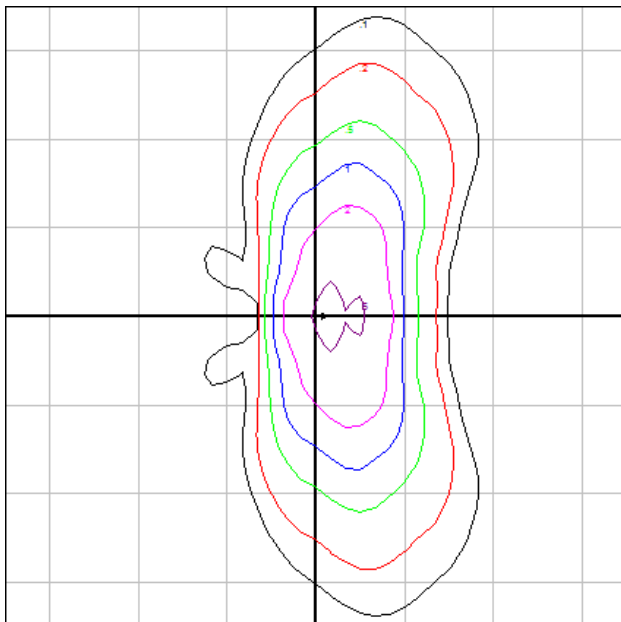

Mounting Height = 12 ft. Grid Spacing = 15 ft.

Luminaire Lumens

Uplight

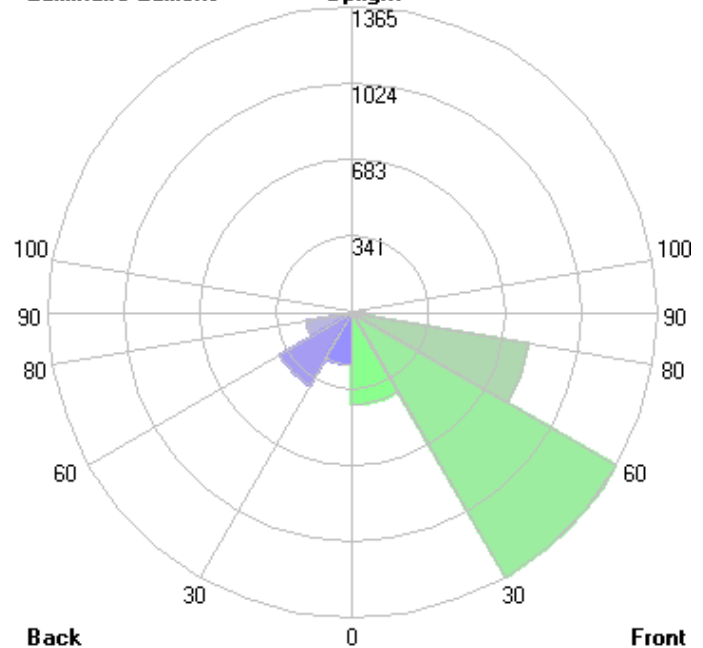

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2015

11/2/2015