


BEGA

File: 77911_BEGA_IES.ies

TEST: BE_77911K4
TEST LAB: BEGA
DATE: 02/15/2019
LUMINAIRE: 77 911K4
LAMP: 23.6W LED

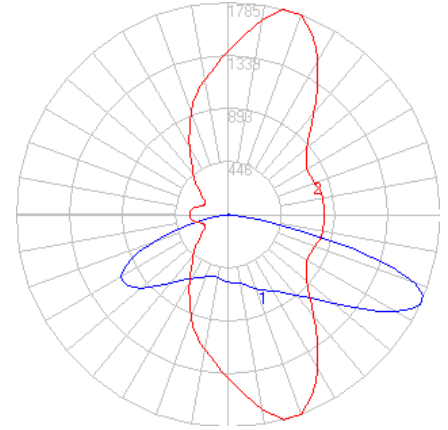

Characteristics


IES Classification	Type III
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3558
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	127
Total Luminaire Watts	28
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	1785.3 (290H, 65V)
Max. Cd. (<90 Vert.)	1785.3 (290H, 65V)
Max. Cd. (At 90 Deg. Vert.)	8.1 (0.2%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	337.7 (9.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	293.2	N.A.	8.2
FM (30-60)	1063.0	N.A.	29.9
FH (60-80)	885.1	N.A.	24.9
FVH (80-90)	22.7	N.A.	0.6
BL (0-30)	200.7	N.A.	5.6
BM (30-60)	691.3	N.A.	19.4
BH (60-80)	388.3	N.A.	10.9
BVH (80-90)	12.0	N.A.	0.3
UL (90-100)	1.7	N.A.	0.0
UH (100-180)	< 0.05	N.A.	0.0
Total	3558.0	N.A.	100.0


BUG Rating B1-U0*-G1

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, there is no significant uplight (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

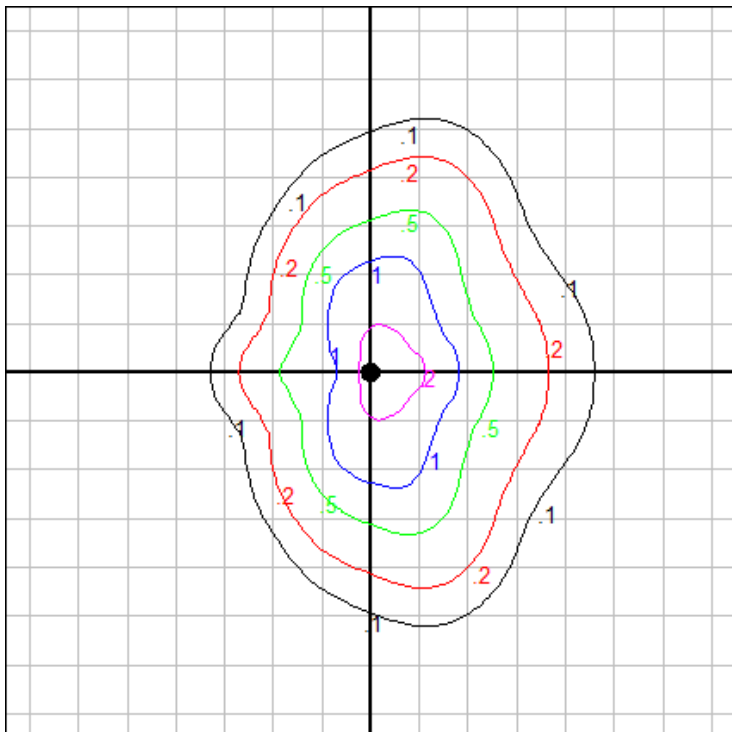

Mounting Height: 15 ft.

Grid Spacing: 10 ft.

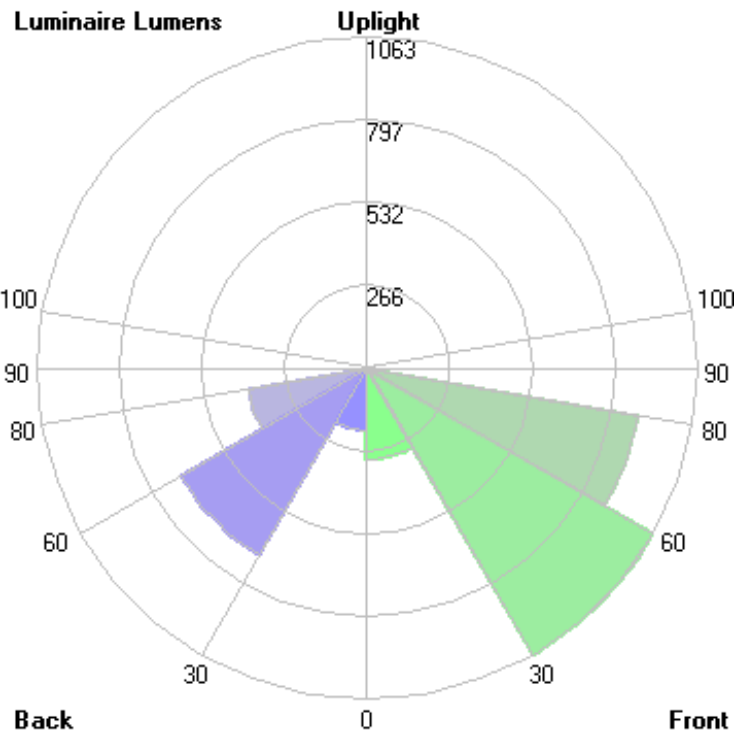

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2023

1/20/2023