


BEGA

Photometric Filename: 77917.ies



TEST: 20628
 TEST LAB: LUMINAIRE TESTING LABORATORY, INC.
 DATE: 1/8/2011
 LUMINAIRE: 77 917
 LAMP: 19.8W LED

All results in accordance with IESNA LM-79-08

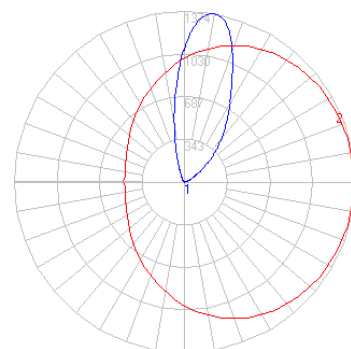


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1325
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	55
Total Luminaire Watts	24.3
Ballast Factor	1.00
CIE Type	Semi-Indirect
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	1.56 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	0.04
10-20	0.47
20-30	1.49
30-40	3.09
40-50	5.53
50-60	10.33
60-70	24.07
70-80	72.20
80-90	186.06
90-100	299.28
100-110	297.53
110-120	205.76
120-130	123.89
130-140	63.77
140-150	23.67
150-160	6.24
160-170	1.22
170-180	0.09

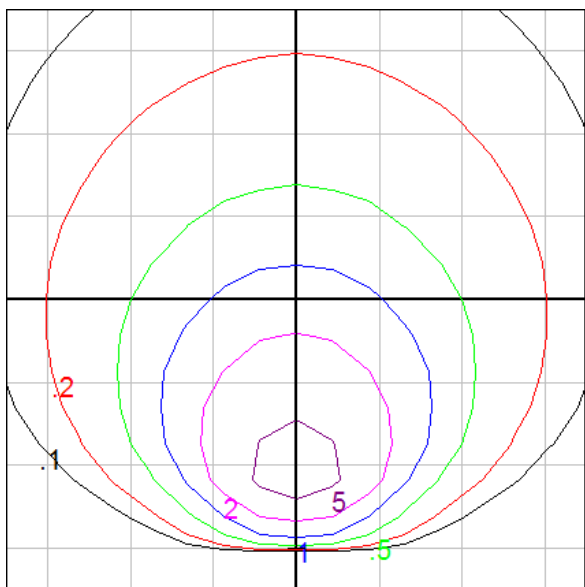

Fixture Setback = 4 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2015

8/12/2015