


Tools Required:

- 4mm hex screwdriver
- Adjustable wrench

Overview:

LED Watts: (2) 15.8W
 System Watts: 40.0W
 Controllability: 0-10V dimmable
 Weight: 25.1 lbs.
 Protection Class: IP66

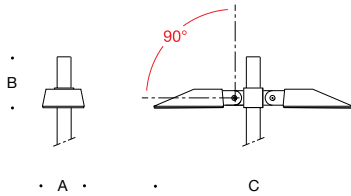

Dimensions


A: 8 7/8"
 B: 10 5/8"
 C: 38 3/4"



Notice to Installer:

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits 3" O.D. poles.
4. LED module and integral driver provided by BEGA.
5. Pole top luminaire supplied with 25 feet of cable to route through pole.
6. DO NOT open luminaire unless instructed to do so by factory.

Figure 1: Adjustability

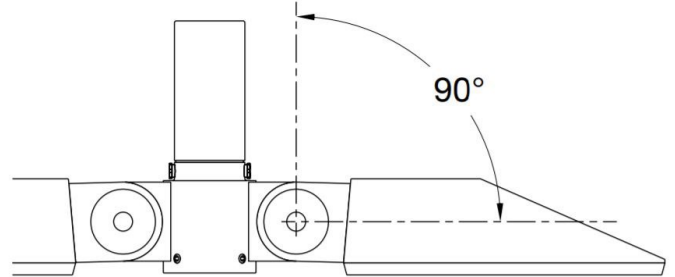

Installation: Luminaire

1. Route the luminaire wiring through pole to the base and slip luminaire over the top of the pole.
 2. Secure luminaire to pole by tightening the (4) 4mm hex set screws on the pole fitter.
 3. Make supply wiring and luminaire wiring connections in the base of the pole:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- 0-10V Dimming (if applicable):**
 DIMMING CONTROL WIRE (+) TO PURPLE LUMINAIRE WIRE
 DIMMING CONTROL WIRE (-) TO GREY LUMINAIRE WIRE
4. To adjust luminaire head up to 90°, loosen the nut at the luminaire knuckle, adjust luminaire head, and re-tighten the nut to secure (Figure 1).

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.