


**Tools Required:**

- 6mm hex head screwdriver


**Overview:**

LED Watts: 24.0W  
 System Watts: 28.0W  
 Controllability: 0-10V dimmable  
 Weight: 14.1 lbs.  
 Protection Class: IP65

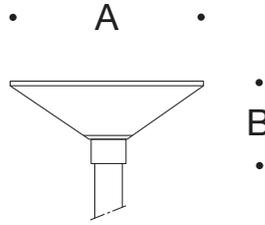

**Dimensions**

**A:** 19-5/8"  
**B:** 8-7/8"

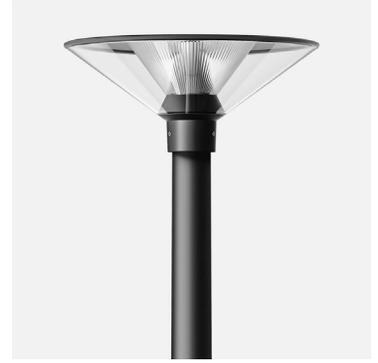

**Notice to Installer:**

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits over 3" O.D. poles only.
4. Tighten (3) 6mm hex head set screws to 8.85 ft-lb.
5. Pole top is provided with 25' supply wire bundle to route through the pole.
6. DO NOT open pole top during installation.

**84481 Luminaire Installation:**

1. Route supply wire bundle supplied with the luminaire through the pole.
2. Slip luminaire over the top of the pole or tenon, ensure wires are not pinched.
3. Secure luminaire to pole by evenly tightening (3) 6mm set screws.
4. Make supply wiring connections in the base of the pole  
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
 0-10V dimming (if applicable):  
 DIM CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE  
 DIM CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.  
 Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.  
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.  
LES FILS D'ALIMENTATION 60°C MIN.**