



BEGA

File: 84493K4_BEGA_IES.ies

TEST: BE_84493K4
TEST LAB: BEGA
DATE: 11/3/2015
LUMINAIRE: 84 493K4
LAMP: 29.4W LED

Characteristics


IES Classification	Type V
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3768
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	105
Total Luminaire Watts	36
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	988.6 (0H, 65V)
Max. Cd. (<90 Vert.)	988.6 (0H, 65V)
Max. Cd. (At 90 Deg. Vert.)	2.5 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	283.9 (7.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

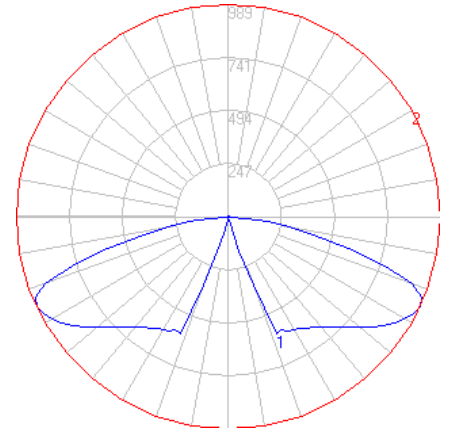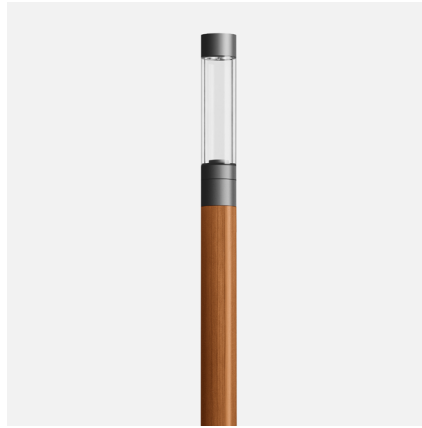


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	150.6	N.A.	4.0
FM (30-60)	879.3	N.A.	23.3
FH (60-80)	789.5	N.A.	21.0
FVH (80-90)	57.5	N.A.	1.5
BL (0-30)	150.6	N.A.	4.0
BM (30-60)	879.3	N.A.	23.3
BH (60-80)	789.5	N.A.	21.0
BVH (80-90)	57.5	N.A.	1.5
UL (90-100)	1.6	N.A.	0.0
UH (100-180)	12.3	N.A.	0.3
Total	3767.7	N.A.	100.0

BUG Rating B2-U2-G1

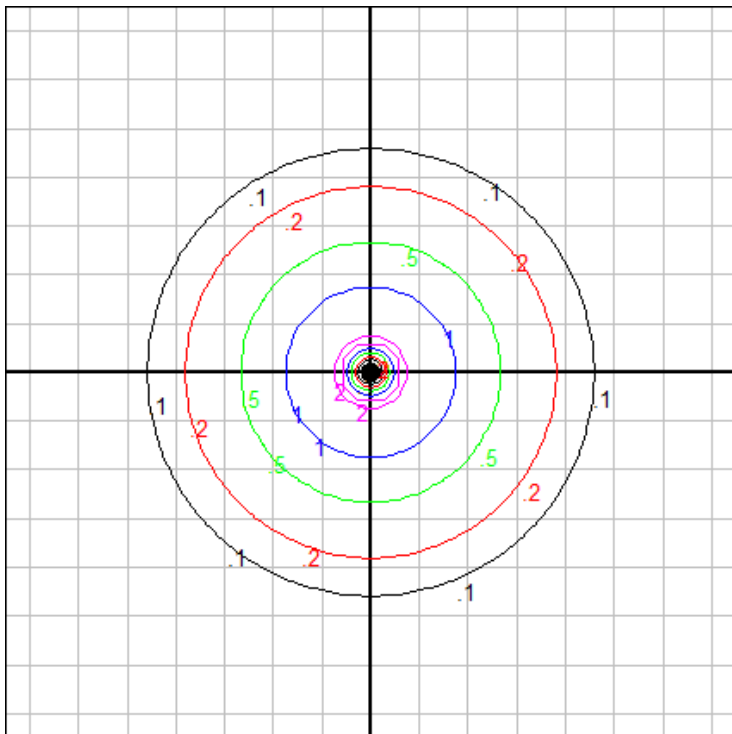

Grid Spacing: 10 ft.

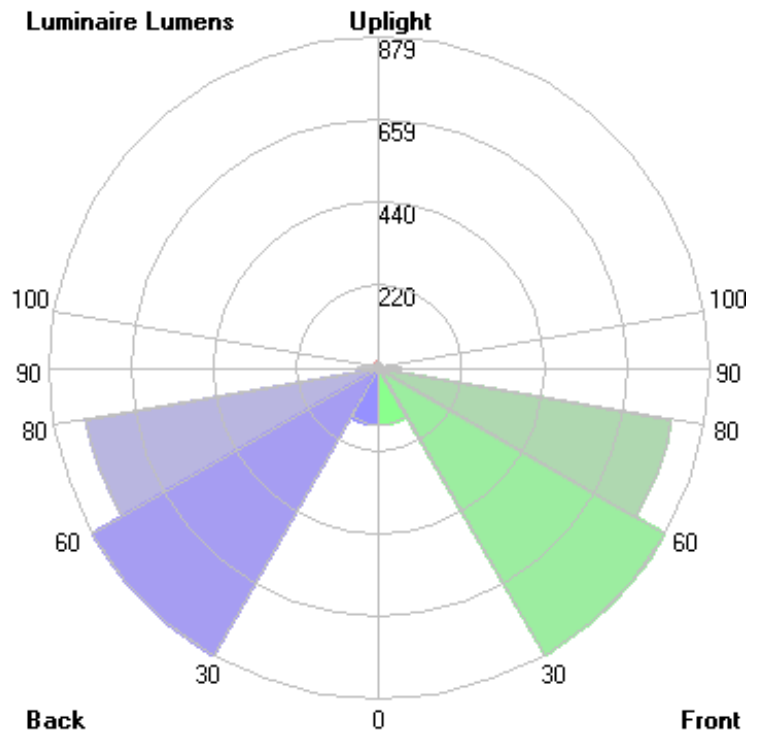

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

11/1/2022

BEGA

File: 84493K35_BEGA_IES.ies

TEST: BE_84493K4
TEST LAB: BEGA
DATE: 11/3/2015
LUMINAIRE: 84 493K35
LAMP: 29.4W LED

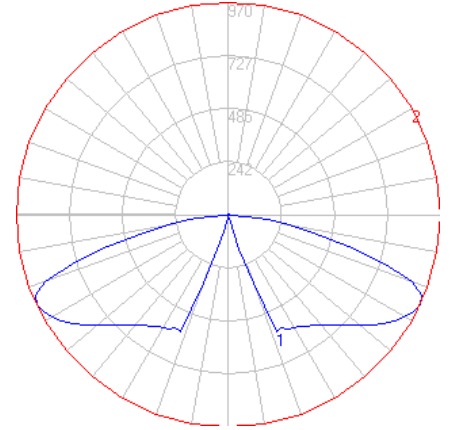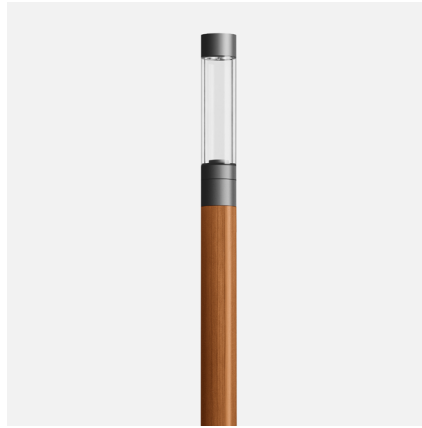


Characteristics

IES Classification	Type V
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3696
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	103
Total Luminaire Watts	36
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	969.817 (0H, 65V)
Max. Cd. (<90 Vert.)	969.817 (0H, 65V)
Max. Cd. (At 90 Deg. Vert.)	2.453 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	278.506 (7.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	147.7	N.A.	4.0
FM (30-60)	862.6	N.A.	23.3
FH (60-80)	774.5	N.A.	21.0
FVH (80-90)	56.4	N.A.	1.5
BL (0-30)	147.7	N.A.	4.0
BM (30-60)	862.6	N.A.	23.3
BH (60-80)	774.5	N.A.	21.0
BVH (80-90)	56.4	N.A.	1.5
UL (90-100)	1.5	N.A.	0.0
UH (100-180)	12.1	N.A.	0.3
Total	3696.0	N.A.	100.0

BUG Rating B2-U2-G1

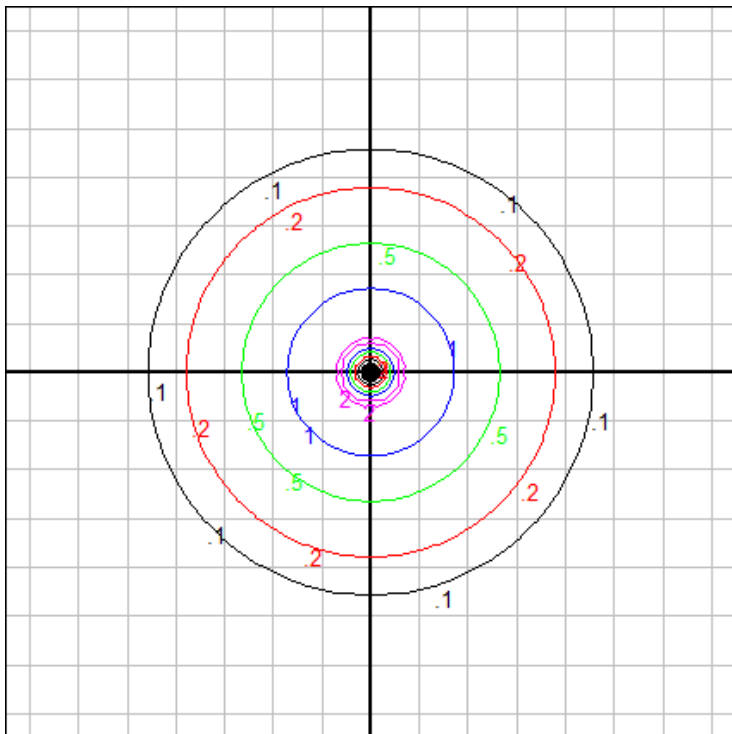

Grid Spacing: 10 ft.

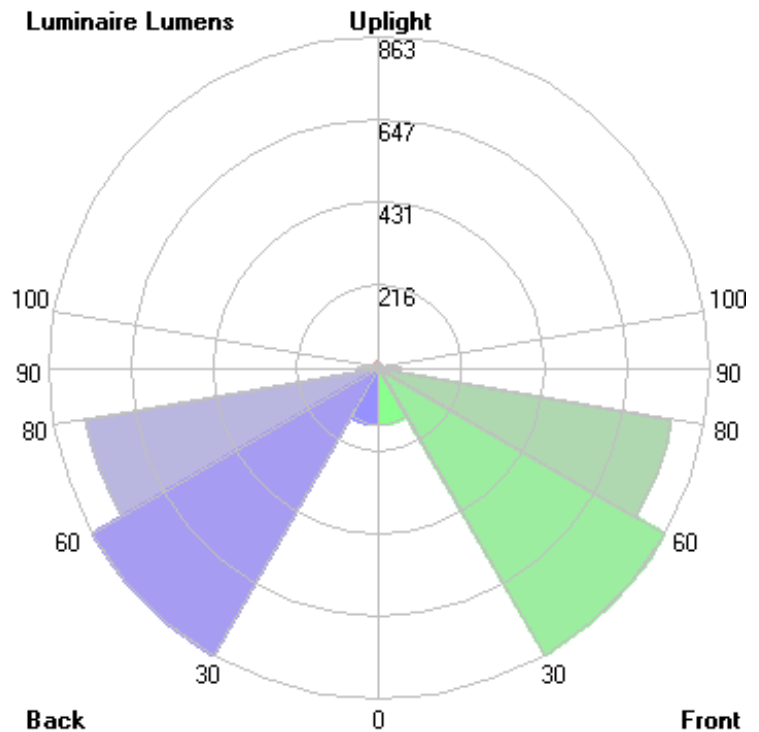

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

11/1/2022

BEGA

File: 84493K3_BEGA_IES.ies

TEST: BE_84493K4
TEST LAB: BEGA
DATE: 11/3/2015
LUMINAIRE: 84 493K3
LAMP: 29.4W LED

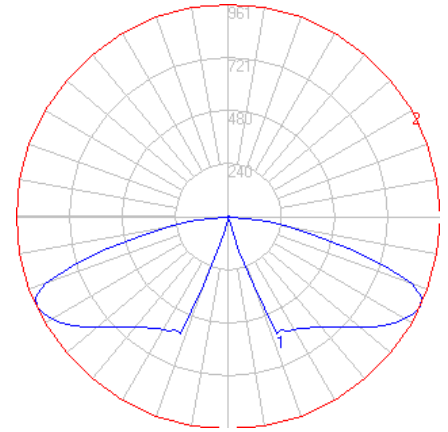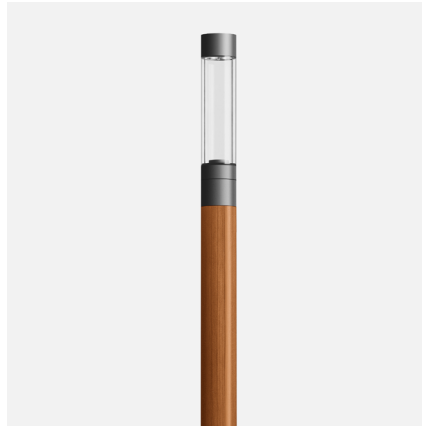


Characteristics

IES Classification	Type V
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3662
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	102
Total Luminaire Watts	36
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	960.919 (0H, 65V)
Max. Cd. (<90 Vert.)	960.919 (0H, 65V)
Max. Cd. (At 90 Deg. Vert.)	2.43 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	275.951 (7.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	146.4	N.A.	4.0
FM (30-60)	854.7	N.A.	23.3
FH (60-80)	767.4	N.A.	21.0
FVH (80-90)	55.9	N.A.	1.5
BL (0-30)	146.4	N.A.	4.0
BM (30-60)	854.7	N.A.	23.3
BH (60-80)	767.4	N.A.	21.0
BVH (80-90)	55.9	N.A.	1.5
UL (90-100)	1.5	N.A.	0.0
UH (100-180)	11.9	N.A.	0.3
Total	3662.2	N.A.	100.0

BUG Rating B2-U2-G1

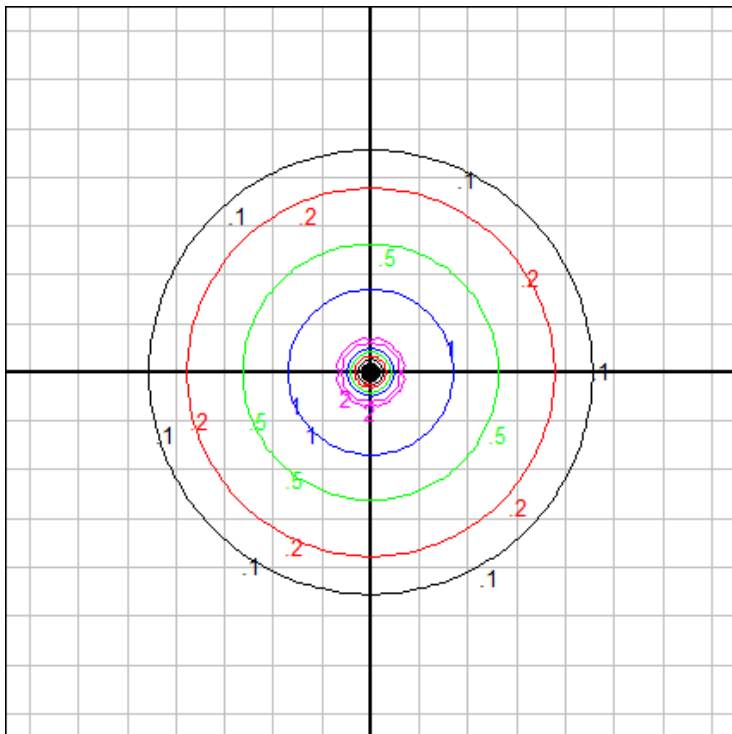

Grid Spacing: 10 ft.

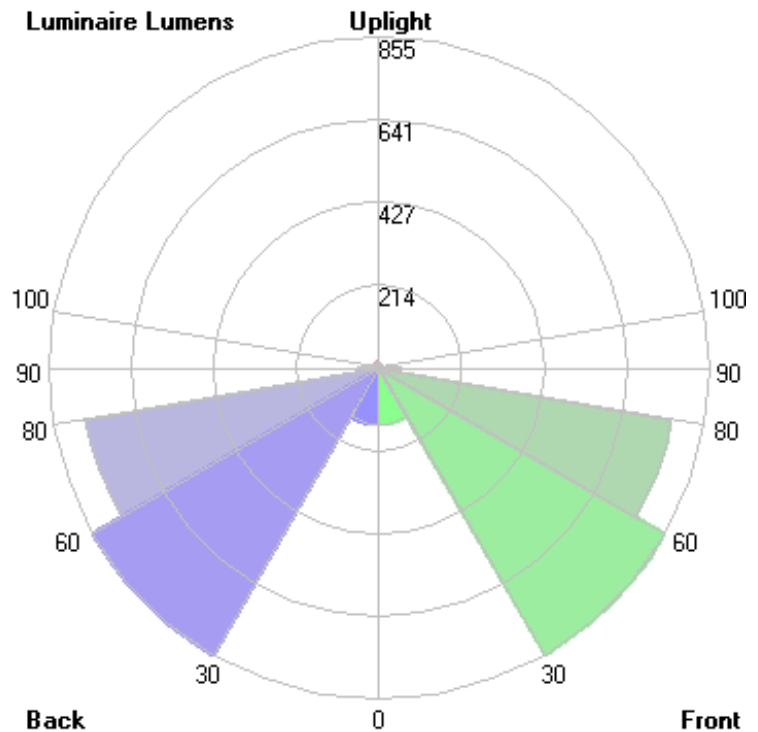

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

11/1/2022



BEGA

File: 84493K27_BEGA_IES.ies

TEST: BE_84493K4
TEST LAB: BEGA
DATE: 11/3/2015
LUMINAIRE: 84 493K27
LAMP: 29.4W LED

Characteristics


IES Classification	Type V
Longitudinal Classification	Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3549
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	99
Total Luminaire Watts	36
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	931.261 (0H, 65V)
Max. Cd. (<90 Vert.)	931.261 (0H, 65V)
Max. Cd. (At 90 Deg. Vert.)	2.355 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	267.434 (7.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

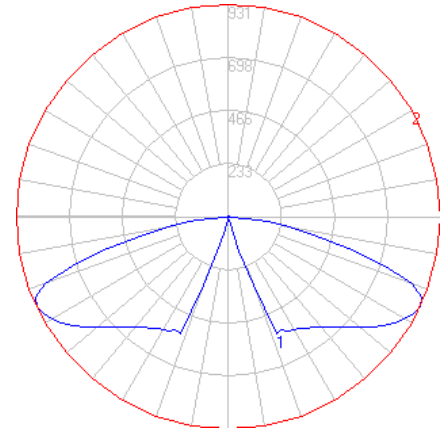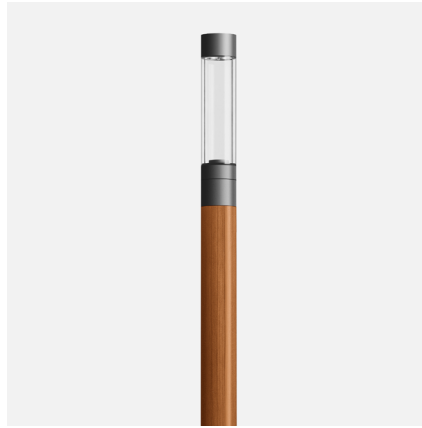


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	141.8	N.A.	4.0
FM (30-60)	828.3	N.A.	23.3
FH (60-80)	743.7	N.A.	21.0
FVH (80-90)	54.1	N.A.	1.5
BL (0-30)	141.8	N.A.	4.0
BM (30-60)	828.3	N.A.	23.3
BH (60-80)	743.7	N.A.	21.0
BVH (80-90)	54.1	N.A.	1.5
UL (90-100)	1.5	N.A.	0.0
UH (100-180)	11.6	N.A.	0.3
Total	3548.9	N.A.	100.0

BUG Rating B2-U2-G1

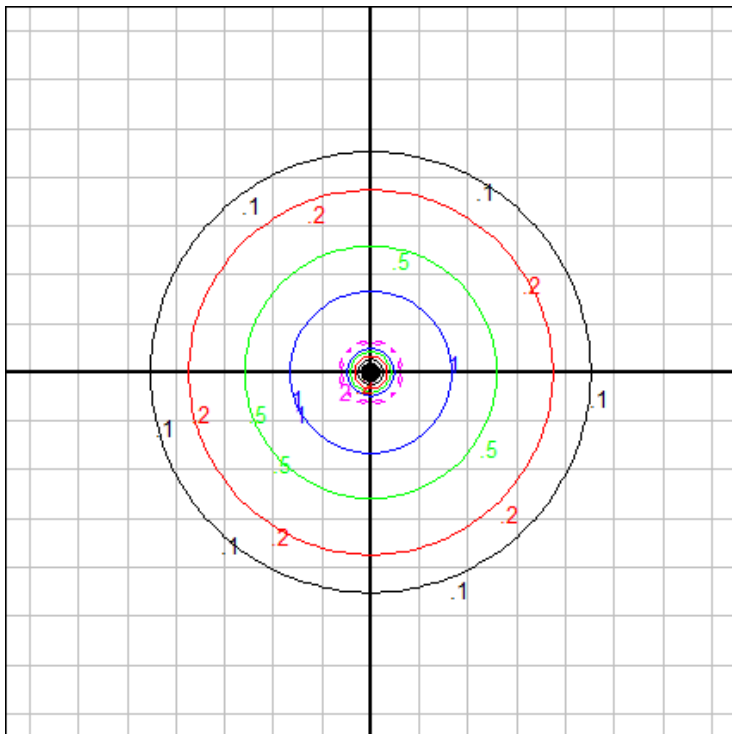

Grid Spacing: 10 ft.

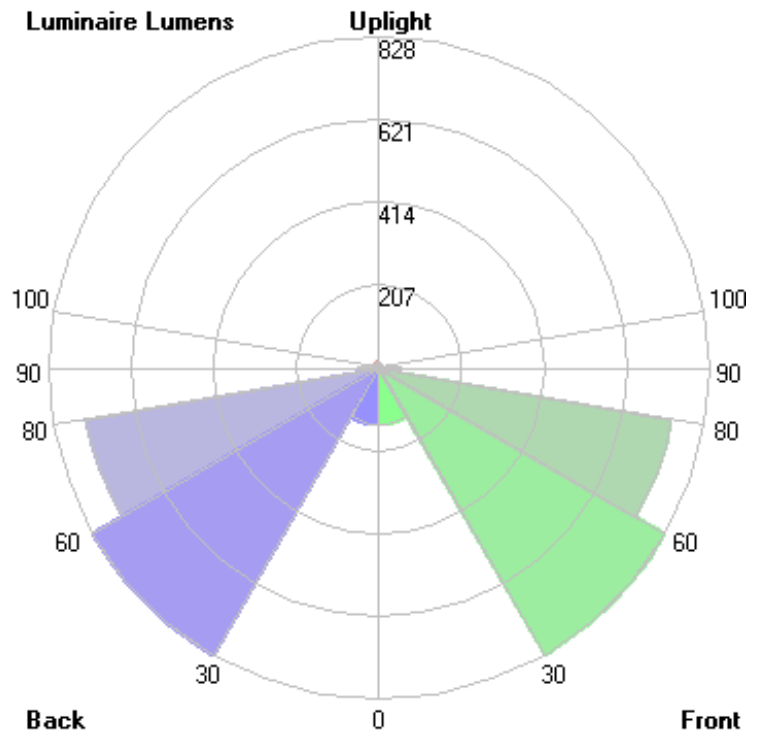

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

11/1/2022