


**Tools Required:**

- 5mm hex screw driver

**Overview:**

LED Watts: 29.4W  
 System Watts: 35.0W  
 Controllability: 0-10V, TRIAC, and ELV dimmable  
 Weight: 11.2 lbs.  
 Protection Class: IP65



**Dimensions**

**A:** 6-3/4

**B:** 23-3/4



**Notice to Installer for 84 816:**

1. See page 2 for specific product safety warnings.
2. System building element head is only compatible with system building element poles. See website for compatible head and pole options.
3. Fixture may be damaged if connected to conduit systems that contain water - Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
4. Wet location listing does not imply suitability for exposure to standing water for long periods of time.
5. System building element head is provided with 15' of flexible conduit and a 25' wire bundle.
6. System building element head is rotatable on system building element pole.

**NOTE: For proper installation, an accompanying building element pole must be selected with the building element head.**

**84 816 installation:**

1. Install building element pole per installation instructions (separate).
2. Drop wire bundle and flexible conduit into system element pole for wiring connections to be made at base.
3. Insert building element head into building element pole.
4. Secure building element head to pole by tightening (3) 5mm hex head set screw located on the pole.
5. Wiring connections are accessible behind the hand hole on the system element pole.


Make supply wiring and cable connections behind access door:

MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN (GROUND) WIRE TO GREEN LUMINAIRE WIRE

0-10V DIMMING (OR DALI DIMMING) IF APPLICABLE

DIMMING CONTROL (+) TO POSITIVE LUMINAIRE CONTROL WIRE  
 DIMMING CONTROL (-) TO NEGATIVE LUMINAIRE CONTROL WIRE

**Figure 1:**

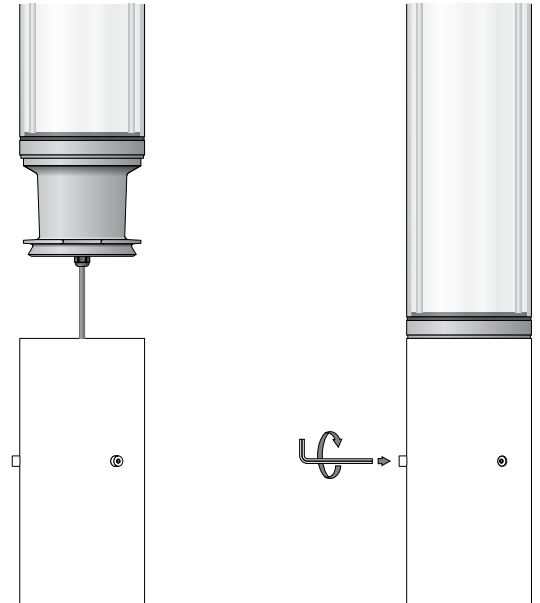

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.  
SUITABLE FOR WET LOCATIONS.  
SUITABLE FOR MOUNTING WITHIN 1.2M (4FT) OF THE GROUND  
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.  
CONVIENT AUX EMPLACEMENTS MOUILLÉS.  
PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL  
LES FILS D'ALIMENTATION 60°C MIN.**