


BEGA

File: 85179K4_BEGA_IES.ies

TEST: BE_85179K4
TEST LAB: BEGA
DATE: 11/21/2023
LUMINAIRE: 85 179K4
LAMP: 3.9W LED

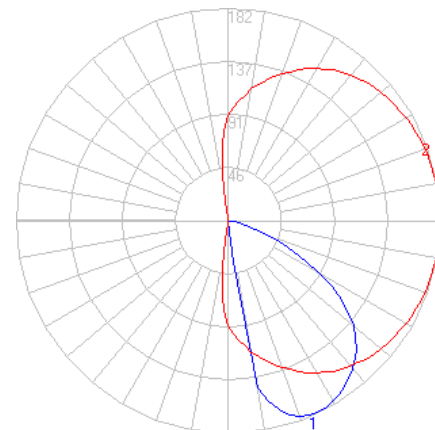

Characteristics


IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	236
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	47
Total Luminaire Watts	5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	182.22 (355H, 25V)
Max. Cd. (<90 Vert.)	182.22 (355H, 25V)
Max. Cd. (At 90 Deg. Vert.)	.253 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	3.967 (1.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	57.3	N.A.	24.3
FM (30-60)	142.0	N.A.	60.1
FH (60-80)	30.2	N.A.	12.8
FVH (80-90)	0.3	N.A.	0.1
BL (0-30)	2.5	N.A.	1.1
BM (30-60)	3.8	N.A.	1.6
BH (60-80)	0.1	N.A.	0.0
BVH (80-90)	0.0	N.A.	0.0
UL (90-100)	< 0.05	N.A.	0.0
UH (100-180)	< 0.05	N.A.	0.0
Total	236.2	N.A.	100.0

BUG Rating B0-U0*-G0

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplight (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

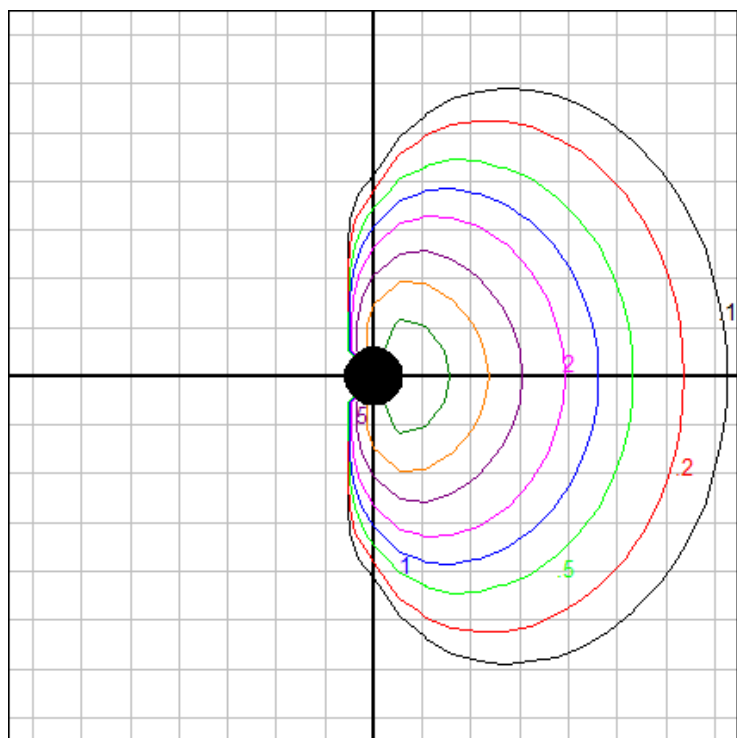

Grid Spacing: 1.0 ft.

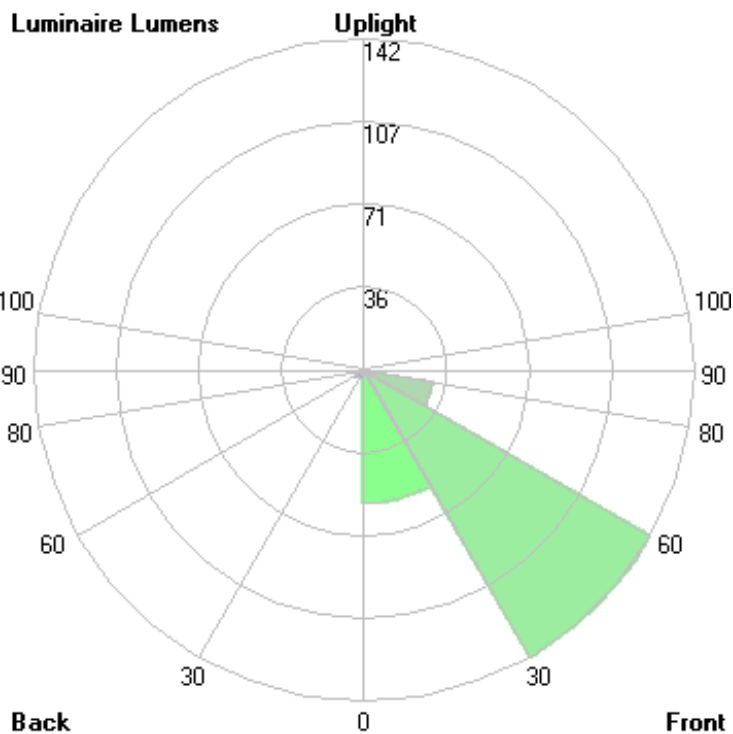

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

1/22/2026

BEGA

File: 85179K35_BEGA_IES.ies

TEST: BE_85179K4
TEST LAB: BEGA
DATE: 11/21/2023
LUMINAIRE: 85 179K35
LAMP: 3.9W LED

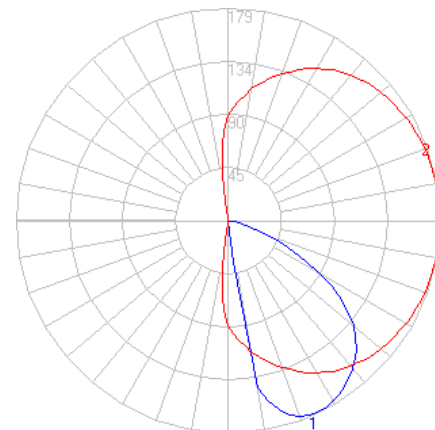

Characteristics


IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	232
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	46
Total Luminaire Watts	5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	179.197 (355H, 25V)
Max. Cd. (<90 Vert.)	179.197 (355H, 25V)
Max. Cd. (At 90 Deg. Vert.)	.249 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	3.901 (1.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	56.4	N.A.	24.2
FM (30-60)	139.7	N.A.	60.1
FH (60-80)	29.7	N.A.	12.8
FVH (80-90)	0.3	N.A.	0.1
BL (0-30)	2.5	N.A.	1.1
BM (30-60)	3.8	N.A.	1.6
BH (60-80)	0.1	N.A.	0.0
BVH (80-90)	0.0	N.A.	0.0
UL (90-100)	< 0.05	N.A.	0.0
UH (100-180)	< 0.05	N.A.	0.0
Total	232.5	N.A.	100.0

BUG Rating B0-U0*-G0

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplight (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

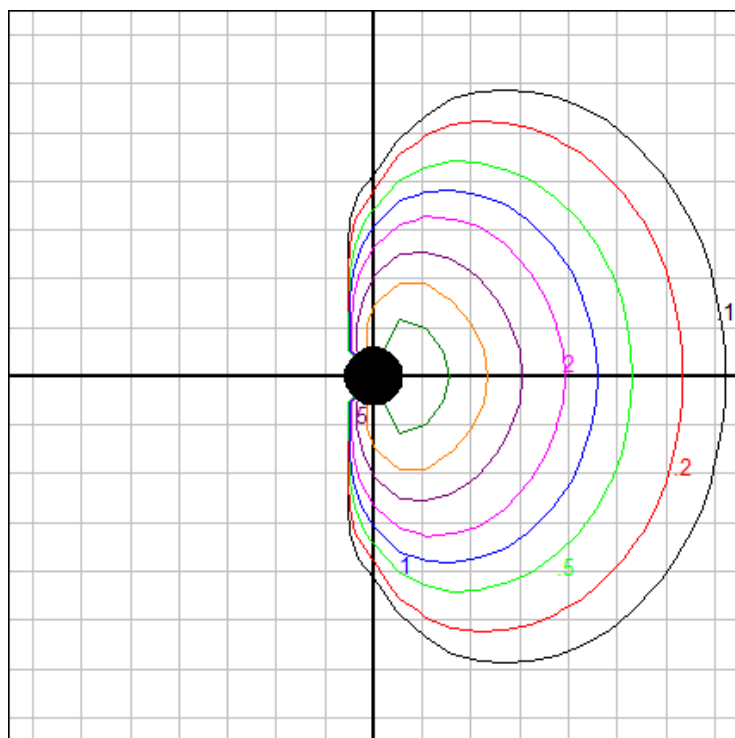

Grid Spacing: 1.0 ft.

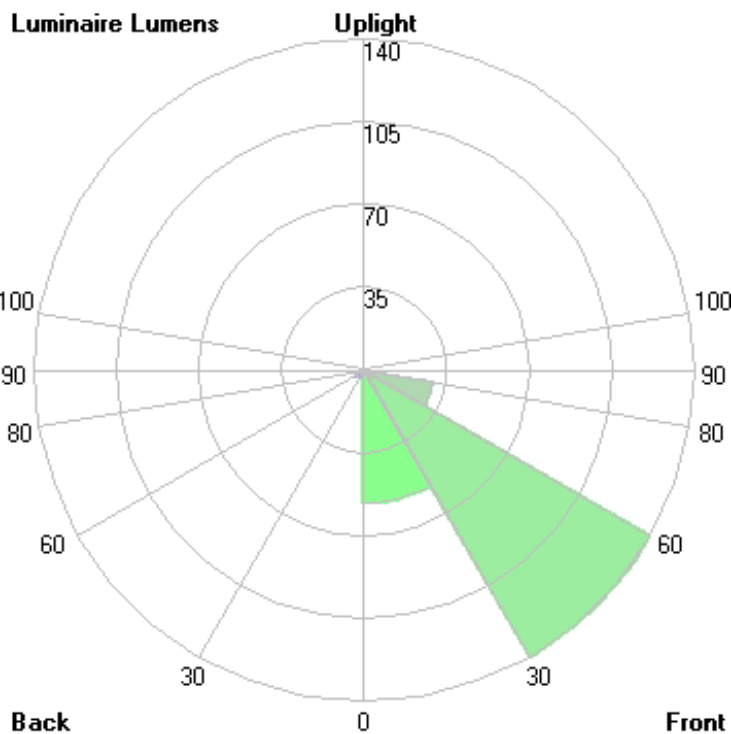

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

1/22/2026

BEGA

File: 85179K3_BEGA_IES.ies

TEST: BE_85179K4
TEST LAB: BEGA
DATE: 11/21/2023
LUMINAIRE: 85 179K3
LAMP: 3.9W LED

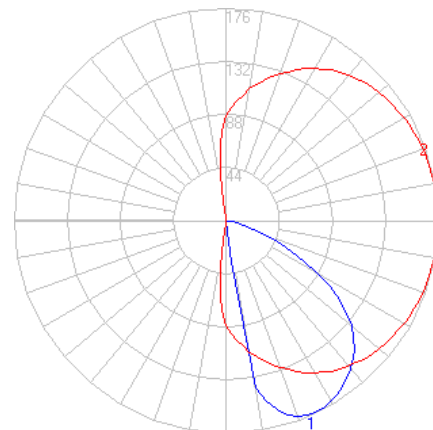

Characteristics


IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	228
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	46
Total Luminaire Watts	5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	176.174 (355H, 25V)
Max. Cd. (<90 Vert.)	176.174 (355H, 25V)
Max. Cd. (At 90 Deg. Vert.)	.245 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	3.835 (1.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	55.4	N.A.	24.3
FM (30-60)	137.3	N.A.	60.1
FH (60-80)	29.2	N.A.	12.8
FVH (80-90)	0.3	N.A.	0.1
BL (0-30)	2.5	N.A.	1.1
BM (30-60)	3.7	N.A.	1.6
BH (60-80)	0.1	N.A.	0.0
BVH (80-90)	0.0	N.A.	0.0
UL (90-100)	< 0.05	N.A.	0.0
UH (100-180)	< 0.05	N.A.	0.0
Total	228.5	N.A.	100.0

BUG Rating B0-U0*-G0

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplight (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

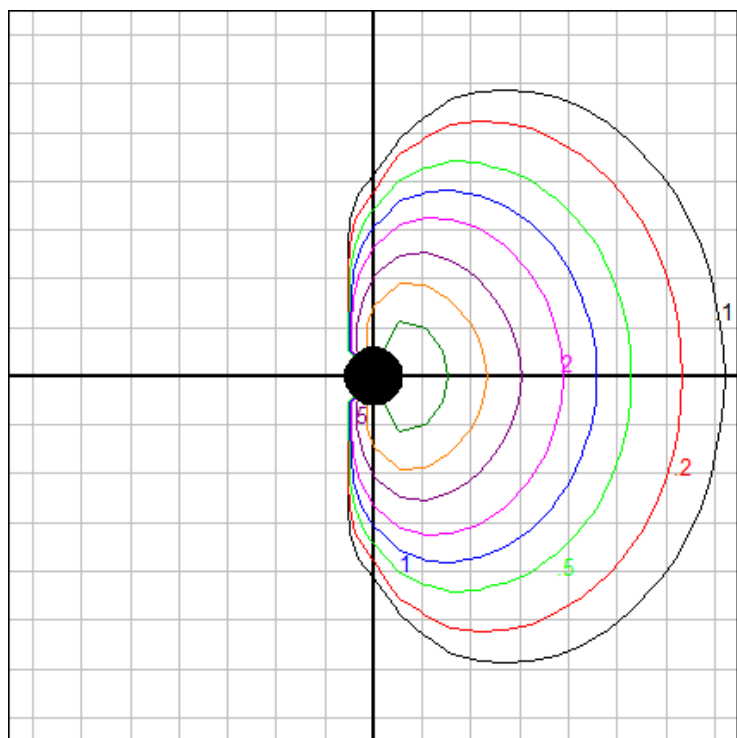

Grid Spacing: 1.0 ft.

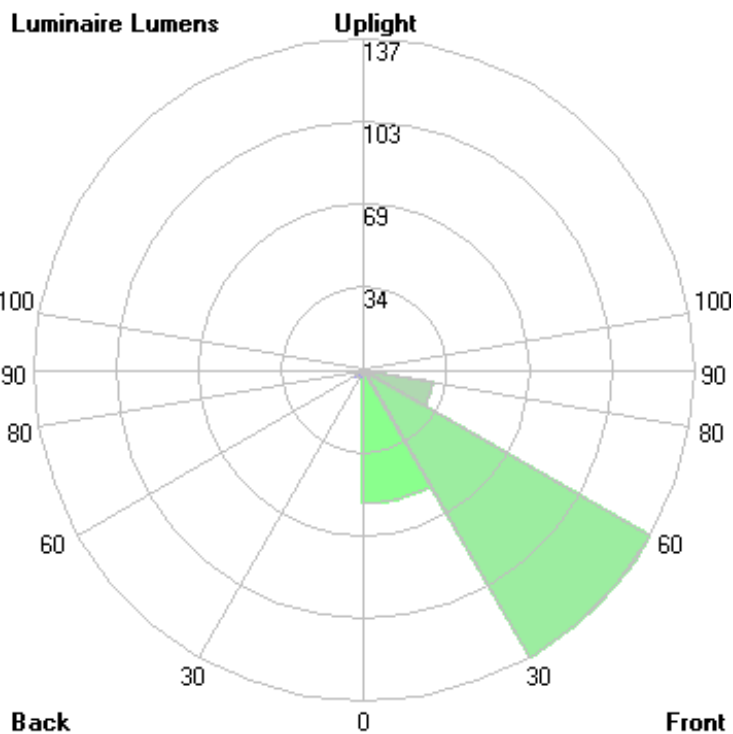

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

1/22/2026

BEGA

File: 85179K27_BEGA_IES.ies

TEST: BE_85179K4
TEST LAB: BEGA
DATE: 11/21/2023
LUMINAIRE: 85 179K27
LAMP: 3.9W LED

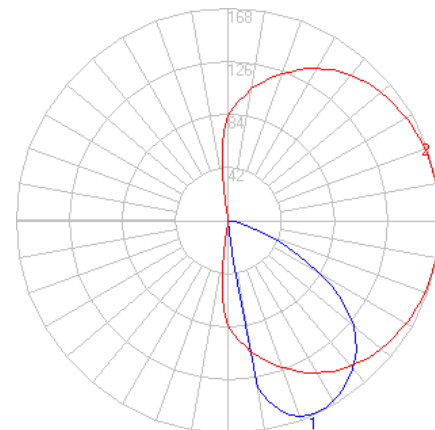

Characteristics


IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	217
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	43
Total Luminaire Watts	5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	167.538 (355H, 25V)
Max. Cd. (<90 Vert.)	167.538 (355H, 25V)
Max. Cd. (At 90 Deg. Vert.)	.233 (0.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	3.647 (1.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	52.7	N.A.	24.3
FM (30-60)	130.6	N.A.	60.1
FH (60-80)	27.7	N.A.	12.8
FVH (80-90)	0.3	N.A.	0.1
BL (0-30)	2.3	N.A.	1.1
BM (30-60)	3.5	N.A.	1.6
BH (60-80)	0.1	N.A.	0.0
BVH (80-90)	0.0	N.A.	0.0
UL (90-100)	< 0.05	N.A.	0.0
UH (100-180)	< 0.05	N.A.	0.0
Total	217.2	N.A.	100.0

BUG Rating B0-U0*-G0

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplight (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

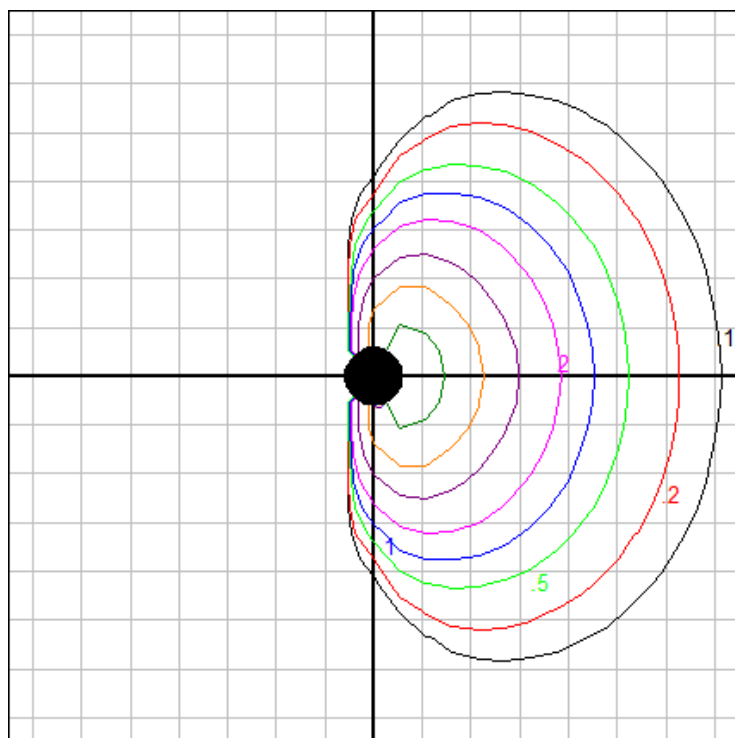

Grid Spacing: 1.0 ft.

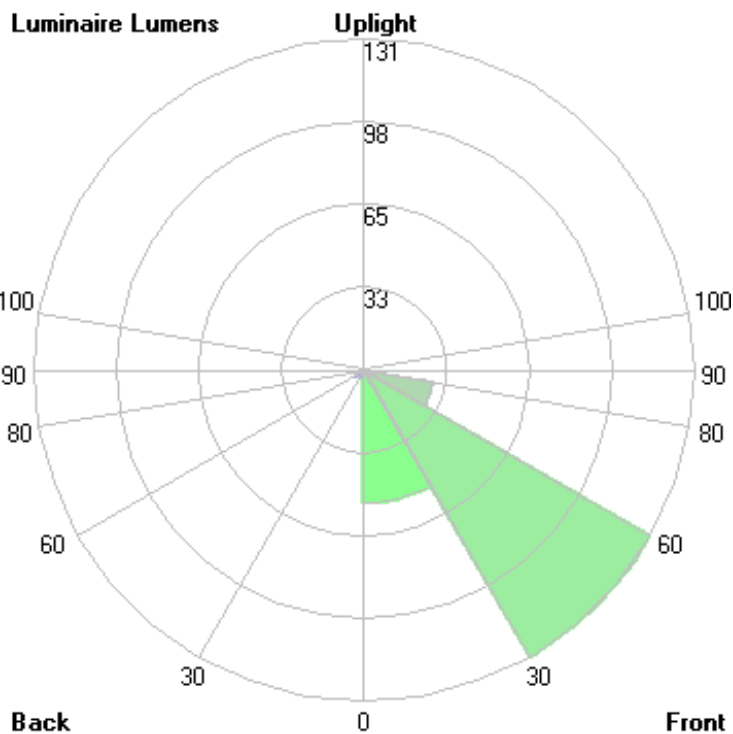

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

1/22/2026