


Tools Required:

- 4mm hex head screwdriver


Overview:

LED Watts: 37.0W
 System Watts: 44.0W
 Controllability: 0-10V dimmable
 Weight: 10.1 lbs.
 Protection Class: IP65



Dimensions

A: 13"
 B: 14-7/8"

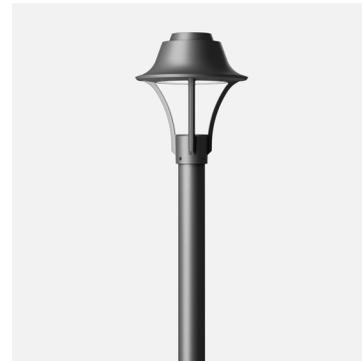

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits over 3" O.D. poles only.
4. Tighten (4) 4mm hex head set screws to 8.85 ft-lb (12Nm)
5. Pole top is provided with 25' cable to route through the pole.
6. DO NOT open pole top during installation.

85197 Luminaire Installation:

1. Route cable supplied with the luminaire through the pole.
 2. Slip luminaire over the top of the pole or tenon, ensure wires are not pinched.
 3. Aim luminaire to desired orientation.
 4. Secure luminaire to pole by evenly tightening (4) 4mm set screws.
 5. Make supply wiring connections in the base of the pole:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- 0-10V dimming (if applicable):
 DIM CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
 DIM CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
 Consult factory for all other replacement components.

Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.
MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.
LES FILS D'ALIMENTATION 60°C MIN.**