BEGA

Photometric Filename: 88262.IES

TEST:	BE_88262
TEST LAB:	BEGA
DATE:	8/29/2017
LUMINAIRE:	88 262
LAMP:	20.6W LED

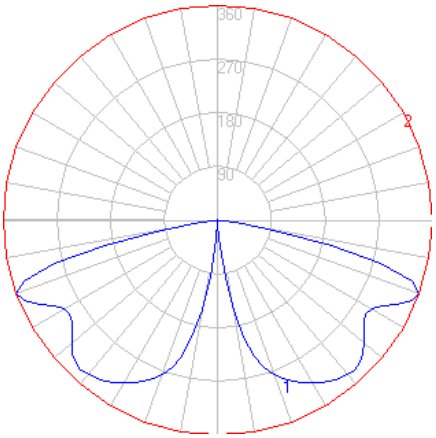

Characteristics

IES Classification	Type V
Longitudinal Classification	Medium
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1577
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	63
Total Luminaire Watts	25
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	359.9 (0H, 70V)
Max. Cd. (<90 Vert.)	359.9 (0H, 70V)
Max. Cd. (At 90 Deg. Vert.)	.1 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	95.7 (6.1%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	105.7	N.A.	6.7
FM (30-60)	368.6	N.A.	23.4
FH (60-80)	302.6	N.A.	19.2
FVH (80-90)	11.6	N.A.	0.7
BL (0-30)	105.7	N.A.	6.7
BM (30-60)	368.6	N.A.	23.4
BH (60-80)	302.6	N.A.	19.2
BVH (80-90)	11.6	N.A.	0.7
UL (90-100)	0.1	N.A.	0.0
UH (100-180)	0.5	N.A.	0.0
Total	1577.6	N.A.	100.0
BUG Rating	**B1-U1-G1**		

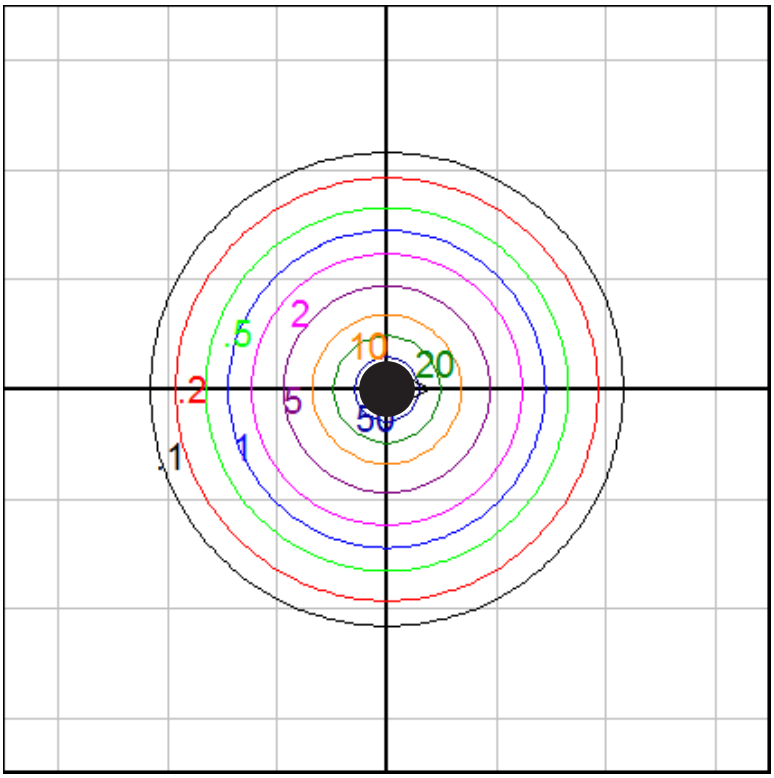

Grid Spacing = 5 ft.

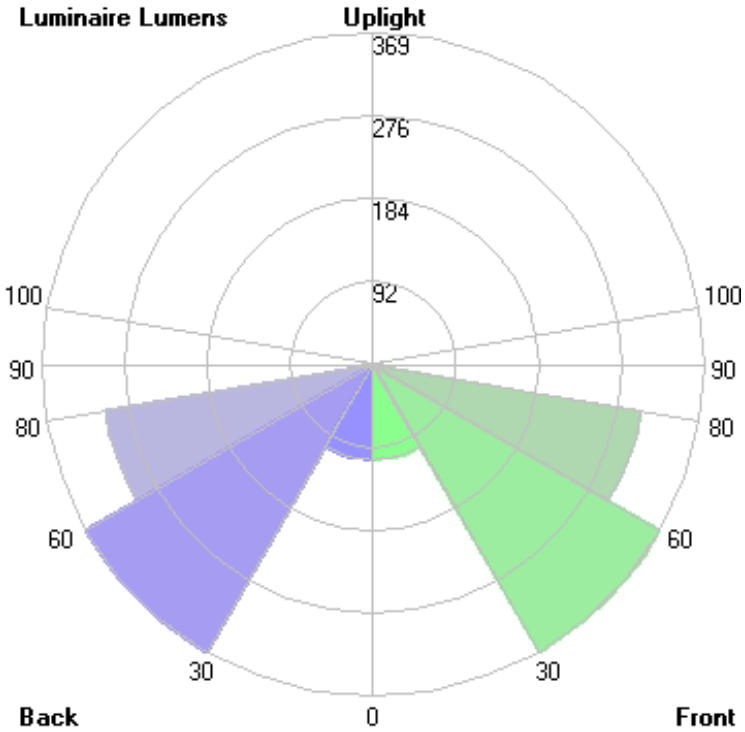

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.