

Application

Tapered round aluminum pole with fixed bell base. Useful for mounting pole-top luminaires, floodlights, banners, or other accessories. Consult a licensed structural engineer when specifying. Poles must be unwrapped when delivered and should not be allowed to sit in their packaging. Poles specified without pole tops require internal approval before release.

Materials & Specifications

Extruded aluminum
Covered handhole with hardware and grounding provisions provided
Anchor bolts conform to ASTM F1554 Grade 55 with L bend on one end and galvanized minimum 12" on threaded end
Anchor bolts provided with (2) hex nuts and (2) flat washers

Wall thickness: 0.118"
Structural weight: 59.0 lbs

Maximum Luminaire Weight: 60 lbs

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK)	Bronze (BRZ)
Silver (SLV)	White (WHT)
RAL:	CUS:


Type:
BEGA Pole:
Location:
Quote or Sales Order:
Date:
Specifier:
Representative:
BEGA Luminaire:
Total Mounted EPA:
Total Mounted Weight:

Available options

CUS	Custom finish
MGU	Marine grade undercoat
RAL	RAL Classic, matte finish

Included (available for pre-shipment)

898A	Anchorage kit
------	---------------

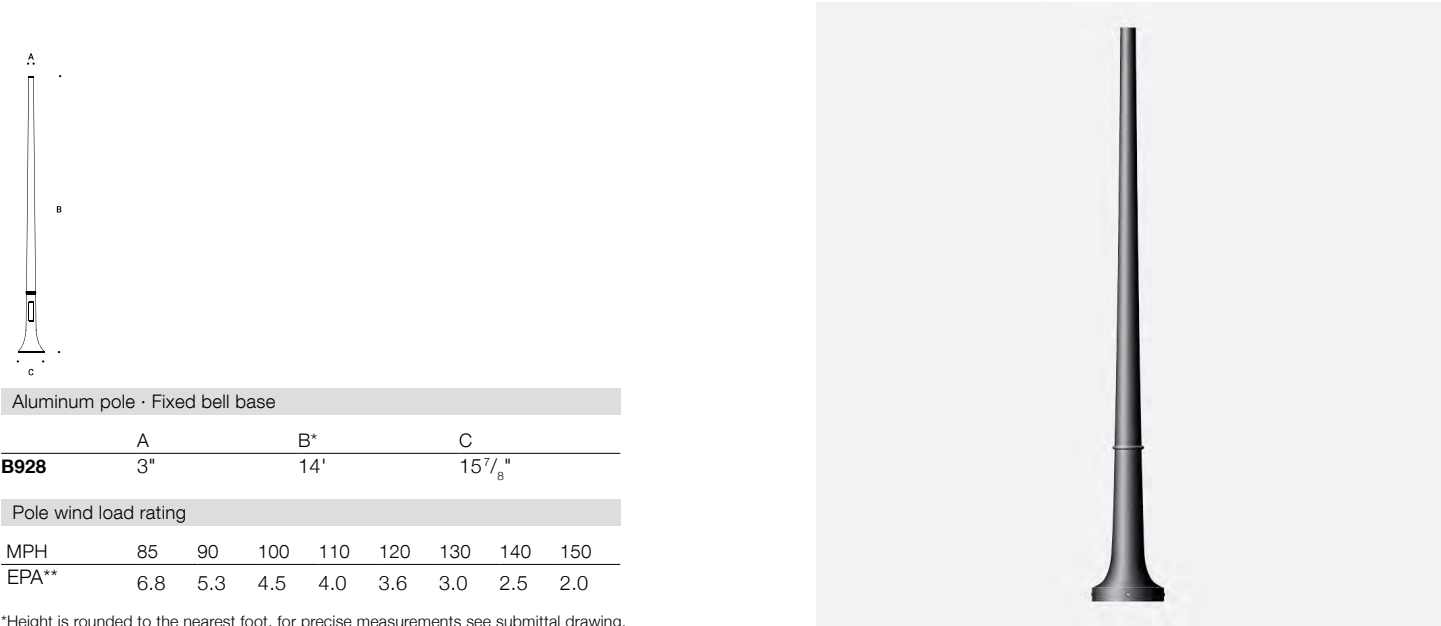

Aluminum pole · Fixed bell base								
	A		B*			C		
B928	3"		14'			15 ⁷ / ₈ "		
Pole wind load rating								
MPH	85	90	100	110	120	130	140	150
EPA**	6.8	5.3	4.5	4.0	3.6	3.0	2.5	2.0

*Height is rounded to the nearest foot, for precise measurements see submittal drawing.
**Data above assumes grade level installation and a maximum luminaire weight of 60 lbs.
BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 info@bega-us.com