


Hardware Included:

- M14x80mm Anchor Bolts
- Washers
- Nut

Overview:

Weight: 434.3 lbs.



Dimensions

A: 66-7/8"

B: 26"

C: 31-1/2"



Notice to Installer:

1. Ensure that the installation site is level, stable, and free from any obstructions.
2. Verify that the ground is suitable for anchoring the sunlounger securely.
3. Gather all the necessary tools and equipment required for the installation, such as a shovel, level, screwdriver, and hammer.
4. Check for underground utilities or cables before digging or anchoring the sunlounger.
5. Anchor kit provided to install into poured concrete.
6. Ensure that the anchoring or mounting method is suitable for the type of surface and provides adequate stability and security.
7. Consider any local regulations or codes regarding outdoor furniture installation and safety requirements.

Install Instructions:

1. Choose a suitable location for the sunlounger. Ensure the area is on a level surface that provides stability and comfort and is clear of any debris, rocks, or other obstacles.
 - **NOTE: When installing in soft scape (i.e. mulch, gravel) ensure a suitable concrete pad/foundation is provided to properly anchor the sunlounger**
2. Remove top hex nuts and washers from each bolt and install anchorage kit using either method:
 - Construct template to attach to forming or cross bracing. Level template properly. Pour concrete. For template details, refer to Figures 1 and 2.
 - Insert anchorage assembly into poured concrete. Concrete must be vibrated to ensure proper anchorage setting.
 - **NOTE: Allow adequate time for concrete to cure properly.**
3. Smooth concrete pad as required.
4. Bolt the sunlounger base to the anchorage kit using the (3) hex bolts and washers removed in Step 2. Reference Figure 3. Ensure all components are securely fastened.

Figure 1:

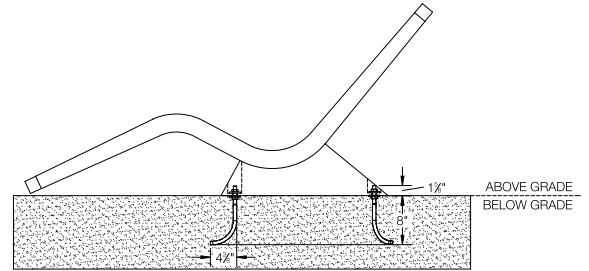


Figure 2:


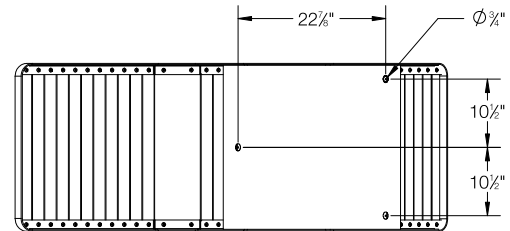


Figure 3:

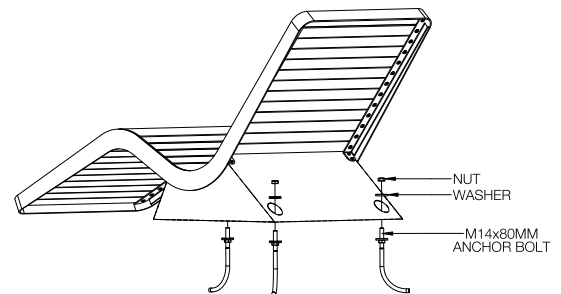

Maintenance & Care:

Should cleaning be required, use a rag/cloth dampened with water to remove any contaminants/particulates from the surface of the material. The removal of greasy, oily or sooty substances can take place with the use of white spirit free of aromatic compounds or isopropyl alcohol. Mild cleaning solutions can be utilized though are not required if maintenance is needed.