


BEGA

Photometric Filename: 77265K3.ies

TEST: BE5924
TEST LAB: BEGA
DATE: 5/15/2013
LUMINAIRE: 77 265
LAMP: 4.2W LED

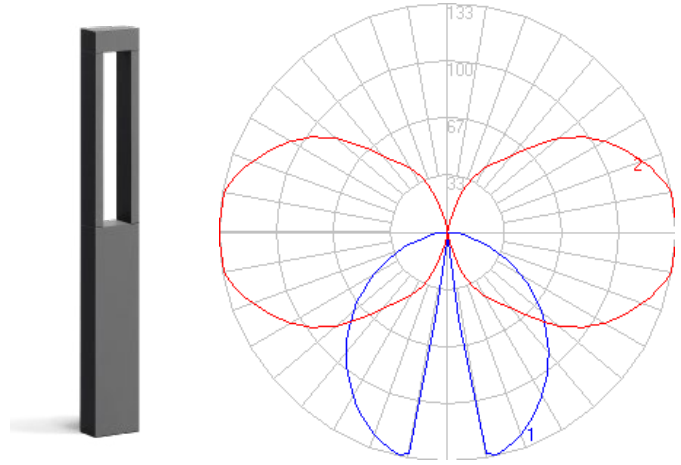


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	156
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	26
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	49.18
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	26.18
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	0.12 ft
Luminous Height	0.00 ft


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	24.8	N.A.	16.0
FM (30-60)	40.9	N.A.	26.3
FH (60-80)	11.4	N.A.	7.3
FVH(80-90)	0.7	N.A.	0.5
BL (0-30)	24.8	N.A.	16.0
BM (30-60)	40.9	N.A.	26.3
BH (60-80)	11.4	N.A.	7.3
BVH(80-90)	0.7	N.A.	0.5
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	155.6	N.A.	100.0

v
BUG Rating B0-U0-G0=

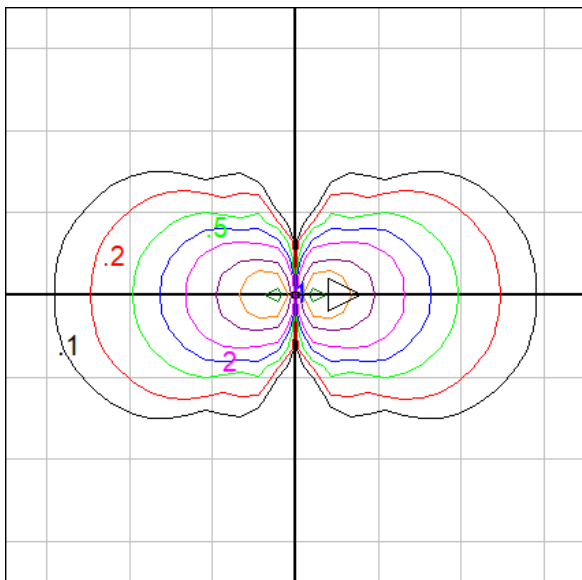

Grid Spacing = 2.5 ft.

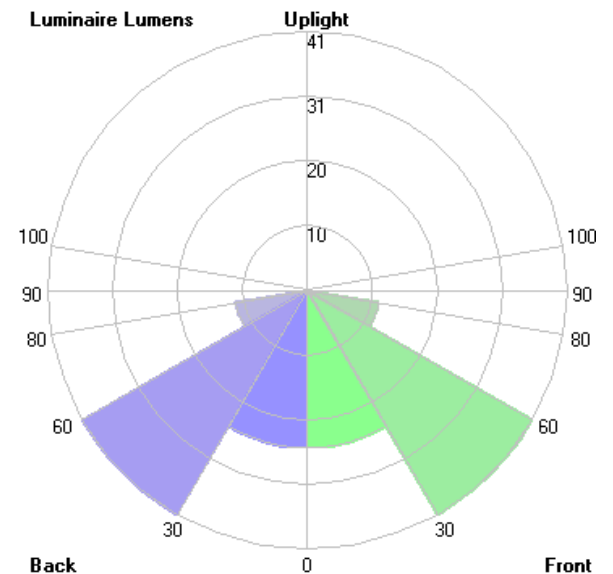

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2019

3/21/2019