


BEGA

Photometric Filename: 22652.IES

TEST: BE_22652
TEST LAB: BEGA
DATE: 2/10/2017
LUMINAIRE: 22 652
LAMP: 6.7W LED

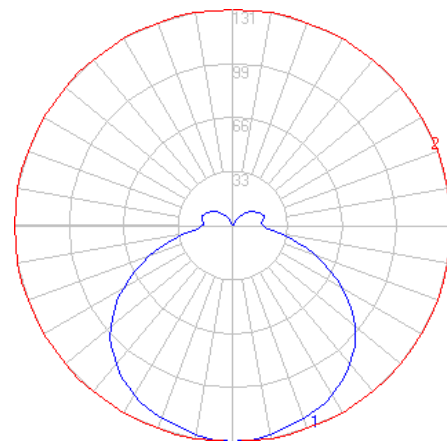


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	575
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	64
Total Luminaire Watts	9
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.36
Spacing Criterion (90-270)	1.36
Spacing Criterion (Diagonal)	1.52
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.72 ft
Luminous Width (90-270)	0.72 ft
Luminous Height	0.15 ft

Zonal Lumen Summary

Zone	Lumens
0-10	12.42
10-20	35.70
20-30	55.84
30-40	71.37
40-50	80.11
50-60	79.76
60-70	68.23
70-80	47.56
80-90	28.95
90-100	24.35
100-110	24.32
110-120	20.18
120-130	14.23
130-140	8.13
140-150	3.29
150-160	0.59
160-170	0.03
170-180	0.02

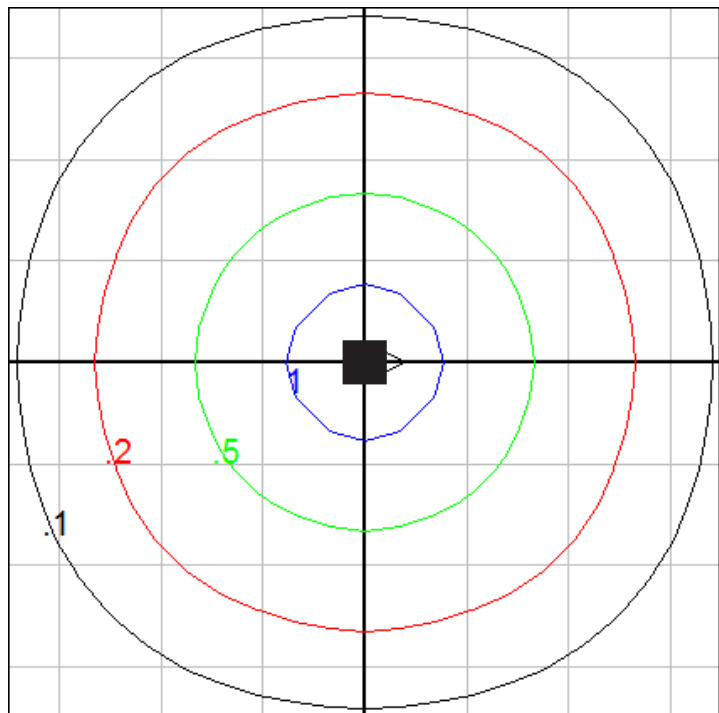

Ceiling mount - isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

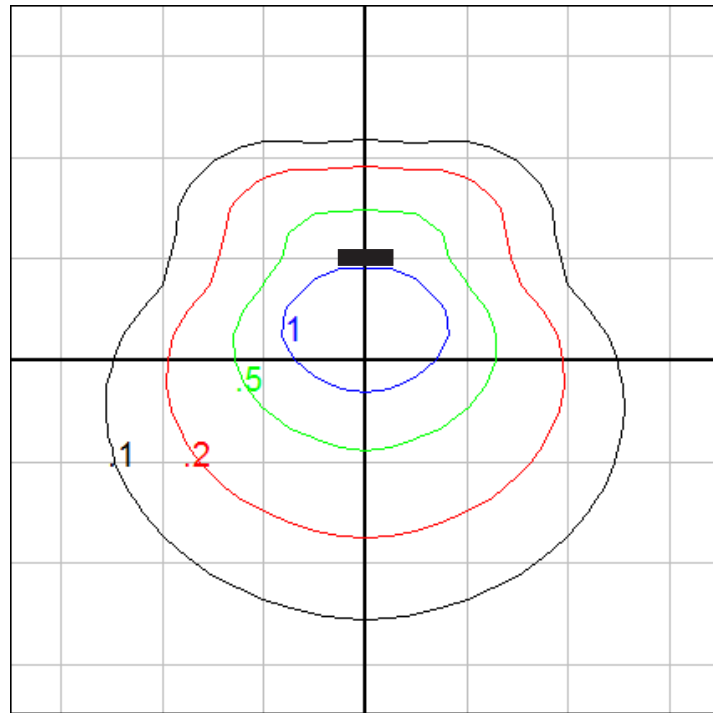

Wall mount - isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

7/25/2018