



BEGA

Photometric Filename: 24070.IES

TEST: BE_24070
TEST LAB: BEGA
DATE: 7/14/2017
LUMINAIRE: 24 070
LAMP: 11.5W LED




Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1011
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	67
Total Luminaire Watts	15
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.13 ft
Luminous Width (90-270)	0.69 ft
Luminous Height	0.69 ft

Zonal Lumen Summary

Zone	Lumens
0-10	2.99
10-20	12.39
20-30	27.23
30-40	45.43
40-50	64.34
50-60	81.50
60-70	94.92
70-80	104.20
80-90	108.72
90-100	107.87
100-110	100.46
110-120	87.24
120-130	70.03
130-140	50.72
140-150	31.74
150-160	15.67
160-170	4.85
170-180	0.42

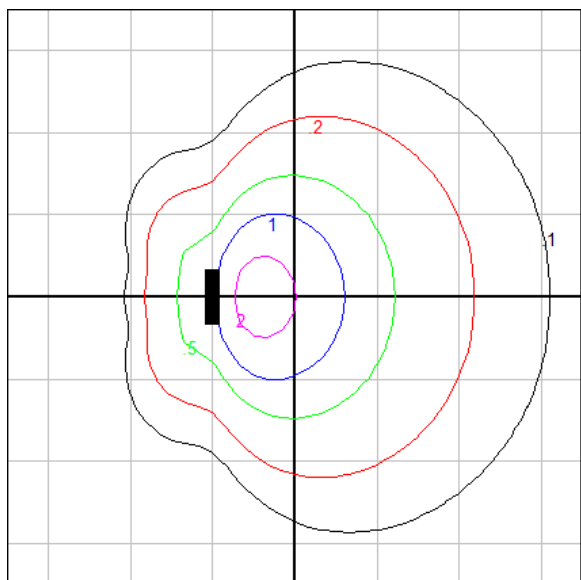

Mounting Height = 6 ft. Grid Spacing = 6 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/14/2018