


BEGA

Photometric Filename: 24813.IES

TEST: BE_24813
TEST LAB: BEGA
DATE: 8/29/2016
LUMINAIRE: 24 813
LAMP: 8.4W LED

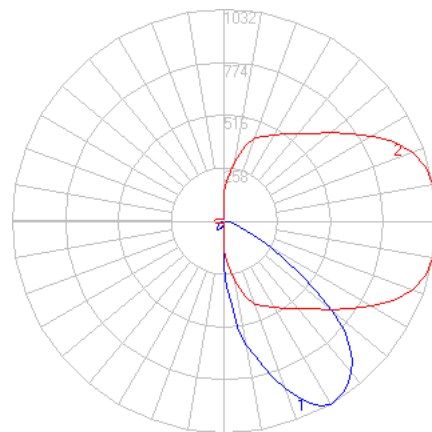


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	1027.5
Maximum Candela Angle	-5 H 29 V
Horizontal Beam Angle (50%)	51.8
Vertical Beam Angle (50%)	46.9
Horizontal Field Angle (10%)	70.7
Vertical Field Angle (10%)	70.6
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	456
Beam Efficiency	N.A.
Field Lumens	647
Field Efficiency	N.A.
Spill Lumens	70
Luminaire Lumens	717
Total Efficiency	N.A.
Total Luminaire Watts	11

Zonal Lumen Summary

Zone	Lumens
0-10	22.81
10-20	82.45
20-30	153.64
30-40	190.01
40-50	153.54
50-60	79.17
60-70	24.40
70-80	5.63
80-90	0.66
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

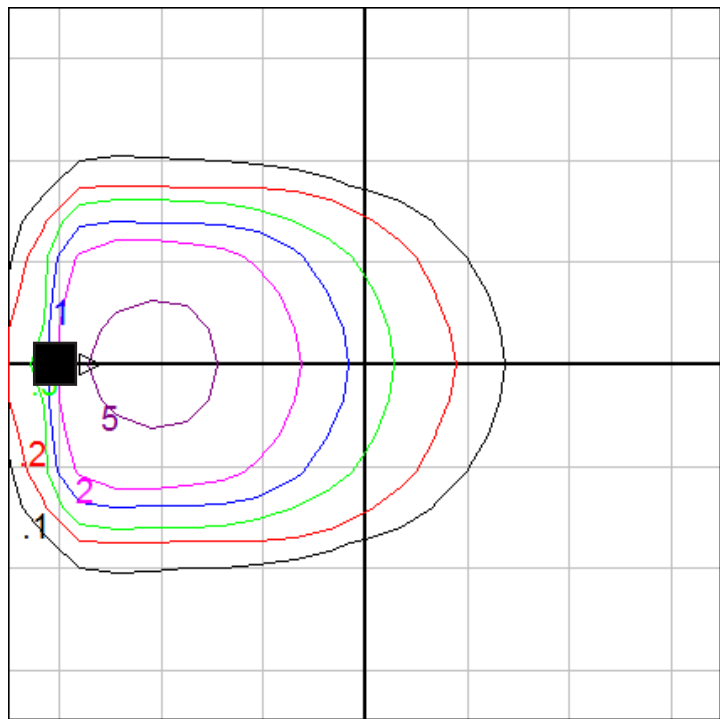

Mounting Height = 10 ft. Grid Spacing = 5 ft.

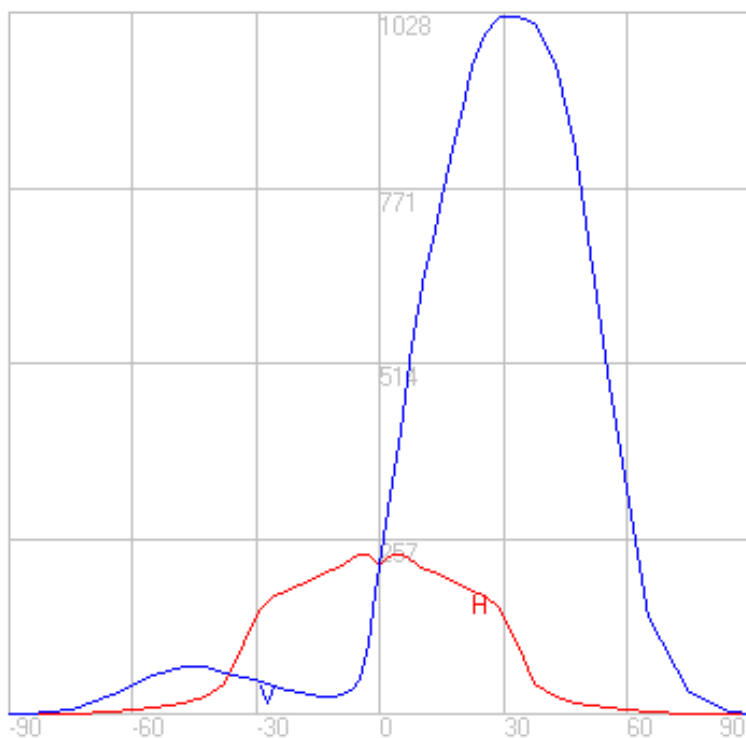

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/23/2018