


BEGA

Photometric Filename: 33150.IES

TEST: BE_33150
TEST LAB: BEGA
DATE: 03/27/2015
LUMINAIRE: 33 150
LAMP: 5.9W LED

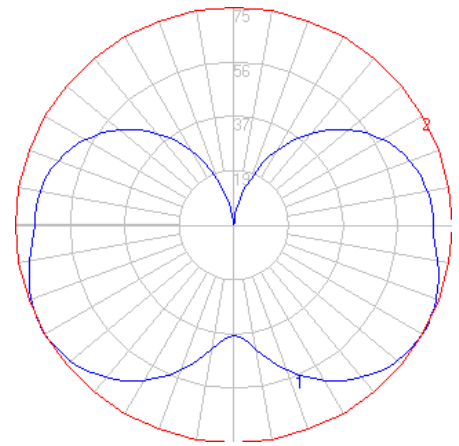


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	761
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	10
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.43 ft (Diameter)
Luminous Height	0.51 ft

Zonal Lumen Summary

Zone	Lumens
0-10	3.89
10-20	13.77
20-30	26.66
30-40	41.00
40-50	54.84
50-60	66.33
60-70	73.93
70-80	76.77
80-90	75.69
90-100	74.20
100-110	69.85
110-120	61.27
120-130	49.43
130-140	35.88
140-150	22.52
150-160	11.03
160-170	3.32
170-180	0.27

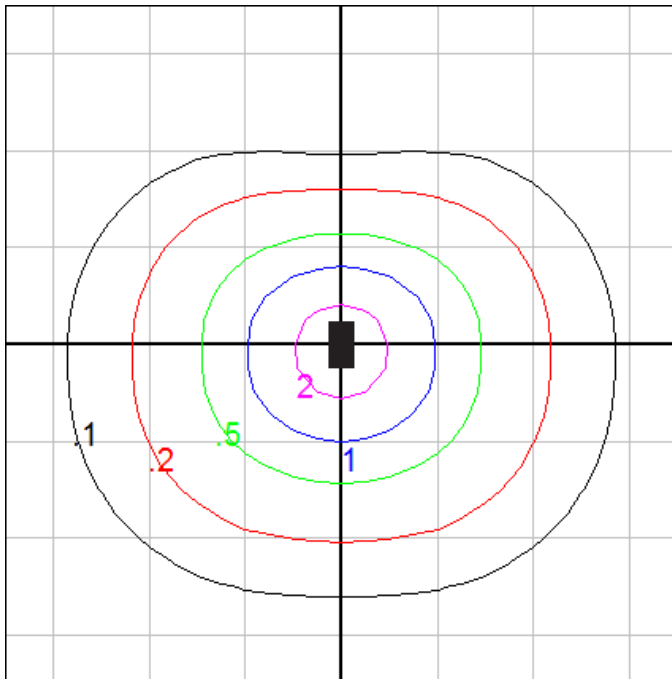

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

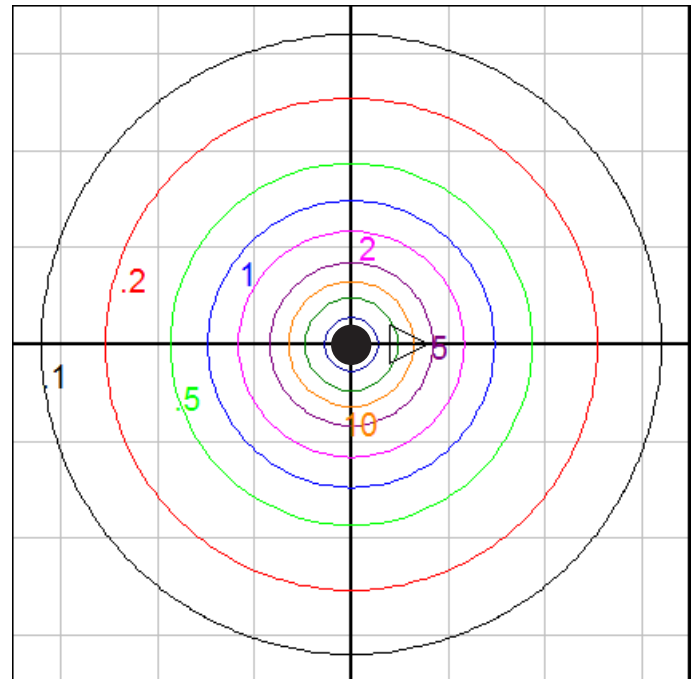

Wall Mount - Isofootcandle grid on wall
Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.