


BEGA

Photometric Filename: 33232.IES

TEST: BE_33232
TEST LAB: BEGA
DATE: 4/24/2018
LUMINAIRE: 33 232
LAMP: 3.8W LED

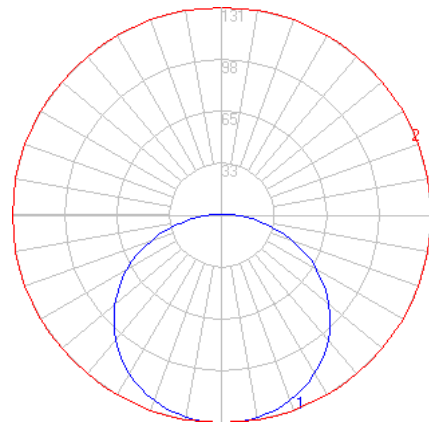


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	448
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	90
Total Luminaire Watts	5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.32
Spacing Criterion (90-270)	1.32
Spacing Criterion (Diagonal)	1.46
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.46 ft
Luminous Width (90-270)	0.46 ft
Luminous Height	0.07 ft

Zonal Lumen Summary

Zone	Lumens
0-10	12.40
10-20	36.00
20-30	55.72
30-40	69.17
40-50	74.64
50-60	71.30
60-70	59.23
70-80	40.11
80-90	19.48
90-100	7.56
100-110	2.53
110-120	0.29
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

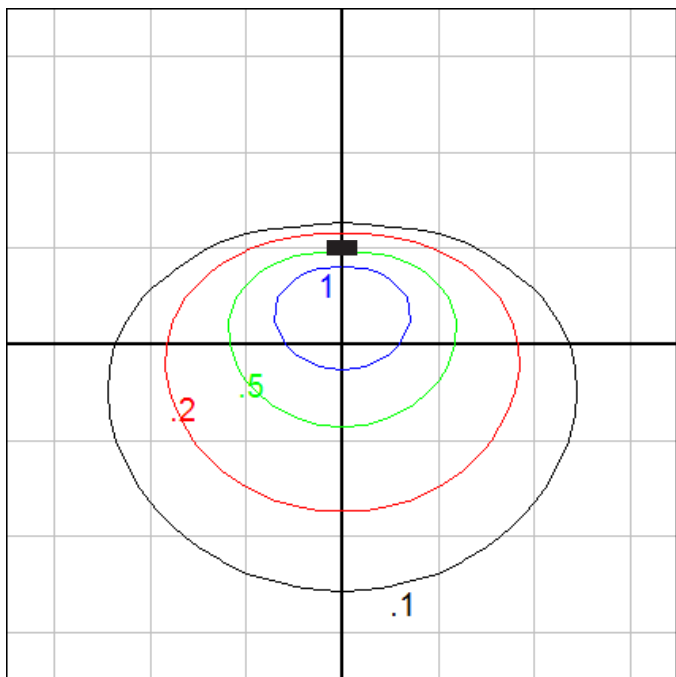

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

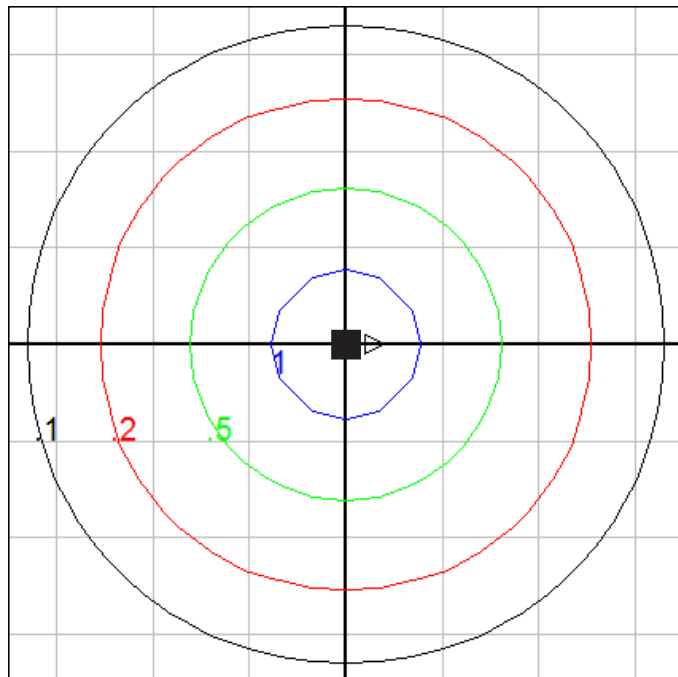

Ceiling Mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

4/24/2018