


BEGA

Photometric Filename: 33325.ies

TEST: BE_33325
TEST LAB: BEGA
DATE: 4/12/2018
LUMINAIRE: 33 325
LAMP: 3.9W LED

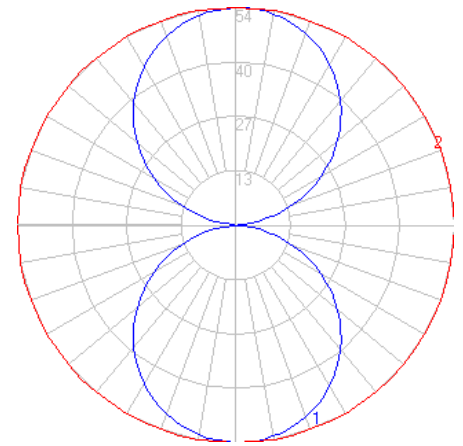


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	306
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	51
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.23 ft
Luminous Width (90-270)	0.59 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	5.06
10-20	14.49
20-30	22.00
30-40	26.61
40-50	27.71
50-60	25.12
60-70	19.09
70-80	10.52
80-90	2.33
90-100	2.33
100-110	10.52
110-120	19.09
120-130	25.12
130-140	27.71
140-150	26.61
150-160	22.00
160-170	14.49
170-180	5.06

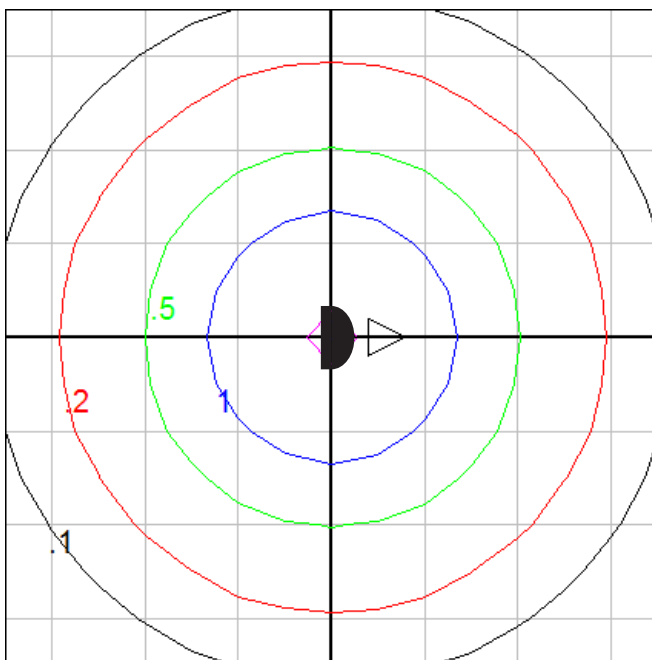

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 2.5 ft.

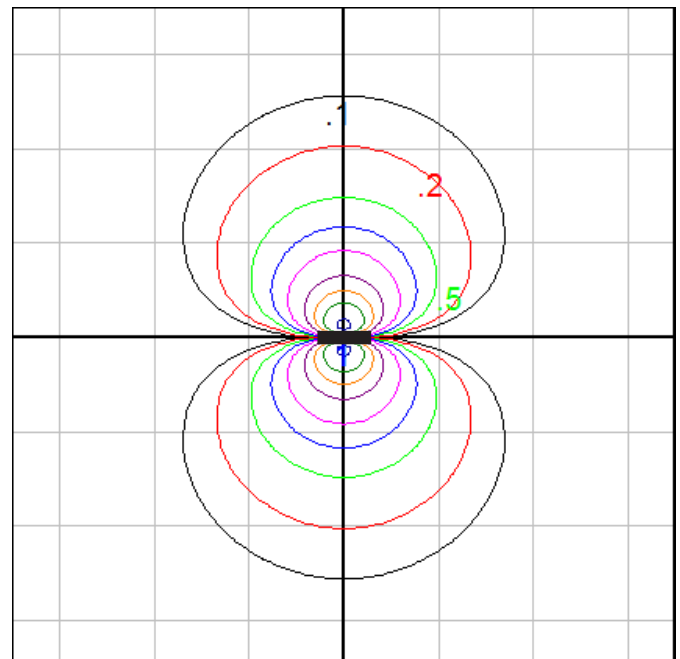

Wall Mount - Isofootcandle grid on wall
Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2015

11/5/2015