


BEGA

Photometric Filename: 33326.IES

TEST: BE_33326
TEST LAB: BEGA
DATE: 1/29/2018
LUMINAIRE: 33 326
LAMP: 7.9W LED

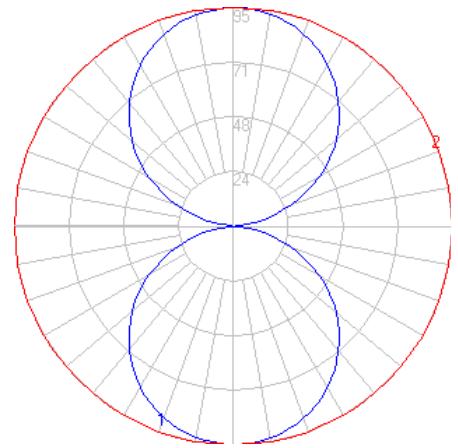


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	548
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	50
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.26 ft
Luminous Width (90-270)	0.92 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	9.01
10-20	25.87
20-30	39.36
30-40	47.70
40-50	49.78
50-60	45.14
60-70	34.23
70-80	18.76
80-90	4.08
90-100	4.08
100-110	18.76
110-120	34.23
120-130	45.14
130-140	49.78
140-150	47.70
150-160	39.36
160-170	25.87
170-180	9.01

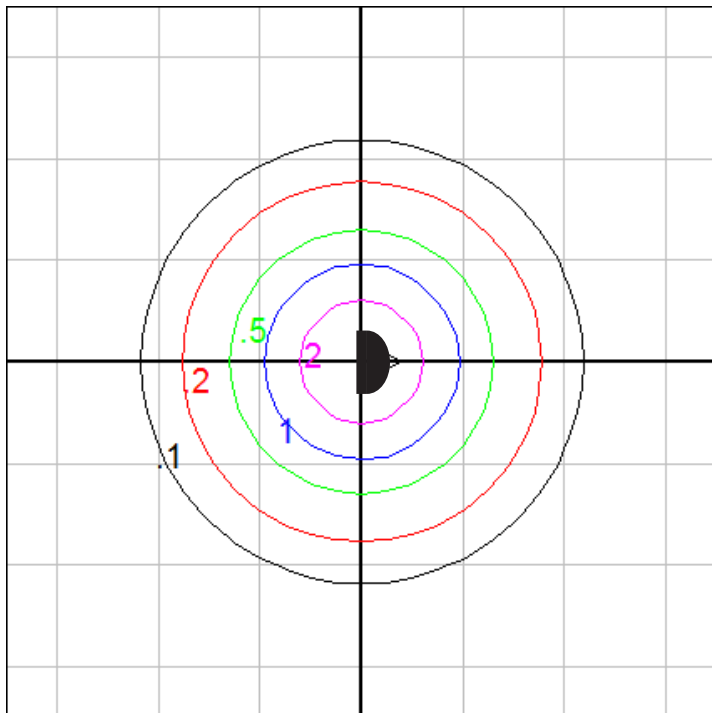

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 2.5 ft.

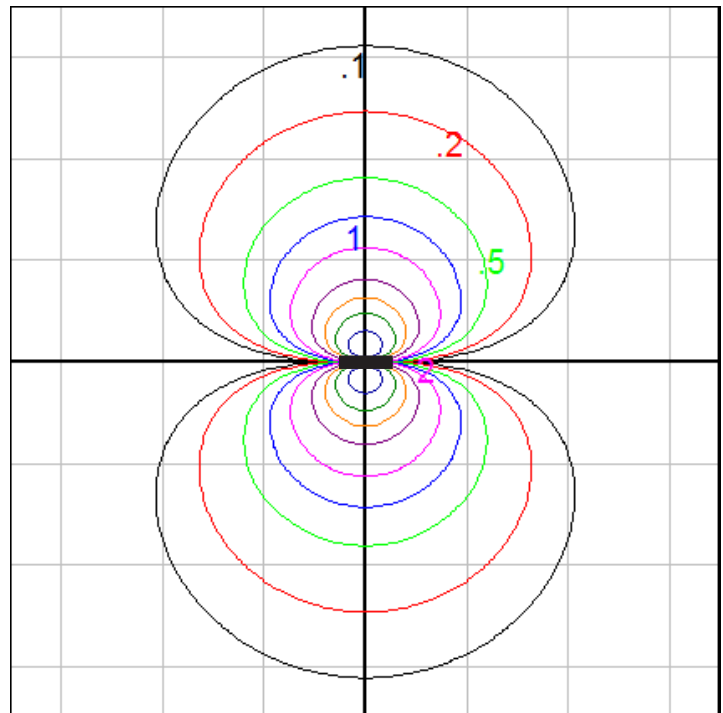

Wall Mount - Isofootcandle grid on wall
Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

8/8/2018